



HelixSwarm

Helix Swarm Guide

2018.2
September 2018

PERFORCE

www.perforce.com

© Perforce Software, Inc. All rights reserved.



Copyright © 2013-2018 Perforce Software.

All rights reserved.

Perforce Software and documentation is available from www.perforce.com. You can download and use Perforce programs, but you can not sell or redistribute them. You can download, print, copy, edit, and redistribute the documentation, but you can not sell it, or sell any documentation derived from it. You can not modify or attempt to reverse engineer the programs.

This product is subject to U.S. export control laws and regulations including, but not limited to, the U.S. Export Administration Regulations, the International Traffic in Arms Regulation requirements, and all applicable end-use, end-user and destination restrictions. Licensee shall not permit, directly or indirectly, use of any Perforce technology in or by any U.S. embargoed country or otherwise in violation of any U.S. export control laws and regulations.

Perforce programs and documents are available from our Web site as is. No warranty or support is provided. Warranties and support, along with higher capacity servers, are sold by Perforce Software.

Perforce Software assumes no responsibility or liability for any errors or inaccuracies that might appear in this book. By downloading and using our programs and documents you agree to these terms.

Perforce and Inter-File Branching are trademarks of Perforce Software.

All other brands or product names are trademarks or registered trademarks of their respective companies or organizations.

Any additional software included within Perforce Software is listed in "[License statements](#)" on page 612.

Contents

How to use this guide	15
Feedback	15
Other documentation	15
Syntax conventions	15
1 Helix Swarm	16
2 What's new in Swarm 2018.2	18
Important information	18
Upgrade process changed	18
PHP version support change from Swarm version 2019.1	18
New trigger script added for Swarm 2018.1	18
New trigger scripts added for Swarm 2018.2	18
Major new functionality	19
Minor new functionality	19
Technology preview features	20
Workflow	20
Known limitations	21
3 Quickstart	24
Swarm quick reference	24
Main toolbar and project tab quick reference	24
Dashboard page quick reference	26
Review list page quick reference	28
Review page quick reference	32
Swarm user tasks	46
Start a code review	46
Check for code reviews you need to act on	48
List reviews you are involved with	50
Contribute comments or code changes to a code review	50
Get a local copy of a review's code for evaluation	53
Fix 'not mergeable' errors in a review	56
View a list of Git-created reviews	58
Change the author of a review	58
Change your user notification settings	60
Unfollow all projects and users you are following	60
Swarm administration tasks	61

Change notification settings for a group	61
Manage project branches	62
Unfollow all projects and users for another user	70
Obliterate a review	72
Change the logging level	73
Check the queue workers	73
Integrate your test suite to inform review acceptance or rejection	74
Automatically deploy code within a review	78
4 Install and upgrade Swarm	79
Important restrictions	79
Review the runtime dependencies	79
Choose the installation process	79
Upgrade Swarm	81
Runtime dependencies	81
Supported operating system platforms	82
Apache web server	82
PHP	83
Helix Core Server requirements	84
Trigger dependencies	84
Worker dependencies	86
Supported web browsers	88
Optional dependencies	88
Security-enhanced Linux (SELinux)	88
Choose the installation process	89
Install and configure Swarm from a package	91
Installation	91
Post-installation configuration	96
SELinux on CentOS 7 configuration	104
Updating	106
Uninstall	107
Deploy and configure a Swarm VM from an OVA	107
Before you begin	107
Deploy the Swarm OVA	108
Finalize Swarm configuration	110
VMWare OVA import	112
Oracle VirtualBox import	112
Install and configure Swarm manually from a Tarball	113

Apache configuration	114
PHP configuration	119
Swarm configuration	124
Establish trigger token	127
Helix Core Server configuration for Swarm	127
Set up a recurring task to spawn workers	143
Post-install configuration options	148
Back up your Swarm virtual host first	148
HTTPS	149
Run Swarm in a sub-folder of an existing web site	155
Run Swarm's virtual host on a custom port	157
Upgrading Swarm	160
Upgrade a Swarm tarball installation	160
Update a Swarm package installation	166
Upgrade a Swarm OVA installation from Swarm 2014.1 or earlier	168
5 Basics	171
Dashboard	171
Filtering	173
Review fields	173
Activity streams	174
Files	175
Download files as a ZIP archive	176
Browsing deleted files and folders	177
File display	177
Commits	182
Range filter	182
File Commits	183
Remote depot commits	183
Jobs	184
Edit the Job columns	184
Job display	185
Add jobs	186
Unlinking jobs	187
Changelists	188
Changelist Display	188
Diffs	190

Viewing a diff	192
Comments	196
Adding comments	196
Editing comments	197
Tasks	198
Comment features	202
Mark comments as read	208
Mark comments as unread	209
Archiving comments	210
Restore comments	210
Users	211
Viewing your user profile	211
Viewing another user's profile	218
Viewing another user's profile when you have admin or super user privileges	219
Groups	220
Listing groups	221
Viewing a group	222
Projects	223
Listing projects	223
Viewing a project	224
Private projects	228
Workflows - Technology preview feature	229
Listing workflows	230
Viewing a workflow that you own	231
Viewing a shared workflow that you do not own	232
Notifications	233
@mention notifications	236
(1) Committed change notifications	237
(2) Review start notifications	237
(3) Moderator notifications	238
(4) Group member notifications	238
(5) Disable notifications	238
(6) Comment author notifications	238
(7) Tests have finished	239
Log in/Log out	239
Log in to Swarm	239
Log out of Swarm	239

require_login	240
Notable minor features	240
Quick URLs	240
@mention	241
Search	242
JIRA integration	242
Avatars	243
Following	243
Time	243
Keyboard shortcuts	243
About Swarm	244
Custom error pages	244
Short links	244
Mobile browser compatibility	244
Markdown	244
Markdown in comments	245
Markdown in projects	248
6 Code reviews	250
Benefits	250
Facilities	250
Workflow	251
Models	252
Pre-commit model	252
Post-commit model	252
Git Fusion model	252
Internal representation	253
Reviews list	256
Filtering reviews	258
Review display	262
Add Change button	262
Download .zip button	264
Deployment status	265
Test status	265
Review state button	265
Edit description	265
Tasks	265

Reviewers	267
Disable notifications	272
Changing the review author	272
Select review revisions to view	273
File listing	273
History tab	274
Mark file as read	275
Identifying reviews created with Git Fusion	275
Activities	275
Start a review	275
Update a review	277
Fetch a review's files	280
Deleting shelves	281
Edit reviewers	282
Add a changelist to a review	284
Append a pending changelist to a review	285
Replace review with a pending changelist	287
Replace review with a committed changelist	289
Responsibility	291
Moderators	291
Required reviewers	292
Add yourself as a reviewer	293
Remove yourself as a reviewer	293
Review workflow	293
Basic review workflow	294
Additional workflow tasks	295
Review creation, and modification outside of Swarm	297
States	299
Self-approval by review authors	300
State change restrictions with moderation	301
Required reviewers	302
Change review state	302
7 Groups	305
Add a group	305
Edit a group	312
Delete a group	312
8 Projects	313

Add a project	313
Edit a project	329
Membership	329
Add a member	330
Remove a member	331
Owners	331
Moderators	332
Default reviewers	333
Retain default reviewers	333
Delete a project	336
9 Workflows - Technology preview feature	338
Workflow overview	338
Workflow rules	339
Workflow basics	341
Example workflows	342
Merging multiple workflows	345
Add a workflow	348
Edit a workflow	352
Delete a workflow	353
10 Integrations	354
JIRA	354
Prerequisites for JIRA integration and job links in JIRA	355
Enabling the JIRA module	355
Enabling Perforce job links in JIRA issues	355
JIRA integration and Perforce job link workflow	357
LibreOffice	357
Limitations	358
Installation	359
Zip archive	359
Installation	359
Configuration	359
Download files as a Zip archive	360
11 Administration	362
Avatars	363
Disable avatar lookups	364
Backups	364

Changelist files limit	365
Client integration	365
Comment attachments	366
Comment mentions	368
Comments	368
Comment notification delay	368
Comment threading	369
Commit credit	370
Commit-edge deployment	370
P4V Authentication	371
Commit timeout	371
Configuration overview	371
Diff configuration	379
max_diffs	379
Email configuration	379
Sender	381
Transport	381
Recipients	381
notify_self	381
Use BCC	382
Use Reply-To	382
Save all messages to disk	382
Email headers	383
Emoji	384
Environment	384
mode	385
hostname	385
external_url	385
base_url	386
Excluding Users from Activity Streams	386
Files configuration	387
max_size	387
download_timeout	387
Groups configuration	387
Ignored users for reviews	388

License	388
Locale	388
Logging	389
Web server logging	390
Helix Core Server logs	390
Swarm logs	390
Trigger Token Errors	391
Performance logging	391
Mainline branch identification	392
Notifications	393
Global settings	395
OVA Management	398
Dependency Conflicts	399
P4TRUST	399
Projects	399
Restrict project name and branch definition editing to administrators	400
Limit adding projects to administrators	400
Limit adding projects to members of specific groups	401
Project readme	401
Projects tab initial fetch	402
Review cleanup	402
Review keyword	404
Review keyword configuration	404
Create a review	406
Add a changelist to a review	406
Reviews filter	409
result_sorting	409
date_field	410
Reviews	410
Disable self-approval of reviews by authors	410
Moderator behavior when a review spans multiple branches	411
Prevent Approve for reviews with open tasks	411
Protected end states	411
Process shelf file delete when	412
Allow author change	414
Allow author obliterate review	414

Synchronize review description	415
Expand all file limit	415
Expand group reviewers	415
Disable tests on approve and commit	416
More context lines	417
Obliterate Review	417
When you obliterate a review	417
Obliterate a review	418
Search	418
Security	419
Require login	419
Prevent login	420
Sessions	420
X-Frame-Options header	421
Disable commit	422
Restricted Changes	422
Limit adding projects to administrators	423
Limit adding projects to members of specific groups	423
IP address-based protections emulation	424
Disable system info	425
HTTP client options	425
Strict HTTPS	427
Apache security	427
PHP security	428
Short links	429
swarm_root	430
System Information	430
Log	431
PHP Info	431
Trigger options	432
Command-line options	432
Configuration items	436
Unapprove modified reviews	438
Uninstall Swarm	438
Background	439
Uninstall steps	439

Upgrade index	440
status_refresh_interval	440
batch_size	441
Users	441
Review preferences	441
Time preferences	442
Workers	443
Worker status	443
Worker configuration	444
Manually start workers	444
Manually restart workers	445
Workflow global rules - Technology preview feature	445
workflow	447
with_review	447
without_review	448
end_rules	449
counted_votes	449
auto_approve	450
12 Extending Swarm	451
Resources	451
jQuery	451
JavaScript Resources	451
PHP Resources	451
Zend Framework 2 Resources	452
Development mode	452
To enable development mode:	452
To disable development mode:	452
Modules	453
Influence activity events, emails, etc.	453
Templates	454
View helpers	454
Example linkify module	454
Example email module	457
CSS & JavaScript	465
Sample Javascript extensions	465
Sample CSS customizations	466

Swarm API	468
Authentication	468
Requests	469
GET information	469
POST new information	469
Update	470
Pagination	470
Responses	470
API versions	470
API Endpoints	471
Activity : Swarm Activity List	471
Changes : API controller providing a service for changes	480
Comments : Swarm Comments	483
Groups : Swarm Groups	497
Index : Basic API controller providing a simple version action	509
Login : Swarm Login API	510
Projects : Swarm Projects	515
Reviews : Swarm Reviews	537
Users : Basic API controller providing a simple version action	575
Workflows : Controller for querying, creating and updating workflows.	577
Extended API example	593
The code	594
Executing the example	600
Pending Review Cleanup	601
The code	601
Executing the script	610
Contact Perforce	611
License statements	612

How to use this guide

This guide tells you how to use Helix Swarm, for collaboration and code review for teams using Helix Core Server. It is intended for anyone using Swarm to perform code review tasks with Helix Server.

Feedback

How can we improve this manual? Email us at manual@perforce.com.

Other documentation

See <https://www.perforce.com/support/self-service-resources/documentation>.


Syntax conventions

Helix documentation uses the following syntax conventions to describe command line syntax.


Notation	Meaning
<code>literal</code>	Must be used in the command exactly as shown.
<i>italics</i>	A parameter for which you must supply specific information. For example, for a <i>serverid</i> parameter, supply the ID of the server.
<code>[-f]</code>	The enclosed elements are optional. Omit the brackets when you compose the command.
...	<ul style="list-style-type: none">Repeats as much as needed:<ul style="list-style-type: none"><code>alias-name [[\$(arg1) ... [\$(argn)]] =transformation</code>Recursive for all directory levels:<ul style="list-style-type: none"><code>clone perforce:1666 //depot/main/p4... ~/local-repos/main</code><code>p4 repos -e //gra.../rep...</code>
<code>element1 element2</code>	Either <i>element1</i> or <i>element2</i> is required.

1 | Helix Swarm


1. Watch Swarm Overview

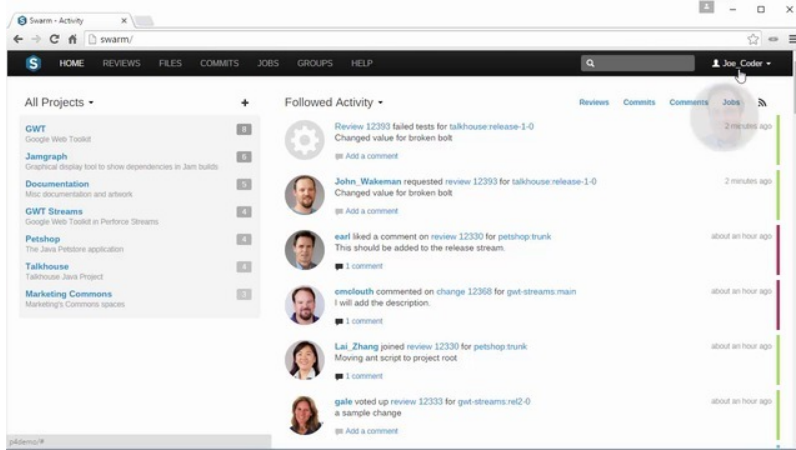


2. Create a Project

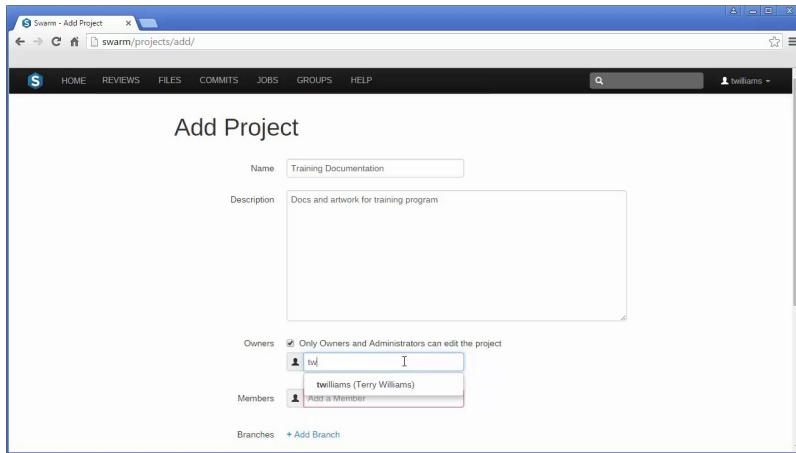

3. Create a Review

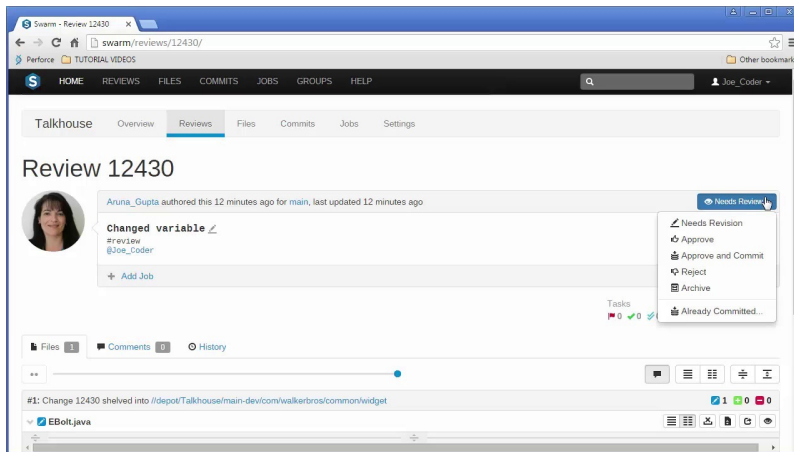

4. Collaborate on Reviews

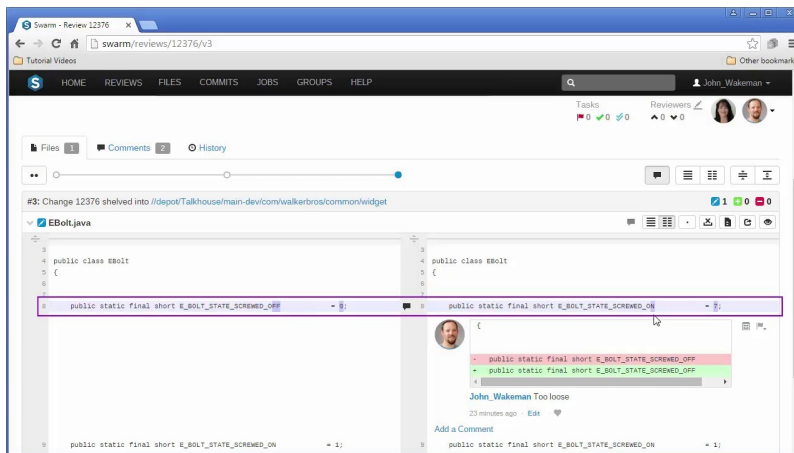

Swarm enables collaboration and code review for teams using Helix Server, helping ship quality software faster. Review code before or after commit, bring continuous integration into the review, and merge work that passed the review.

This documentation is structured with [quickstart](#) topics up front, for anyone experienced with code review but unfamiliar with Swarm, followed by chapters covering Swarm operations including [installing and configuring Swarm](#), [basic features](#), [managing projects](#), [code reviews](#), [integrations](#), [Swarm administration](#), [guidance on extending Swarm](#).

Download Swarm [here](#).

2 | What's new in Swarm 2018.2

This section provides a summary of the notable changes in Swarm for the 2018.2 release. Full details are available in the distribution's `RELNOTES.txt` file.

Important information

Upgrade process changed

The upgrade process changed for Swarm version 2017.3 and later.

- If you are upgrading from Swarm 2017.2 or earlier you should run the index upgrade, this ensures that the review activity history is displayed in the correct order on Dashboard, and Reviews list pages. See [Upgrading Swarm](#) for details.

Note

If you are upgrading from Swarm version 2017.3 or later, the index upgrade step is not required.

PHP version support change from Swarm version 2019.1

We are planning to remove support for versions of PHP older than 5.4 in Swarm 2019.1. This is part of our commitment to move away from using versions of platforms that have reached End-of-Life (EOL). This means that you will need to ensure that you can install PHP 5.4 or greater when Swarm 2019.1 becomes available.

New trigger script added for Swarm 2018.1

A new trigger script called `swarm.shelvedel shelve-del` has been added, this is a prerequisite for the new `process_shelf_delete_when` configurable. The trigger script must be added to the Helix Servertrigger table. Swarm checks for a supported Helix Server version when you install or upgrade Swarm. If a supported version of Helix Server is not found the `swarm.shelvedel shelve-delete` trigger and `process_shelf_delete_when configurable` are not supported, see [Helix Server requirements](#).

New trigger scripts added for Swarm 2018.2

The `swarm.enforce change-submit`, `swarm.strict change-content`, and `swarm.shelvesub shelve-submit` trigger lines were added in Swarm 2018.2, these are a prerequisite for the new Swarm [Workflow technology preview feature](#).

If the Workflow feature is enabled, the trigger lines must be added to the Helix Server trigger table. Any earlier `enforce` and `strict` triggers must be commented out, see [setup the trigger table](#).

Major new functionality

New Project page

The new Project page enables you to view, search, create, edit, and delete projects. For more information about the project page, see ["Projects" on page 223](#).

Exclusionary mapping for project branches

Project branches now support exclusionary mapping, see [branch mapping](#).

Moderator behavior when a review spans multiple branches

Swarm administrators can now specify the moderation logic when a review spans multiple branches that have moderators. By default, only one of the moderators from any one of the branches needs to approve the review but this can be configured so that reviews require one moderator from each branch to approve the review. For instructions on configuring moderator behavior, see ["Moderator behavior when a review spans multiple branches" on page 411](#).

Minimum up votes

You can now set the minimum number of up votes reviews require before they can be approved. Minimum up votes is set on [projects](#) and [branches](#).

Protected end states

You can now stop review content being changed if it is in a review state that is considered complete. The review states that are considered complete are set by the administrator, see [Protected end states](#).

Retain default reviewers

Prevent default reviewers being removed from reviews associated with projects and branches with **Retain default reviewers** enabled, see [Retain default reviewers](#).

Obliterate review

Users with *admin* or *super* user rights can now obliterate a review. Obliterate is used to permanently delete reviews that have been created by mistake. For instance, if a review is associated with the wrong changelist or a review contains sensitive information that should not be openly available. For more information about obliterating reviews, see [Obliterate review](#).

Minor new functionality

New trigger configuration items

TIMEOUT (optional): configure the number of seconds to wait before returning an error when communicating with the Swarm server.

IGNORE_TIMEOUT (optional): configure the action to take if communication with the Swarm server times out. For example, if you are submitting a large number of files to the Helix Server.


IGNORE_NOSERVER (optional): configure the action to take if communication with the Swarm server fails. For example, the Swarm server is down.

For more information about the new trigger configuration items, see [Configuration items](#).

New dashboard link

The dashboard is now accessed from the Swarm logo on the left of the main toolbar. The project sidebar has been removed from the dashboard page, projects now have a dedicated page. For an overview of the projects page, see ["Projects" on page 223](#).

New help link

The Swarm help documentation is now available from the **Help**  button to the right of your *userid* on the main toolbar.

Fixed Project file browser view

Directories and files are now displayed in the correct folder structure when browsing files with the project file browser. For instructions on how to use the project file browser, see [Project Files tab](#).

Fixed review ZIP download structure

When downloading files in a review using the **Download .zip** button, the content of the Zip archive now has the correct folder structure. For instructions on how to download files in a review as a zip file, see ["Download .zip button" on page 264](#).

New API endpoints

A number of new endpoints have been added to the API. See the [Swarm API](#).

Technology preview features

Warning**Technology preview features:**

Technology Preview features are currently unsupported, might not be functionally complete, and are not suitable for deployment in production. Technology preview features are subject to change and may be removed before they become fully supported features.

These features are provided to the customer to solicit interest and feedback, with the goal of full support in future releases. Customers are encouraged to provide feedback and functionality suggestions for Technology Preview features before they become fully supported.

Workflow

Workflow is a [technology preview feature](#) and is disabled by default.

Workflow rules

Swarm users can now create and manage workflows to ensure that changelists and code reviews in a project/branch follow the rules specified in that workflow. See [Workflow overview](#). A workflow is made up of a combination of the following rules (see [Workflow rules](#) for full details):

On commit without review: determine what happens when a changelist is committed without a review. Allow the commit, automatically create a review, or reject the commit.

On commit with a review: determine what happens when a changelist is committed with a review. Allow the commit or reject the commit unless the review is approved.

On update of a review in an end state: stop a review from being changed if it is in a review state that is considered complete. The review states that are considered complete are set by the administrator. Allow the review to be changed, or reject the change.

Count up votes from: define whose up votes count towards the **Minimum up votes** value set on the project/branch the review is associated with. All up votes count or only project member up votes count.

Automatically approve reviews: enable automatic approval of a review when all of its voting requirements are satisfied. Never automatically approve a review or automatically approve review.

Global workflow rules

Swarm administrators can now enforce individual workflow rules on projects/branches without an associated workflow or enforce a minimum workflow on the entire Helix Core Server. For more information about global workflow rules, see "[Workflow global rules - Technology preview feature](#)" on page 445.

New Workflow trigger scripts added in Swarm 2018.2

The `swarm.enforce change-submit`, `swarm.strict change-content`, and `swarm.shelvesub shelve-submit` trigger lines were added in Swarm 2018.2, these are a prerequisite for the new Swarm workflow rules.

If the Workflow feature is enabled, the trigger lines must be added to the Helix Server trigger table. Any earlier `enforce` and `strict` triggers must be commented out, see [setup the trigger table](#).

Workflow caveats

Possible performance issues on large Swarm systems

The Workflow [technology preview feature](#) has not been fully optimized and tested on Swarm systems with a large number of projects, branches, and paths.

Workflow trigger scripts have different functionality to the previous strict and enforce triggers

Trigger types `checkenforced`, `checkstrict`, and `checkshelve` were introduced in Swarm 2018.2 for the Workflow technology preview feature. The workflow triggers do not support the following trigger functionality available in Swarm 2018.1 and earlier:

- `-g group`: Specifies a group to exclude from `enforce` or `strict` verifications. Members of the group (including sub-groups) are not subject to `enforce` or `strict` verifications.
- `EXEMPT_FILE_COUNT`: When set to a positive integer, commits with a file count greater or equal to this value are exempt from `enforce` or `strict` verifications.
- `EXEMPT_EXTENSIONS`: A comma separated list of file extension. Commits with files having only these extensions are exempt from `enforce` or `strict` verifications.

To continue to use this functionality, you must keep your existing `enforce` and `strict` triggers and leave the [Workflow technology feature](#) disabled.

Known limitations

Access Control

Swarm maintains a variety of information in the Helix Core Server's keys facility. By default, users with list-level privileges can read these keys, which can include comments that contain excerpts of code they may not normally have access to. The Helix Core Server, version 2013.1/659207 or higher, has a configuration setting to require admin-level privileges for access to read and write keys. See "[Hiding Swarm storage from regular users](#)" on page 142.

Task Stream Reviews

Pre-commit reviews in a task stream are not yet supported.

Swarm OVA installation fails with a Run p4 login2 error

Issue: Swarm OVA deployment against an MFA enabled Helix Server fails with a **Run p4 login2** error.

Workaround: You must run **p4 login2** for a super user account that has MFA enabled before deploying the Swarm OVA. For **p4 login2** detail, see **p4 login2** in [P4 Command Reference](#).

Zip file does not include files marked for Add

Files **Marked for Add** in pre-commit reviews and shelved changelists are not included in the zip file.

Project Commits tab can fail to show some Helix Server commits in the top level view

The **Project Commits** tab top level client view is made up of all of the branches of the project.

For example, Project Alpha:

Branch: QA:

```
//depot/alpha/dev/QA/...
```

Branch: Dev :

```
//depot/alpha/dev/...
```

```
-//depot/alpha/dev/QA/...
```

The project commits tab view is generated by processing the branches in the order that they were created in and from top to bottom for the paths in each of those branches.

For the project Alpha example above:

The first path includes all of the directories and files under `//depot/alpha/dev/QA/` in the project commits tab top level view.

The second path includes all of the directories and files under `//depot/alpha/dev/` in the project commits tab top level view.

The third path excludes all of the directories and files in `//depot/alpha/dev/QA/` from the project commits tab top level view.

Result: commits made to `//depot/alpha/dev/QA/` that should be shown for the **QA** branch are not displayed in the **Project Commits** tab top level view.

When you have a simple branch structure this can be avoided by considering this issue when you create your branches. In the example above, creating the **Dev** branch first and then creating the **QA** branch avoids the problem because `//depot/alpha/dev/QA/` is not excluded from the **Project Commits** tab top level view.

Tip

Individual branch views display the commits correctly.

3 | Quickstart

Often, the best way to learn how software works is to try it. If the interface is sufficiently discoverable, you may not need to refer to documentation much, or at all. Sometimes, you just need to see the required steps to complete a task; that's what this chapter is all about.

Swarm quick reference	24
Swarm user tasks	46
Swarm administration tasks	61

Swarm quick reference


This section contains quick reference guides to help to familiarize you with Swarm:


Main toolbar and project tab quick reference

The main toolbar and project tab bar are used to quickly navigate around Swarm.

Main toolbar




- **Home** : click to display the [Dashboard](#), and [Activity](#) tabs.
- **Reviews**: click to display a list of open and closed reviews. For more information about the reviews list page, see ["Reviews list" on page 256](#).
- **Projects**: click to display a list of Swarm projects. For more information about the projects page, see ["Projects" on page 223](#).
- **Files**: click to display a list of files in the Helix Core Server, starting at the top level. For more information about the files page, see ["Files" on page 175](#).
- **Commits**: click to display a list of commits made in the Helix Core Server. For more information about the commits page, see ["Commits" on page 182](#).
- **Jobs** (only displayed if Perforce jobs are configured): click to display a list of Perforce jobs in the Helix Core Server. For more information about the jobs page, see ["Jobs" on page 184](#).
- **Groups** (displayed by default but can be hidden by administrator, see ["Groups configuration" on page 387](#)): click to display the Helix Core Server groups in Swarm, see ["Groups" on page 305](#).
- **Workflows** (only displayed if the Workflow feature is enabled): click to display a list of Swarm workflows. For more information about the workflows page, see ["Workflows - Technology preview feature" on page 229](#).


- **Search:** search for projects, groups, users, and files that match your search string.
- **LOG IN** (only displayed if you are not logged in to Swarm): click to log in to Swarm, see [Log in to Swarm](#).
- **Userid** dropdown menu (only displayed if you are logged in to Swarm):
 - **Profile:** click for your activity, shelves, profile settings, and notification settings. For more information about your profile, see ["Viewing your user profile" on page 211](#).
 - **About: Swarm:** click to view Swarm version information.
If you are a user with *super* privileges, Swarm also displays the trigger token required when you configure Helix Core Server for Swarm.
 - **Log out:** log out of Swarm, see ["Log out of Swarm" on page 239](#).
- **Help** : click to view the Swarm help.

Project tab bar

1. Click the **Projects** link in the Swarm main menu bar.
2. Select a project from the [projects page](#).

The project overview page is displayed below the Project menu bar:

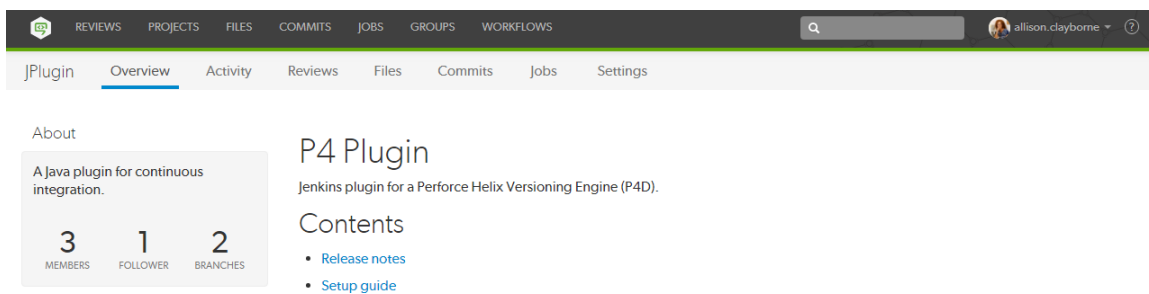

- **Overview** (only displayed if there is a README.md page in the project's mainline, see ["Markdown in projects" on page 248](#)): click to display an overview of the project. For more information about the project overview tab, see ["Overview tab" on page 225](#).
- **Activity:** click to display the activity stream for the project. For more information about the project activity tab, see ["Activity tab" on page 226](#).
- **Reviews:** click to display a list of open and closed code reviews for the project. For more information about the project reviews tab, see ["Reviews tab" on page 226](#).
- **Files:** click to display a list of files for the project. The project Files tab shows a list of files for the project, starting with a folder view representing each branch. Branches are designated with the *branch* icon . For more information about the files tab, see ["Files tab" on page 227](#).
- **Commits:** click to display a list of changes made to the project. For more information about the commits tab, see ["Commits tab" on page 227](#).


- **Jobs** (only displayed if Perforce jobs are configured): click to display a list of jobs associated with the project. For more information about the jobs tab, see "[Jobs tab](#)" on page 228.
- **Settings** (only displayed if you have permission to edit the project): click to display the project settings. For instructions on how to change the project settings, see "[Add a project](#)" on page 313.


Dashboard page quick reference

The purpose of the dashboard is to allow you to focus on reviews that need to be done, so that other users are not blocked. The dashboard lists the most recently modified reviews first, and shows your role in the review.












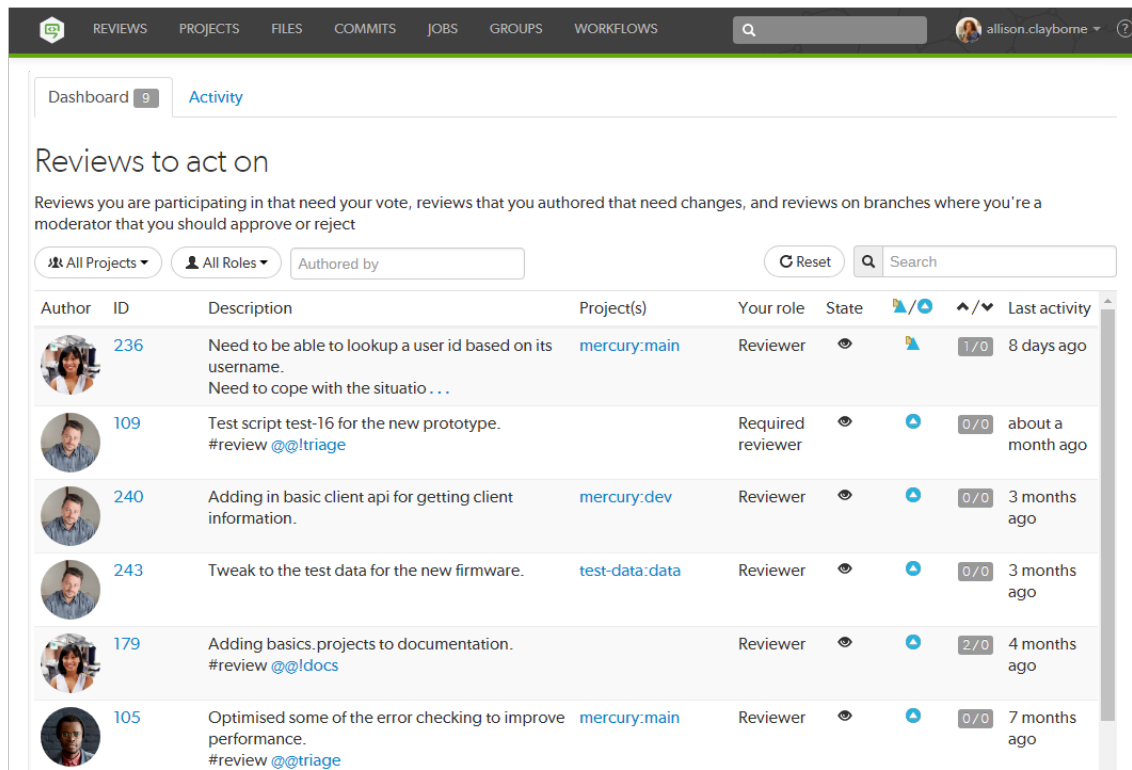
Note

Since it is tied to the logged in user, the dashboard is only populated if you are logged in.

1. Log in to Swarm.
2. If the Swarm dashboard is not already displayed, click the **Swarm Home**  icon on the left of the main toolbar.



The screenshot shows the Swarm dashboard interface. At the top, there is a navigation bar with tabs for REVIEWS, PROJECTS, FILES, COMMITS, JOBS, GROUPS, and WORKFLOWS. A search bar and a user profile for 'allison.clayborne' are also visible. Below the navigation bar, the main content area is titled 'Reviews to act on' and includes a sub-header: 'Reviews you are participating in that need your vote, reviews that you authored that need changes, and reviews on branches where you're a moderator that you should approve or reject'. There are filters for 'All Projects', 'All Roles', and 'Authored by', along with a 'Reset' button and a search input. The main content is a table of reviews with columns for Author, ID, Description, Project(s), Your role, State, and Last activity.

Author	ID	Description	Project(s)	Your role	State	Last activity
	236	Need to be able to lookup a user id based on its username. Need to cope with the situatio . . .	mercury:main	Reviewer		1/0 8 days ago
	109	Test script test-16 for the new prototype. #review @@ltriage		Required reviewer		0/0 about a month ago
	240	Adding in basic client api for getting client information.	mercury:dev	Reviewer		0/0 3 months ago
	243	Tweak to the test data for the new firmware.	test-data:data	Reviewer		0/0 3 months ago
	179	Adding basics.projects to documentation. #review @@ldocs		Reviewer		2/0 4 months ago
	105	Optimised some of the error checking to improve performance. #review @@ltriage	mercury:main	Reviewer		0/0 7 months ago

Jump directly to a specific area of the dashboard page using the following links:

- ["Dashboard filters" below](#)
- ["Dashboard content" below](#)

Dashboard filters



The filters are used to filter your dashboard reviews, the following filters are available:

- **Projects:** filter by the project the review is part of, limiting results to **My Projects** (projects you are an owner of or a member of) or to an individual project. The **All Projects** drop down will only show projects for which there are reviews in your dashboard.
- **Roles:** filter by your specific role in a review, limiting results to reviews for which you are the author, a reviewer, a required reviewer, or a moderator. The **All Roles** drop down will only show roles for which there are reviews in your dashboard.
- **Authored by:** filter the reviews to only those that have been authored by a certain user. Type in this field to get a drop down list of users to filter by.
- **Reset** button: click to reset all dashboard filters back to their defaults.
- **Search:** filter the reviews by searching the review descriptions.

Dashboard content

The dashboard displays a summary for each review.

Author	ID	Description	Project(s)	Your role	State				Last activity
	240	Adding in basic client api for getting client information.	mercury:dev	Reviewer					0/0 2 months ago

- **Author** avatar: the review author's avatar, hover over the avatar to see the ID and name of the review author. Click on the avatar to go to the profile of the review author, see ["Viewing another user's profile" on page 218](#).
- **ID:** the unique number used to identify the Swarm review. Click the review ID to display the review, see ["Review display" on page 262](#).
- **Description:** the review description may be truncated if it is too long, in which case click on the ellipsis ... to expand it.
- **Project(s):** lists the project branches this review covers. A review may span multiple branches and projects. Click a branch link to navigate to the project page for that branch.
- **Your role:** displays your role in the review and is the reason the review is in your dashboard. This can be Author, Reviewer, Required Reviewer, or Moderator.
- **State:** a review can be in one of the following states:

- **Needs Review:** the review has started and the changes need to be reviewed.
- **Needs Revision:** the changes have been reviewed and the reviewer has indicated that further revisions are required.
- **Approved:** the review has been approved. The changes may need to be committed.

Note

The Approved state only applies to review authors, it is only shown for a review that has been approved but has not been committed.

- **Type:** displays the type of review, either a [pre-commit review](#) or a [post-commit review](#).
- **Votes up/down:** displays the number of up votes and down votes for the review.
- **Last activity:** displays the last time that any changes were made to the review, including votes, comments, commits, and file changes.

Review list page quick reference

The **Reviews** page lists code reviews that are in progress, and code reviews that are complete..

1. Log in to Swarm.
2. Click the **Reviews** link in the main toolbar.

ID	Description	Project	Created	Actions
234	Updating tests for test-19.txt,	test-data:data	26 days ago	View, Upvote, Downvote, Comment, Share, More
232	Updating tests for test-18.txt,	test-data:data	26 days ago	View, Upvote, Downvote, Comment, Share, More
230	Updating tests for test-17.txt,	test-data:data	26 days ago	View, Upvote, Downvote, Comment, Share, More

Jump directly to a specific area of the **Reviews** page using the following links:

- ["Opened and Closed tabs" below](#)
- ["Review filters" on the next page](#)
- ["Reviews list content" on page 31](#)

Opened and Closed tabs

The **Opened** and **Closed** tabs display:

- **Opened** tab: displays a list of all code reviews that have started, are being reviewed, are awaiting revisions, or need to be committed.
- **Closed** tab: displays a list of all code reviews that have been approved and committed, rejected, or archived.

Review filters




Tip

Swarm updates the URL in your browser to reflect filtering options. This makes it easy to bookmark or share review list URLs. Swarm maintains the current filtering if you click on a review link and then use your browser's back button to return to the review list.

The following filters are available (from left to right):

- **Projects** dropdown: filter by the project the review is part, options are:



- **All Projects:** displays all reviews for all projects.
 - **My Projects:** displays all reviews for all of the projects you are participating in, as a member, owner, moderator, or follower.
 - **Project Search:** an auto-complete search field that allows you to choose one of the projects defined in Helix Server. Once specified, only reviews for the selected project are displayed. Click the **X** button to remove a *projectid* after it has been specified.
 - **Select Project:** selecting a project name only displays reviews for that project.
- **Users** dropdown: filter by the author of the review, options are:



- **All:** displays all reviews.
 - **Reviews I've Authored:** displays reviews that you have authored.
 - **Reviews I'm Participating In:** displays reviews that you are a reviewer of, but not an author of.
 - **Review I've Authored Or Am Participating In:** displays reviews that you have authored, or are a reviewer of.
 - **Author Search:** an auto-complete search field that allows you to choose one of the user accounts defined in the Helix Server. Once specified, only reviews authored by the user are displayed. Click the **X** button to remove a *userid* after it has been specified.
- **Reviewer presence** buttons, (**Opened** tab only):



- **Has Reviewers:** displays reviews that have one or more reviewers.
 - **No Reviewers:** displays reviews that have no reviewers.
- **Review state** buttons, (**Opened** tab):



- **Needs review:** displays reviews that need to be reviewed.
 - **Needs revision:** displays reviews that have been reviewed, but need further revisions before the review can be accepted.
 - **Approved:** displays reviews that have been approved, and should be committed.
- **Review state** buttons, (**Closed** tab):



- **Approved:** displays reviews that have been approved and committed.
 - **Rejected:** displays reviews that have been rejected.
 - **Archived:** displays reviews that have been archived.
- **Test status** buttons (when automated tests are enabled for the associated project):



- **Tests pass** displays reviews that have passed tests.
 - **Tests fail:** displays reviews that have failed tests.
- **Vote status** buttons:



- **Voted up:** displays reviews that you have voted up.
- **Voted down:** displays reviews that you have voted down.
- **Not voted:** displays reviews that you are participating in and that you have not voted.

Note

Filters for voting only apply to reviews which you are a participant of. Commenting on or voting on a review will automatically add you as a participant. If you leave the review after commenting on it, then this review will not be included in the list.

- **Comment status** buttons:



- **Has comments:** displays reviews that you have commented on.
- **Does not have comments:** displays reviews that you have not commented on.

Note

Filters for voting only apply to reviews which you are a participant of. Commenting on or voting on a review will automatically add you as a participant. If you leave the review after commenting on it, then this review will not be included in the list.

- **Bookmark:** review filters can be remembered by bookmarking the page, this icon acts as a reminder of that.



- **Search:** searches the review description and displays reviews that match your search string.



Reviews list content

The review list displays a summary for each review.

ID	Description	Project	Created ▾					
234	Updating tests for test-19.txt,	test-data: data	26 days ago					
232	Updating tests for test-18.txt,	test-data: data	26 days ago					
230	Updating tests for test-17.txt,	test-data: data	26 days ago					





- **ID:** the unique number used to identify the Swarm review. Click the review ID to display the review, see ["Review display" on page 262](#).
- **Author avatar:** the review author's avatar, hover over the avatar to see the ID and name of the review author. Click on the avatar to go to the profile of the review author, see ["Viewing another user's profile" on page 218](#).
- **Description:** the review description will be truncated if it is too long, in which case click on the ellipsis ... to expand it.
- **Project:** lists the project branches this review covers. A review may span multiple branches and projects. Click a branch link to navigate to the project page for that branch.
- **Result order dropdown:** click to change the order the reviews are displayed in, options are:



- **Created:** Reviews sorted by when they were created
- **Last activity:** Reviews sorted by when they were last updated


Note

- If the **Result order** button is not displayed reviews are sorted by when they were created.
- **Result order** button display is a global setting controlled by the Swarm administrator. See "[Reviews filter](#)" on page 409 for details.
- When review results are older than 24 hours they are displayed in numerical order within each day.


- **State:** a review can be in one of the following states:
 - **Needs Review:** the review has started and the changes need to be reviewed.
 - **Needs Revision:** the changes have been reviewed and the reviewer has indicated that further revisions are required.
 - **Approved:** the review has been approved. The changes may need to be committed.
- **Test Status:** displays the test status for the review, either tests passed  or tests failed .
- **Type:** displays the type of review, either a [pre-commit review](#)  or a [post-commit review](#) .
- **Comments:** displays the number of comments for the review.
- **Votes:** displays the number of up votes and down votes for the review.

Review page quick reference

The Swarm review page is used when reviewing changes:

1. Log in to Swarm.
2. To display the Swarm home page, click the **Swarm Home**  icon on the left of the main toolbar.
3. If your dashboard is not already displayed, click the **Dashboard** tab.

4. To open a review, click the ID of the review.

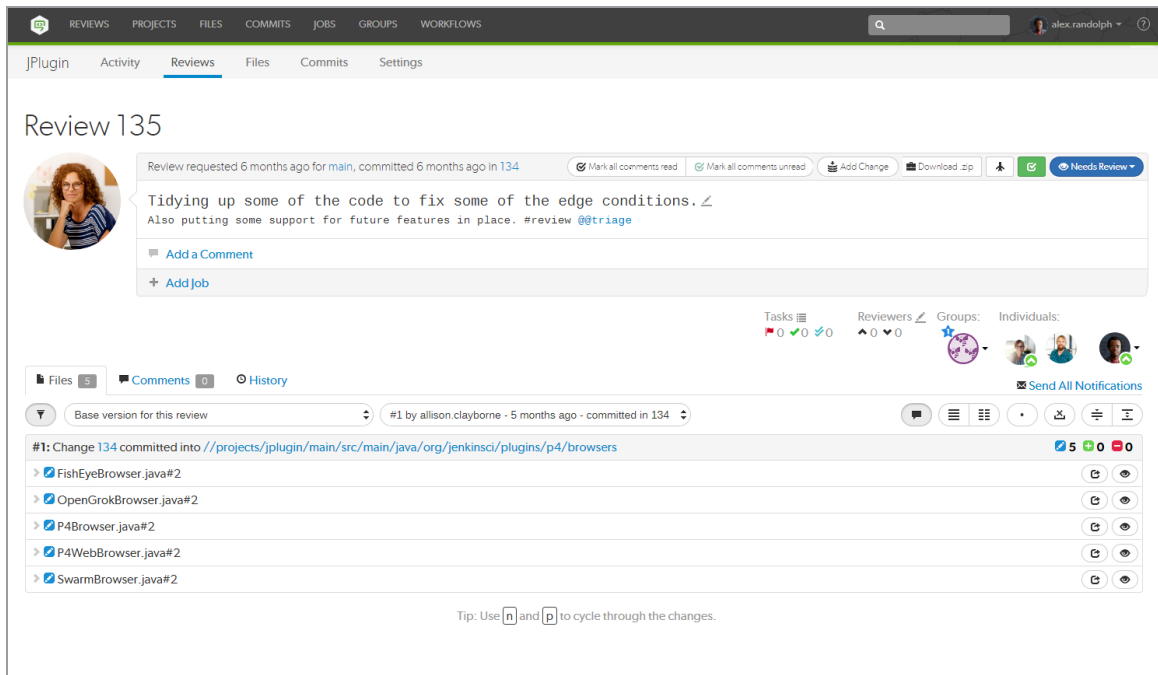

Jump directly to a specific area of the review page using the following links:

- "Review description" below
- "Tasks, author, and reviewer area" on page 37
- "Files tab" on page 38
 - "File diff view" on page 40
- "Comments tab" on page 42
 - "Comment view" on page 43
 - "Add a comment" on page 44
- "History tab" on page 45

Review description





Review 135




The review description is made up of the following elements (from left to right):

- **Review ID:** the unique number used to identify the Swarm review.
- **Review author** avatar: the review author's avatar, hover over the avatar to see the ID and name of the review author. Click on the avatar to go to the profile of the review author, see "[Viewing another user's profile](#)" on page 218.


■ **Review header:**

- **Review information:** displays when the review was requested, the project branch the files are in, when the review was committed, and the changelist that the review was requested for.
- **Mark all comments read** button: click to mark all of the comments on this review as read, see "[Mark comments as read](#)" on page 208.
- **Mark all comments unread** button: click to mark all of the comments on this review as unread, see "[Mark comments as unread](#)" on page 209.
- **Add Change** button: click to add a changelist to the review. Options available depend on whether the review is [pre-commit](#) or [post-commit](#). For information about adding a changelist to a review, see "[Add Change button](#)" on page 262.
- **Download .zip** button (if configured): click to download a compressed archive of all of the files in the review, see "[Download files as a ZIP archive](#)" on page 55.
- **Deployment status** button (if configured): indicates the success  or failure  of the review deployment. If your deployment system provides a URL to the deployment you can click it and view the deployment results.
- **Test status** button (if configured): indicates the success  or failure  of the review tests. If your continuous integration tests can provide a URL that provides details of a test run you can click it to view the test details.

- **Review state** button: indicates the current state of the review and is used to change the state of the review:
 - **Review states:** a review can be in one of the following states:
 - **Needs Review:** the review has started and the changes need to be reviewed.
 - **Needs Revision:** the changes have been reviewed and the reviewer has indicated that further revisions are required.
 - **Approved:** the review has been approved. The changes may need to be committed.
 - **Rejected:** the review has been completed. The changes are undesirable and should not be committed.
 - **Archived:** the review has been completed for now but it is not rejected, or approved. The review has been filed away in case it is needed in the future.
 - **Change review state:** click the **Review State** button and select a new state from the review dropdown menu. State change options are only displayed if you are authorized to make the state change:
 - **Needs Revision:** select to request changes to the files in the review.
 - **Needs Review:** select to request further review of the changes.
 - **Approve** (only available if the voting requirements for the review are satisfied. For information on voting requirements, see "[Required reviewers](#)" on page 292.): select to approve the review.
 - **Commit** (only available for [pre-commit](#) reviews that have been approved): select to commit the review.
 - **Approve and Commit** (only available for unapproved [pre-commit](#) reviews when the voting requirements for the review are satisfied. For information on voting requirements, see "[Required reviewers](#)" on page 292.): select to approve and commit the review in a single step, see "[Approve and Commit](#)" on page 303.
 - **Archive:** select to archive the review.
 - **Obliterate Review** (by default, only available for users with *admin* or *super* user rights): see "[Obliterate Review](#)" on page 417.
- **Review description:** the review description is automatically copied from the changelist that was originally used to create the review. To change the review description, by click the **Edit Description**  button.
- **Add a Comment** button: click to add a comment to the review description, view existing description comments, or hide existing description comments, see "[Commenting on a changelist or review description](#)" on page 197.

- **Jobs** (if configured): Perforce jobs can be linked to the review. For more information on Perforce jobs, see ["Jobs" on page 184](#).
 - **+ Add Job** link: click to add a job to the review. Select the job from the dialog that is displayed. For more information on linking a job to a review, see ["Add jobs" on page 186](#).
 - **jobnnnnnn** (where **nnnnnn** is the job number): click the job number to view details of the Perforce job. For more information about Perforce jobs, see ["Job display" on page 185](#).
 - **Unlink Job ✕** button: to unlink a job from the review, click the **Unlink Job ✕** button to the left of the job you are unlinking from the review.

Tasks, author, and reviewer area

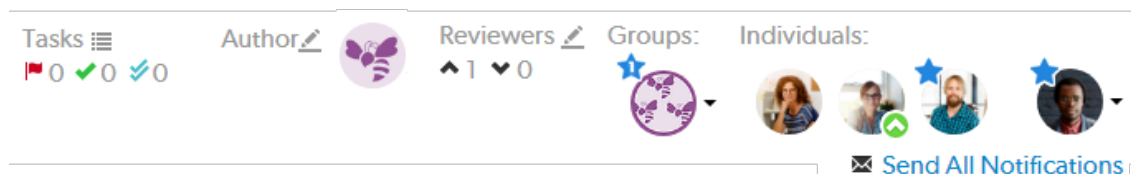

The tasks, author and reviewers area is made up of the following elements (from left to right):

■ Tasks

- **Tasks list** button: click to display a dialog listing all tasks associated with the review. The task list can be filtered by task type, and tasks can be viewed from the task list, see ["Task list" on page 200](#).
- **Task Summary** icons: shows a summary of the number, and status of comments flagged as tasks for the review. For more information about tasks, see ["Tasks" on page 198](#).
 - **Red Flag** icon: indicates the numbers of open tasks on the review.
 - **Green Check Mark** icon: indicates the numbers of tasks that have been addressed on the review.
 - **Blue Double-Check Mark** icon: indicates the number of tasks that have been addressed and verified on the review.

■ Author:

- **Edit Author** button (if enabled): click to change the review author, see ["Changing the review author" on page 272](#).
- **Review author** avatar: the review author's avatar, see ["Avatars" on page 243](#).


■ Reviewers:

- **Edit Reviewer** button (if enabled): click to edit the reviewers for the review
- **Up** vote and **Down** vote count: indicates the number of up votes and down votes the review has.


- **Groups:** lists groups that are reviewers for the review. When at least one person in the group has voted, the avatar displays a badge indicating whether the group, as a whole, has voted up or down. Click on the group to see who has voted, and how they have voted, see "[Group reviewer](#)" on page 267.
- **Individuals:** lists individuals that are reviewers for the review. When an individual has voted on the review, their avatar displays a badge indicating whether they voted up or down. For more information about individual reviewers, see "[Individual reviewer](#)" on page 269.
- Your **Avatar**, located to the right of the reviewers: click your avatar to interact with the review. This allows you to join the review, leave the review, vote up, vote down, clear your vote, disable notifications for this review, make your vote optional, or make your vote required. For more information about interacting with the review, see "[Reviewers](#)" on page 267.
- **Send All Notifications** link: comment notifications are delayed by default, click to manually send the notification immediately for the review. For more information about comment notification delay, see "[Comment notification delay](#)" on page 202.

Files tab

Use the **Files** tab to view the files in the review and to see how they have changed using the Swarm diff view.

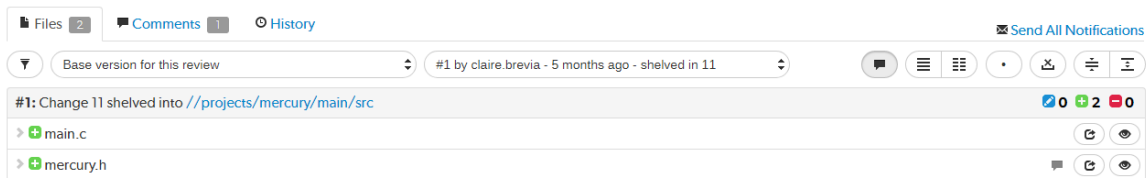

The **Files** tab is made up of the following elements (from left to right):

- **Filter comments**  button: click to limit displayed comments to those made on the selected review version.
- **Review revision selectors:** select which revisions of the review you want to diff. For details on using the revision selectors, see "[Select review revisions to view](#)" on page 273.
- **Global diff view** buttons (from left to right): control the initial diff view for all of the files in the review:



- **Show Comments** button: toggles the display of comments to inline in files or only in the **Comments** tab.
- **Show Diffs In-Line** button: displays all diffs as inline.
- **Show Diffs Side-by-Side** button: displays all diffs as side-by-side.
- **Toggle Show Whitespace** button: toggles the display of whitespace characters (such as space, tab, and newline) for all files.
- **Toggle Ignore Whitespace** button: toggles the highlighting of whitespace changes in all of the file diffs.
 - **Highlight whitespace changes:** makes it easier to identify changes in file types where whitespace is important. This is the default value.
 - **Ignore whitespace changes:** whitespace changes are not highlighted, this makes it easier to see the important changes in file types where whitespace changes are not important.
- **Collapse All** button: collapses all files
- **Expand All** button: expands all files. By default this button is disabled if there are more than 10 files in the review. For details, see [Expand All Limit](#)

Tip

The default states for the **Show Comments**, **Show Diffs Side-by-Side**, **Toggle Show Whitespace**, and **Toggle Ignore Whitespace** buttons are set in your user settings, see [User Settings](#).

- **File listing** header:
 - Comparing the files in the latest version of the review to Base or Head: displays the current version of the files in the review, the changelist that the review is based on, and the common path for the review files.
 - Comparing two versions of the review files: displays which two versions of the review files are being compared, which changelists the files are in, and the common path for the files in both versions of the review.
- **File change type** icons: indicate the type of change for each file in the review:
 - Added/Branched/Imported
 - Edited/Integrated
 - Deleted
- **File diff view** buttons (from left to right): control the diff view for each individual file:



- **Comments in File** icon (only displayed if the file contains comments): indicates that the file contains comments.
- **Show In-line** button: highlights line additions, modifications, and removals in a single pane.
- **Show Side-by-Side** button: highlights additions, modifications, and removals in two panes, with the older version of the file on the left, and the newer version on the right.
- **Show Whitespace** button: makes whitespace characters more visible; spaces show up as dots, tabs show up as arrows that point to a bar, and line endings show up as down-pointing arrows.
- **Ignore Whitespace** button: toggles the highlighting of whitespace changes in a file, making it easier to identify non-formatting changes. Normally, whitespace is not ignored.
- **Toggle Ignore Whitespace** button: toggles the highlighting of whitespace changes in the file diff.
 - **Highlight whitespace changes:** makes it easier to identify changes in file types where whitespace is important. This is the default value.
 - **Ignore whitespace changes:** whitespace changes are not highlighted, this makes it easier to see the important changes in file types where whitespace changes are not important.
- **Show all diffs** button (edited and integrated files only): toggles between displaying all the diffs for the file and only the first few. The limit of what are shown by default is configurable by the administrator (see [Max Diffs](#)) and defaults to 1500. If there are fewer than that then this button is hidden.
- **Show Full Context** button (edited and integrated files only): toggles between displaying only the portions of the file that have changed and the full file.
- **Open File** button (edited or integrated files only): opens a new browser tab/window display the full file (where possible), provide access to its history, and a button to download the file.
- **Mark file as read** button (displayed only for code reviews only): helps you (and others) keep track of which files have been reviewed. This is particularly useful when a code review consists of many files.

File diff view

- **Expand file** > button: click to expand the file to see what has changed, this displays the diff view for the file. Use the **File diff view** buttons to change how the diff is displayed:

When you view a diff, the changes are highlighted:

- Red indicates lines that have been removed.
- Blue indicates lines that have been modified.

- Green indicates lines that have been added.

Example side-by-side diff view:

<pre> 151 152 # Initialize variables 153 # 154 # "default =" - set only if unset 155 156 OSFULL = \$(OS)\$(OSPLAT)\$(OSVER) \$(OS)\$(OSPLAT) \$(OS) 157 158 # 159 # OS specific variable settings 160 # 161 162 switch \$(OS) 163 { 164 case AIX : LINKLIBS default = -lbsd ; 165 case DGUX : RANLIB default = "" ; RELOCATE = 166 case HPUX : RANLIB default = "" ; 167 INSTALL default = "" ; 168 case IRIX : RANLIB default = "" ; 169 INSTALL default = "" ; 170 case MVS : RANLIB default = "" ; RELOCATE = 171 case NEXT : AR default = libtool -o ; 172 RANLIB default = "" ; 173 case NCR : RANLIB default = "" ; 174 INSTALL default = "" ; 175 case PTX : RANLIB default = "" ; 176 case QNX : INSTALL default = "" ; 177 case SCO : RANLIB default = "" ; </pre>	<pre> 151 152 # Initialize variables 153 # 154 # "default =" - set only if unset 155 156 if \$(NT) { OS = NT ; } 157 158 OSFULL = \$(OS)\$(OSPLAT)\$(OSVER) \$(OS)\$(OSPLAT) \$(OS) 159 160 # 161 # OS specific variable settings 162 # 163 164 switch \$(OS) 165 { 166 case AIX : LINKLIBS default = -lbsd ; 167 case DGUX : RANLIB default = "" ; RELOCATE = 168 case IRIX : RANLIB default = "" ; 169 case HPUX : RANLIB default = "" ; 170 INSTALL default = "" ; 171 case MVS : RANLIB default = "" ; RELOCATE = 172 case NCR : RANLIB default = "" ; 173 INSTALL default = "" ; 174 case PTX : RANLIB default = "" ; 175 case QNX : INSTALL default = "" ; 176 case SCO : RANLIB default = "" ; </pre>
<pre> 210 CCFLAGS default = -nosyspath 211 C++ default = \$(CC) ; 212 C++FLAGS default = -nosyspath ; 213 FORTRAN default = "" ; 214 LIBDIR default = /boot/devel 215 LINK default = mwld ; 216 LINKFLAGS default = "" ; 217 LEX default = "" ; 218 MANDIR default = /boot/docum 219 NOARSCAN default = true ; 220 RANLIB default = "" ; 221 STDHDRS default = /boot/deve </pre>	<pre> 209 CCFLAGS default = -nosyspath 210 C++ default = \$(CC) ; 211 C++FLAGS default = -nosyspath ; 212 FORTRAN default = "" ; 213 LIBDIR default = /boot/devel 214 LINK default = \$(CC) ; 215 LEX default = "" ; 216 MANDIR default = /boot/docum 217 NOARSCAN default = true ; 218 RANLIB default = "" ; 219 STDHDRS default = /boot/deve </pre>






```

1884
1885     actions quietly updated piecemeal together RmTe
1886     {
1887         $(RM) $(>)
1888     }
1889
1890     actions Shell
1891     {
1892         copy $(>) $(<)
1893     }
1894 }
1895
1896
1897 #
1898 # Backwards compatibility with jam 1, where rules w
1899 #
1769
1770
1771 #
1772 # Backwards compatibility with jam 1, where rules w
1773 #

```

■ Show more context buttons:

Sometimes, the concise diff view needs to be expanded to fully understand the context of the change, use the **Show More** and **Show All** buttons to display extra lines around the change:

- **Show All Lines to Start of File**  button (only displayed for the first change in the file): click to show all of the lines up to the start of the file.
- **Show More Lines for the Code Below**  button: click to show 10 more lines above the change, the extra lines are displayed in the pane below the button.
- **Show Entire Section**  button: click to show all of the lines between the changes that are above and below the button, the two changes and the lines between them are displayed in a single pane.
- **Show More Lines for the Code Above**  button: click to show 10 more lines below the change, the extra lines are displayed in the pane above the button.
- **Show All Lines to End of File**  button (only displayed for the last change in the file): click to show all of the lines down to the end of the file.

Comments tab

The **Comments** tab is used to view all of the comments in the review.

📁 Files 1
💬 Comments 4
🕒 History
✉ Send All Notifications

4 archived comments

jack.boone commented 6 months ago (edited)
👍 📄 🗑

```
+ * Returns the client object for the given client.
+ */
+client_t * get_client( int id )
+{
+  int r_cx = rpc_connect(srvr);
```

👍 📄 🗑

claire.brevia (revision 1) (on client.cc, line 13) commented 4 months ago
 Don't we normally wrap the rpc_connect() call in a macro for sanity checking?

Reply · Edit · 1 ❤

steve.russell (revision 1) (on client.cc, line 13) replied 4 months ago
 We stopped doing that last release. It was a big performance hit.

Reply · 1 ❤

claire.brevia (revision 1) (on client.cc, line 13) replied 4 minutes ago
 Okay got it. Thanks

Reply · Edit · ❤

Add a comment










Drop files here to attach them Emoji codes are supported

Post
 Flag as Task
✉ Post and Notify (1)

Comment view

Comments are made up of the following elements (from left to right):

- **Commenter** avatar: the avatar of the user that made the comment, see "Avatars" on page 243.
- **Commenter** link: the username of the user that made the comment, click to see their user profile. For information about user profiles, see "Viewing another user's profile" on page 218.
- **Comment context** (only if the comment is made inline in a file): displays several lines of code before the line of code the comment is attached to. This helps makes sense of the comments should later changes remove those lines.

- **Revision** link (includes the file and line number if the comment is on a line in a file): click to go to the review revision the comment was made on. If the comment is made inline in a file the link will take you to that line in the file.
- **Mark comment as read**  button (unread comments only): click to mark a comment as read, the comment will only be marked as read for you. For more information on marking a comment as read, see ["Mark comments as read" on page 208](#).
- **Mark comment as unread**  button (read comments only): click to mark a comment as unread, the comment will only be marked as unread for you. For more information on marking a comment as unread, see ["Mark comments as unread" on page 209](#).
- **Archive**  button (only available for root level comments): click to archive a comment and any replies to that comment. For more information about archiving and restoring comments, see ["Archiving comments" on page 210](#) and ["Restore comments" on page 210](#).
- **Tasks:** Flagging review comments as tasks is a lightweight workflow within a review that helps authors and reviewers prioritize review feedback. Any comment on a review can be flagged as a task, indicating to the review's author that the described issue needs to be addressed, and that the review is unlikely to be approved without a fix. For information about working with tasks, see ["Tasks" on page 198](#).
 - **Not a Task**  button: the comment has not been flagged as a task. Click to flag the comment as a task.
 - **Flagged as a Task**  button: the comment has been flagged as a task. Click to confirm that the task has been addressed, or to remove the task flag from the comment.
 - **Task Addressed**  button: the comment task has been addressed. Click to verify that the task has been addressed correctly, to verify and archive the task, or to reopen the task if it has not been addressed correctly.
 - **Task Verified**  button: the comment task has been addressed and has been verified as correct. Click to reopen the task you think it has not been addressed correctly.
- **Comment** content: this can be text, a URL, or an attachment. For more information about the content of comments, see ["Comment features" on page 202](#).
- **Reply** link: click to reply to the comment. For information about replying to comments, see ["Reply to comments" on page 203](#).
- **Edit** link (only available for comments that you have made): click to edit the comment. For information about editing comments, see ["Editing comments" on page 197](#).
- **Like**  button (comments that you have not liked yet only): click to like the comment. The number to the left of the like button indicates how many users like the comment.
- **Unlike**  button (liked comments only): click to unlike the comment.

Add a comment

To add a comment, type your comment in the open comment text box at the bottom of the **Comments** tab page.

To reply to a comment, click the **Reply** button and type your comment in the comment text box.

- **Comment** text box: type your comment in the text box.
 - **URL links:** to add a URL link to a comment, type the URL into the comment text box. The URL is automatically made into a link. For information about how URL links are displayed in comments, see ["Links in comments" on page 205](#).
 - **Attachments:** to attach a file to a comment, drag the file and drop it on the comment text box. For more information about attachments, see ["Comment attachments" on page 205](#).
- **Flag as a Task** checkbox: select to flag the comment as a task. For more information about tasks, see ["Tasks" on page 198](#).
- **Post** button: click to post your comment. The comment is posted immediately but the comment notification is delayed, see ["Comment notification delay" on page 202](#).
- **Post and Notify (x)** link: click to manually post your comment and send the comment notification immediately.
Where **(X)** is the number of delayed comment notifications in the queue waiting to be sent, this number does not include the current comment you are working on.

History tab

The **History** tab presents a list of the events that affect this review.

The screenshot shows a navigation bar with three tabs: 'Files' with a count of 5, 'Comments' with a count of 0, and 'History' which is currently selected. Below the tabs is a list of four events, each with a circular profile picture, a name, and a description of the action. The events are: 1. paula.boyle updated description of review 135(revision 2) for jplugin:main, 42 minutes ago. 2. alex.randolph cleared their vote on review 135 (revision 2) for jplugin:main, about an hour ago. 3. alex.randolph updated description of review 135 for jplugin:main, 13 days ago. 4. alex.randolph updated description of review 135 for jplugin:main, 13 days ago. A vertical green bar is on the right side of the list.

Events include:

- When the review was started
- When a new reviewer joins the review
- When the review's state changes
- When the review's files are updated
- When a reviewer votes on the review

- When someone comments on the review, or one of its files
- When tests pass or fail, provided continuous integration is configured

Swarm user tasks

This section describes a number of the common Swarm user tasks:

Start a code review

To start a code review, choose one of the following approaches:

Important

If your Helix Server is configured as a commit-edge deployment, and your normal connection is to an edge server, Swarm refuses to start reviews for shelved changes that have not been promoted to the commit server.

Within Swarm, this means that the **Request Review** button does not appear for unpromoted shelved changes. Outside of Swarm, attempts to start reviews for unpromoted shelved changelists appear to do nothing. Ask your Helix Server administrator for assistance if you cannot start a review.

An administrator of the Helix Server can automatically promote shelved changes to the commit server by setting the configurable `dm.shelve.promote` to `1`.

- When you use Swarm to view a shelved or submitted changelist, click the **Request Review** button to request a review of that changelist.

Requesting a review on a shelved changelist uses the [pre-commit](#) model and requesting a review on a submitted changelist uses the [post-commit](#) model.

Note

To view a shelved or submitted changelist, use a [Quick URL](#). For example, if your change is `54321`, visit the URL: `https://myswarm.url/54321`

- When you are about to shelve or submit files:
 1. Include `#review` within your changelist (separated from other text with whitespace, or on a separate line).

Once the review begins, Swarm replaces `#review` with `#review-12345`, where `12345` is the review's identifier.

Note

The `#review` keyword is customizable. For details, see "Review keyword" on page 404.

2. At this time, you can add reviewers to the code review by using `@mention` for users, and `@@mention` for groups in the changelist description for each desired reviewer.

If your `@mention` or `@@mention` includes an asterisk (*) before the *userid* or *groupid*, for example `@*userid`, that user or all of the group members become required reviewers. If your `@@mention` includes an exclamation mark (!) before the *groupid*, for example `@@!groupid`, the members of that group become required reviewers but only one member of the group is required to vote. See "Required reviewers" on page 292 for details.
3. Complete your shelve or submit operation.

Warning

If you shelve a changelist and subsequently edit the description to include `#review`, a review is **not started**. You must re-shelve the files after adding `#review`.

Tip

You can also start a Swarm review with P4V, P4VS, and P4Eclipse. See below for details:

- **P4V**: see the [Swarm integration features](#) section of the *P4V User Guide*.
- **P4VS**: see the [Managing files](#) chapter of the *P4VS User Guide*.
- **P4Eclipse**: see the [Reviewing changes](#) chapter of the *P4Eclipse User Guide*.

- When you are using Git Fusion, you can start a review by pushing your changes to a target branch using the following command:

```
$ git push origin task1:review/master/new
```

task1 is the name of the current Git task branch, and **master** is the target branch that the proposed changes are intended for.

Important

The target branch must be mapped to a named Helix Server branch in the Git Fusion repo configuration.

See the [Converting a lightweight branch into a fully-populated branch](#) section of the *Git Fusion Guide* for details.

When the command completes, the output indicates the **review id** that has been created:

```
remote: Perforce: Swarm review assigned: review/master/1234
```

where **1234** is the review id that was just created.

For more information on Git Fusion, see the *Git Fusion Guide*.


Note

If you are using P4V and its Swarm integration, and you encounter the error **Host requires authentication**, ask your Helix Core Server administrator for assistance. See "P4V Authentication" on page 371 for details.

Once a review has started


Wait for someone else to review your code, or see "Contribute comments or code changes to a code review" on page 50. More review activities are available.

Check for code reviews you need to act on

Your dashboard is available by clicking the **Swarm Home**  icon on the left of the main toolbar. Your dashboard displays a list of reviews that you may need to act on.

Note

Since it is tied to the logged in user, the dashboard is only populated if you are logged in.

1. Click the **Swarm Home**  icon on the left of the main toolbar.
2. If the dashboard is not displayed, click the **Dashboard** tab.

The screenshot shows a dashboard interface with a navigation bar at the top containing 'REVIEWS', 'PROJECTS', 'FILES', 'COMMITTS', 'JOBS', 'GROUPS', and 'WORKFLOWS'. Below the navigation bar, there are tabs for 'Dashboard' (with a count of 9) and 'Activity'. The main heading is 'Reviews to act on', followed by a descriptive paragraph: 'Reviews you are participating in that need your vote, reviews that you authored that need changes, and reviews on branches where you're a moderator that you should approve or reject'. Below this are two filter dropdowns: 'All Projects' and 'All Roles', and a search bar with a 'Reset' button. The main content is a table with the following columns: Author, ID, Description, Project(s), Your role, State, and Last activity. The table contains five rows of review data.

Author	ID	Description	Project(s)	Your role	State	Last activity
	236	Need to be able to lookup a user id based on its username. Need to cope with the situatio . . .	mercury:main	Reviewer	1/0	8 days ago
	109	Test script test-16 for the new prototype. #review @@trriage		Required reviewer	0/0	about a month ago
	240	Adding in basic client api for getting client information.	mercury:dev	Reviewer	0/0	3 months ago
	243	Tweak to the test data for the new firmware.	test-data:data	Reviewer	0/0	3 months ago
	179	Adding basics.projects to documentation. #review @@ldocs		Reviewer	2/0	4 months ago
	105	Optimised some of the error checking to improve performance. #review @@trriage	mercury:main	Reviewer	0/0	7 months ago

3. By default all projects with reviews you need to act on are displayed.
4. To filter the reviews displayed by project, select **My Projects**, or a specific project from the **All Projects** drop down. The **All Projects** drop down will only show projects for which there are reviews in your dashboard.
5. By default all reviews you need to act on are displayed.
6. To filter by your role in a review, select **Author**, **Reviewer**, **Required reviewer**, or **Moderator** from the **All Roles** drop down. The **All Roles** drop down will only show roles for which there are reviews in your dashboard.

Tip

- For more information on the dashboard page, see "[Dashboard](#)" on page 171.
- Click on a review **ID** number to display the [code review](#).

List reviews you are involved with

1. Click the **Reviews** link in the main toolbar.

The screenshot shows the 'Reviews' page with the following details:

- Navigation bar: REVIEWS (selected), PROJECTS, FILES, COMMITS, JOBS, GROUPS, WORKFLOWS. Search bar and user profile 'allison.clayborne'.
- Section header: Reviews
- Filters: Opened (31), Closed (77)
- Toolbar: All Projects, All, filters, actions, search.
- Table of reviews:

ID	Description	Project	Created	Actions
234	Updating tests for test-19.txt,	test-data:data	26 days ago	Eye, Share, Edit, 0/0, 0/0
232	Updating tests for test-18.txt,	test-data:data	26 days ago	Eye, Share, Edit, 0/0, 0/0
230	Updating tests for test-17.txt,	test-data:data	26 days ago	Eye, Share, Edit, 0/0, 0/0

2. By default all projects are displayed.
3. To filter the reviews displayed by project, select **My Projects**, or a specific project from the **All Projects** drop down.
4. By default all reviews are displayed.
5. To filter by your role in a review, select **Reviews I've Authored**, **Reviews I'm Participating in**, **Reviews I've Authored or Am Participating in**, or search for reviews authored by a specific user from the **All** drop down.
6. Click the **Opened** tab to view open reviews, click the **Closed** tab to view closed reviews. See ["Reviews list" on page 256](#) for more information.

Contribute comments or code changes to a code review

Contribute to a code review by adding comments to the review, adding comments to specific lines within the review's files, or making edits to the review's files.

Commenting on a review

1. From the review page: click **Comments** to view the **Comments** tab.
2. Add your comment in the text area.
3. Click **Post**.

Commenting on a review description

1. From the review page description area: click **Add a Comment** or **X Comments** where **X** is the number of description comments that already exist.
2. Add your comment in the text area.
3. Click **Post**.

Tip

To hide the description comments, click **X Comments** (where **X** is the number of description comments that exist). To display the comments again, click **X Comments**.

Commenting on a specific line in a file

1. From the review page: click **Files** to view the **Files** tab.
2. Click on the line you want to comment on.
3. Add your comment in the text area.
4. Click **Post**.

Commenting on a file in a review

1. From the review page: click **Files** to view the **Files** tab.
2. If there are multiple files, click the file you want to comment on to expand its view.
3. Click the **Add a Comment** link in the footer of the file display.
4. Add your comment in the text area.
5. Click **Post**.

Editing files in a review

1. [Get a local copy](#) of the review's files.

Note

If you are using Git Fusion, follow the steps in the [next section](#).

2. Edit the files as required.

3. Prepare a changelist with the edited files and include `#review-1234` within the changelist's description (separated from other text with whitespace, or on a separate line), where `1234` is the review's identifier.

Warning

If you use an invalid review identifier, it will appear that nothing happens. Swarm is currently unable to notify you of this situation. If the review has not been correctly updated, use the **Add Change** button in the Swarm review heading to add the changelist to the review, see ["Add a changelist to a review" on page 284](#).

4. Depending on the [model of code review](#) you are using, you would:
 - Shelve the files (for pre-commit).
 - Submit the files (for post-commit).

Editing files in a review with Git Fusion

Important

You can only update Git Fusion-initiated reviews using Git Fusion.

In the following example, the current local task branch is `task1`, the target branch is `master`, the review id is `1234`, the Git Fusion hostname is `gfserver`, and the remote repo name is `p4gf_repo`.

1. Fetch the review's head version:

```
$ git fetch --prune origin
From gfserver:p4gf_repo
* [new_branch]      review/master/1234 ->
origin/review/master/1234
x [deleted]        (none)      -> origin/review/master/new
```

The `--prune` option lets the local Git repo delete the unwanted `review/master/new` reference created by the initial `git push origin task1:review/master/new` command.

2. Check out the review's head version:

```
$ git checkout review/master/1234
```

3. Edit the files as required.
4. Add the edited files to the index of files, in preparation for the next commit.

There are several ways to do this. For example, to add all modified files to the index, run:

```
$ git add -A
```


5. Commit the files in Git:

```
$ git commit -m "made some changes"
```

6. Push the Git changes to the review:

```
$ git push origin review/master/1234
```

Note

If you get review feedback that is better expressed as a Git rebase and cleaned up history, you can make your changes and push them as a new review.

You cannot clean up history and then push your changes to the same review.

For more information on Git Fusion, see the [Git Fusion Guide](#).

Get a local copy of a review's code for evaluation

Swarm manages one or more changelists containing shelved copies of all of the files belonging to a specific review. You can unshelve the files to receive a copy of the review's code, or you can click the [Download .zip](#) button on the review to download a ZIP archive containing all of the review's files.

Determine the changelist containing the review's files

1. Visit the review's page.
2. The current review version's changelist appears in the file list heading.

```
#3: Change 697707 shelved into //depot/main/swarm
```

In this example, the changelist is 697707. You use the identified changelist in place of shelved changelist below.

Note

Swarm can version file updates in reviews. For more information, see "Review display" on page 262.

Using P4

For a shelved changelist, use a command-line shell and type:

```
$ p4 unshelve -s shelved changelist
```

For a committed changelist, use a command-line shell and type:

```
$ p4 sync @committed changelist
```

Note

Your client's view mappings need to include the changelist's path.

Using P4V

For a shelved changelist:

1. Select **Search > Go To**.
2. Change the select box to **Pending Changelist**.
3. Type in the shelved changelist number and click **OK**.
4. Select the files in the **Shelved Files** area.
5. Right-click and select **Unshelve**.
6. Click **Unshelve**.

For a committed changelist:

1. Select **Search > Go To**.
2. Change the select box to **Submitted Changelist**.
3. Type in the submitted changelist number and click **OK**.
4. Select the files in the **Files** area.
5. Right-click and select **Get this Revision**.
6. Click **Close**.

Using Git Fusion

Git Fusion-initiated reviews include the Git logo beside the main review identifier. This indicator is important because Perforce users cannot update Git Fusion-initiated reviews.

Review 773273

In the following example, the current local task branch is `task1`, the target branch is `master`, the review id is `773273`, the Git Fusion hostname is `gfserver`, and the remote repo name is `p4gf_repo`.

1. Fetch the review's head version:

```
$ git fetch --prune origin
From gfserver:p4gf_repo
* [new_branch]          review/master/773273 ->
```

```
origin/review/master/773273
x [deleted]          (none)      -> origin/review/dev/new
```

The `--prune` option lets the local Git repo delete the unwanted `review/master/new` reference created by the initial `git push origin task1:review/master/new` command.

2. Check out the review's head version:

```
$ git checkout review/master/773273
```

Important

You can only update Git Fusion-initiated reviews using Git Fusion.

For more information on Git Fusion, see the [Git Fusion Guide](#).

Download files as a ZIP archive

The **Download .zip** button is used to download a ZIP archive that contains all of the files in the review. The version of the files downloaded is the most recent review revision selected in the review revision selector, see "Select review revisions to view" on page 273.

Important

Files **Marked for Add** in pre-commit reviews and shelved changelists are not included in the zip file.

Note

The **Download .zip** button is not displayed if the zip command-line tool is not installed on the Swarm server. For information about installing, and configuring the zip command-line tool, see "Zip archive" on page 359.

When you click the **Download .zip** button, Swarm performs the following steps:

1. Scans the files/folders:
 - Checks that you have permission to access their contents, according to the Helix Core Server protections.
 - Checks that the total file size is small enough to be processed by Swarm.
2. Syncs the file contents to the Swarm server from the Helix Core Server.
3. Creates the ZIP archive by compressing the file content.
4. Starts a download of the generated ZIP archive.

Note

- You might not see all of the above steps; Swarm caches the resulting ZIP archives so that

repeated requests to the same files/folders can skip the sync and compress steps whenever possible.

- If an error occurs while scanning, syncing, or compressing, Swarm indicates the error.

Fix 'not mergeable' errors in a review

The problem can occur when you attempt to **Commit** or **Approve and Commit** via the Swarm UI and the shelved files are out of date.

Helix Swarm cannot currently help with resolving conflicts; you need to use a Helix Server client such as p4 or P4V to resolve conflicts.

Resolve via P4

1. Acquire a [local copy](#) of the files.
2. Sync the files to the head version:

```
$ p4 sync
```

3. Begin resolving files with:

```
$ p4 resolve
```

4. Choose an appropriate option to resolve each file. For example:

```
$ p4 resolve
/home/bruno/bruno_ws/dev/main/jam/command.c - merging
//depot/dev/main/jam/command.c#9
Diff chunks: 4 yours + 2 theirs + 1 both + 1 conflicting
Accept(a) Edit(e) Diff(d) Merge (m) Skip(s) Help(?) e:
```

5. Re-shelve the resolved files with:

```
$ p4 shelve
```

Note

Ensure that the changelist description contains `#review-12345` (separated from other text by whitespace, or on a separate line), where `12345` is the identifier of the review you are updating.

Warning

If you use an invalid review identifier, it will appear that nothing happens. Swarm is currently unable to notify you of this situation. If the review has not been correctly updated, use the **Add Change** button in the Swarm review heading to add the changelist to the review, see ["Add a changelist to a review" on page 284](#).

For more information, see "Resolve" in the *Helix Core Server User Guide*.

Resolve via P4V

1. Acquire a [local copy](#) of the files.
2. In P4V, right-click your workspace folder and select **Resolve Files**.

The **Resolve** dialog appears.

3. Choose the appropriate options to resolve each file.
4. Right-click your workspace folder and select **Shelve Files**.

The **Shelve** dialog appears.

Note

Ensure that the changelist description contains `#review-12345` (separated from other text with whitespace, or on a separate line), where `12345` is the identifier of the review you are updating.

Warning

If you use an invalid review identifier, it will appear that nothing happens. Swarm is currently unable to notify you of this situation. If the review has not been correctly updated, use the **Add Change** button in the Swarm review heading to add the changelist to the review, see ["Add a changelist to a review" on page 284](#).

5. Click **Shelve**.

For more information, see "Resolving Files" in the *P4V User Guide*.

View a list of Git-created reviews

You can view all reviews that were initiated in Git. First, you need to fetch any review branches that may exist:

```
$ git fetch --prune origin
```

Then you can list all branches, which includes any review branches, for the current Git Fusion repo:

```
$ git branch -a
task1
* master
remotes/origin/task1
remotes/origin/master
remotes/origin/review/task1/1234
remotes/origin/review/task1/1244
remotes/origin/review/task1/1347
remotes/origin/review/master/1235
remotes/origin/review/master/1236
remotes/origin/review/master/1358
```

Note

Git users cannot see Swarm reviews initiated in Helix Server.

For more information on Git Fusion, see the [Git Fusion Guide](#).

Change the author of a review

If the author of a review is no longer available, or ownership of a review is passed to a different developer, it is useful to be able to change the author of that review.


Note


By default you cannot change the author of a review, this option must be enabled by your Swarm administrator. See "Allow author change" on page 414 for details.


Tip

If you already have the review open in Swarm you can skip to [step 5](#).


1. Click the **Reviews** link in the main toolbar.
2. Click the **User** drop down and search for reviews by the author you want to replace. The list will auto-complete with users as you type.

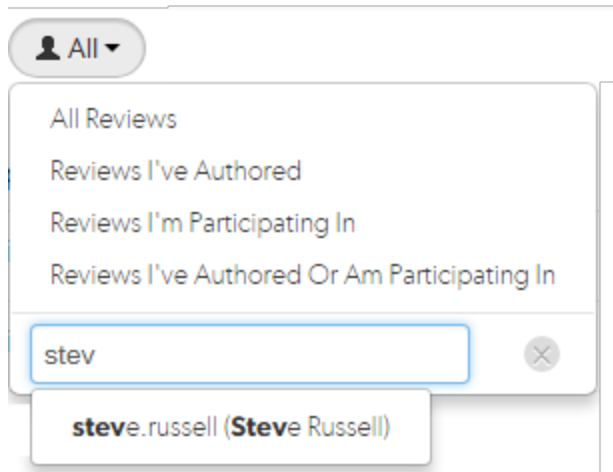

3. Select the author from the list, reviews by that author are displayed.
4. Click the **ID** of the review you want to change the author on.
5. Click the Author edit icon  and search for the new author name. The list will auto-complete with users as you type.




6. Select the new author name and click **Save**.

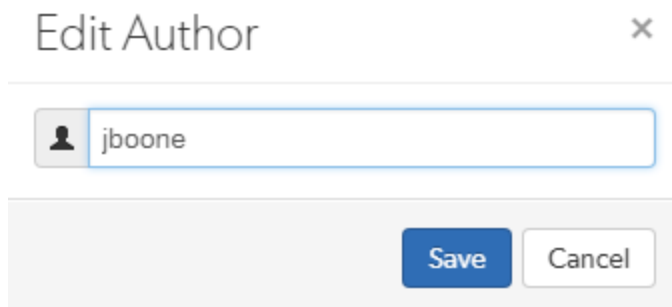

7. The review will display the new author's avatar in the author area of the review page.

Change your user notification settings

1. Click on your *userid* at the top-right of the main toolbar and select **Profile**.

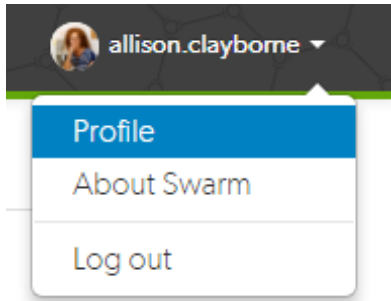

2. Click the **Notifications** tab to display your user notifications settings.
3. Configure which notifications you receive when events occur within Swarm, see the "[Notifications tab](#)" on page 216.


Unfollow all projects and users you are following

When you are viewing your own user profile, you can unfollow all projects and users that you are following.

Note

This action cannot be undone.

1. Display your own user profile when you are logged into Swarm by clicking on your *userid* at the top-right of the main toolbar and selecting **Profile**.

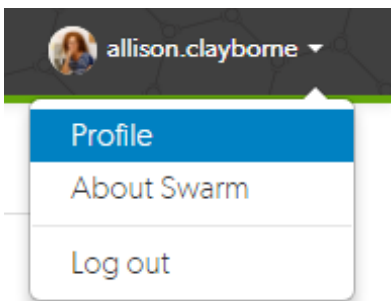

Your user page is displayed:

2. Click the **Unfollow all projects and users for *your-username*** button.
3. Click **OK** when the confirmation dialog is displayed to complete the unfollow action.
4. You will no longer be following any projects or users.

Swarm administration tasks

This section describes a number of the common Swarm administration tasks:

Change notification settings for a group

Important

You must be an owner of the group, have *super* privileges in Helix Server (**p4d**), or have *admin* privileges in **p4d** version 2012.1 or later, to edit group notifications. If you do not have sufficient permissions, Swarm does not display the **Notifications** tab for the group.

1. Click the **Groups** link in the main toolbar.
2. Click the group you want to edit.
3. Click the group **Notifications** tab.
 - If **Group mailing list** is **Disabled**, emails are sent to the group members individual email addresses and only the following notification options are available:

- **Email members when a review is requested:** When any member of this group creates a review, this group will be notified.
- **Email members when a change is committed:** When a change is committed into Perforce, if the owner of the changelist is a member of this group, this group will be notified.

Tip

When a user commits a changelist in Swarm, it is committed on behalf of the changelist owner. If the changelist owner is a member of this group, this group will be notified.

- If **Group mailing list** is **Enabled** notifications are sent to the group email address and additional notifications are available for the group, see [group notifications](#) for details.

Manage project branches

Initial steps:

1. Visit your project page.
2. Click **Edit**.

Next to the **Branches** label, a drop-down button for each branch is displayed, and **+ Add Branch**.

Branches

Design	▼
Main	▼

[+ Add Branch](#)

Adding a branch

1. Follow the [initial steps](#).
2. Click + **Add Branch** to display the branch drop-down dialog.

Name

Branch Name

Workflow

Inherit from project

Paths

//depot/path/to/branch/...

Default Reviewers

Add a Default Reviewer

Minimum up votes

Inherit from project

Retain default reviewers for reviews associated with this branch

Only Moderators can approve or reject reviews

Done Remove

3. Enter a short **Name** for your branch.

4. **Optional** (only displayed if the Workflow feature is enabled): associate a workflow with the project branch.

To use the parent project workflow, select **Inherit from project** from the **Workflow** dropdown list. This is the default when you create a new branch.

To associate a workflow, select the workflow from the **Workflow** dropdown list, or enter the workflow name in the search field. The field auto-suggests workflows as you type. Only workflows that you own, and shared workflows are shown in the dropdown list.

Tip

- When a workflow is associated with a project, the workflow is used for all of the branches in that project.
- When a project branch is associated with a workflow, the workflow of the parent project is ignored and the branch workflow is used.

For more information about workflows and how project workflows interact with branch workflows, see ["Workflow basics" on page 341](#).

5. Enter one or more branch paths in the **Paths** field using depot syntax, one path per line.

Tip

- Branch paths, and files can be excluded by putting a minus symbol – at the start of the path.
- Branch paths are processed in order, starting with the first file path in the list.

For example:

```
//depot/main/swarm/...  
-//depot/main/swarm/test/...  
//depot/main/swarm/test/ResultSummary.html
```

The first path includes all of the directories and files under `//depot/main/swarm/` in the project branch.

The second path excludes all of the files in `-//depot/main/swarm/test/` from the project branch.

The third path includes the `ResultSummary.html` file from the previously excluded `//depot/main/swarm/test/` directory.

Note

- Wildcards should not be used; the only exception is that the branch path can end with the Helix Server wildcard `...`
- Branch paths are case sensitive.
- Branch paths, and files are not checked to see if they are valid when you save the branch:
 - If you enter an invalid path ending in the wildcard `...`, the path will not be displayed in the [project file browser](#) until the path is created. This allows you to specify a path before it has been created.
 - If you enter a path that ends with a file that has not been committed, or a non-existent file, Swarm displays a 404 error when you navigate the path to the file with the [project file browser](#).

Note

The [Project Commits tab](#) can fail to show some Helix Server commits in the top level view. Individual branch views display the commits correctly:

The **Project Commits** tab top level client view is made up of all of the branches of the project.

For example, Project Alpha:

Branch: QA:
`//depot/alpha/dev/QA/...`

Branch: Dev:
`//depot/alpha/dev/...`
`-//depot/alpha/dev/QA/...`

The project commits tab view is generated by processing the branches in the order that they were created in and from top to bottom for the paths in each of those branches.

For the project Alpha example above:

The first path includes all of the directories and files under `//depot/alpha/dev/QA/` in the project commits tab top level view.
The second path includes all of the directories and files under `//depot/alpha/dev/` in the project commits tab top level view.
The third path excludes all of the directories and files in `//depot/alpha/dev/QA/` from the project commits tab top level view.

Result: commits made to `//depot/alpha/dev/QA/` that should be shown for the **QA** branch are not displayed in the **Project Commits** tab top level view.

When you have a simple branch structure this can be avoided by considering this issue when you create your branches. In the example above, creating the **Dev** branch first and then creating the **QA** branch avoids the problem because `//depot/alpha/dev/QA/` is not excluded from the **Project Commits** tab top level view.

6. Default reviewers:

- a. **Optional:** specify **Default Reviewers** for the project branch.

This field auto-suggests users, and groups within Helix Server as you type (up to a combined limit of 20 entries). Click on the user or group to add them as a default reviewer. Each time a new review is created, the default reviewers will be added to the review.

- **Users:** click the star icon to the left of the *userid* to toggle whether their vote is required or not. A solid star means that their vote is **required** to approve a review, whereas the outlined star means that their vote is optional.
- **Groups:** click the star icon to the left of the *groupid* , and select whether the group is a **required reviewer (one vote)**, a **required reviewer (all votes)**, or an optional reviewer. A solid star means that all group member votes are required to approve a review, a solid star with a 1 inside means at least one group member must vote up and no group members vote down to approve a review, and the outlined star means that the group vote is optional.

Click the **X** icon to the right of the *userid* or *groupid* to remove that default reviewer from the default reviewers list.

Important

When a review is part of multiple projects/project branches:

- The default reviewer lists for all of the projects and project branches the review is part of are combined and added to the review.
- If a default reviewer has different reviewer options set on projects and project branches that the review is part of, the strictest reviewer option is used for the review.

Example: A review is created and it is part of **Project A**, **Project B**, and **Project Branch b**.

Project A: default reviewer X is an Optional reviewer

Project B: default reviewer X is an Optional reviewer

Project Branch b: default reviewer X is a Required reviewer

Result: default reviewer X is added to the review as a Required reviewer

Note

If users or groups are **@mentioned** in a new changelist description that includes **#review**, they will be added to the review as reviewers. If any of these reviewers are already specified as default reviewers they will not be added to the review again, the reviewer's most restrictive reviewer option is used for the review.

Note

If a default reviewer is deleted from Helix Server they will not be added to new reviews.

- b. **Optional:** click the **Retain default reviewers for reviews associated with this branch** checkbox to prevent default reviewers being removed from reviews associated with this branch.

For more information about retained default reviewers, see [Retain default reviewers](#).

7. **Optional:** set the **Minimum up votes** required for reviews associated with this branch.

To inherit the parent project setting, leave **Minimum up votes** set to **Inherit from project**. This is the default when you create a new branch.

To use the branch setting and ignore the parent project setting, set **Minimum up votes** to **1** or more on the branch.

A review cannot be approved until all of the [Required reviewers](#) have voted up the review and the **Minimum up votes** specified has been satisfied.

- If a review spans projects/branches, the Minimum up votes for **each** of the projects and branches must be satisfied before you can approve the review.
- Required reviewers are included when up votes are counted.
- When **Count votes up from** is set for a workflow associated with a project/branch, only the up votes of members of the project contribute to satisfying the **Minimum up votes** for a project/branch. For more information about the **Count votes up from** rule, see "[Workflow rules](#)" on page 339.

Important

If the Workflow technology preview feature is disabled (default), all votes are counted not just votes from project members.

Important

If the **Minimum up votes** required is set higher than the number of reviewers that exist for a review, approval will be blocked for that review. This is true even if all the reviewers on the review have voted up the review.

8. **Optional:** check the **Only Moderators can approve or reject reviews** checkbox.

When checked, a field is displayed, allowing you to add a new moderator. The field auto-suggests groups and users within the Helix Core Server as you type.

If a group is specified as a moderator, all of the members of that group have the same moderator privileges for that project branch as if they were added individually.

Once the branch specification is complete and the project has been saved, changing the state of any review associated with this moderated branch is restricted as follows:

- Only moderators can approve or reject the review. Moderators can also transition a review to any other state.

Important

Moderators prevent the automatic approval of reviews. **Workflow is disabled by default:** for more information about automatically approving reviews using workflow rules, see "[Workflow rules](#)" on page 339.

Note

By default, when a review spans multiple branches that have different moderators, only one moderator from any one of the branches needs to approve the review.

Swarm can be configured to require that one moderator from each branch must approve the review, this is a global setting. If a moderator belongs to more than one of the branches spanned by the review, their approval will count for each of the branches they belong to. For instructions on how to configure moderator behavior, see "[Moderator behavior when a review spans multiple branches](#)" on page 411.

- The review's author, when not a moderator, can change the review's state to **Needs Review**, **Needs Revision**, **Archived**, and can attach committed changelists.

Normally, the review's author cannot change the review's state to **Approved** or **Rejected** on moderated branches. However, authors that are also moderators have moderator privileges, and may approve or reject their own review.

When `disable_self_approve` is enabled, authors who are moderators (or even users with admin privileges) cannot approve their own reviews.

- Project members can change the review's state to **Needs Review** or **Needs Revision**, and can attach committed changelists. Project members cannot change the review's state to **Approved**, **Rejected**, or **Archived**.
- Users that are not project members, moderators, or the review's author cannot transition the review's state.

- For the review's author and project members, if a review is not in one of their permitted states, for example if the review's state is **Rejected**, they cannot transition the review to another state.

These restrictions have no effect on who can start a review.

9. Click **Done** to accept your branch specification.

Once the branch definition has completed, if any moderators were specified, the number of moderators for that branch is displayed in the list of branches.

10. Click **Save** to save the branch changes to your project.

Note

The project name does not need to be included in the branch name; Swarm displays the project name with the branch name when appropriate.

Editing a branch

1. Follow the [initial steps](#).
2. Click the branch drop-down button you want to edit.
3. Revise the **Name**, **Paths**, default reviewers, or moderators as required.
4. Click **Save**.

Removing a branch

1. Follow the [initial steps](#).
2. Click the branch drop-down button you want to remove.
3. Click **Remove**.
4. Click **Save**.

Unfollow all projects and users for another user

Note


You must be logged in as a user with *admin* or *super* user privileges and viewing the user's profile page to perform this action.

When a user has been removed from the Helix Server but they are still following projects and users, it is useful to be able to remove all of their follows. This helps to keep the project and user follower lists up to date.

Note

This action cannot be undone.

1. Use the **Search** box in the main toolbar to search for the user, the search field will auto-complete as you type.

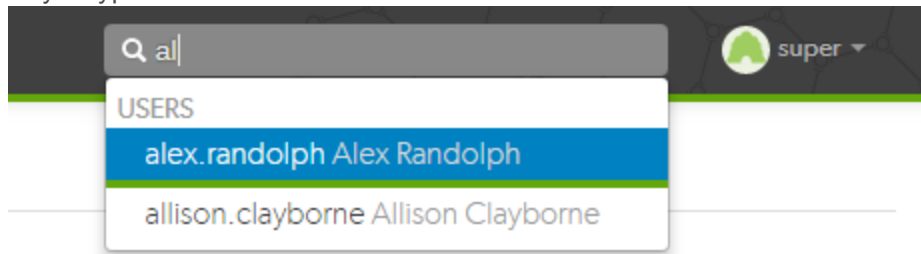

2. Select the user from the search results to display the user's profile:

A screenshot of a user profile page for 'alex.randolph'. The profile includes a circular profile picture, a 'Follow' button, and statistics: 0 FOLLOWERS, 1 FOLLOWING, and 2 PROJECTS. Below the statistics, the full name 'Alex Randolph' and email address 'alex.randolph@nowhere.xjzzj.com' are listed. A red button labeled 'Unfollow all Projects and Users for alex.randolph' is visible. To the right, the 'Activity' tab is selected, showing a list of recent actions with timestamps and comment counts. The activity items include: 'alex.randolph commented on review 240 (client.cc, line 5) for mercury:dev I agree with @claire.brevia' (5 days ago, 7 comments), 'alex.randolph edited a comment on review 113 (test-17.txt, line 2) Thanks, can you have this done by the end of the day?' (12 days ago, 6 comments), 'alex.randolph commented on review 113 (test-17.txt, line 2) @steve.russell Thanks, can you have this done by the end of the day?' (13 days ago, 6 comments), 'alex.randolph made their vote required on review 236 for mercury:main Need to be able to lookup a user id based on its username.' (2 months ago), and 'alex.randolph cleared their vote on review 236 for mercury:main Need to be able to lookup a user id based on its username.' (2 months ago). A vertical red bar is on the right side of the activity list.

3. Click the **Unfollow all projects and users for username** button located below the user's email address.
4. Click **OK** when the confirmation dialog is displayed to complete the unfollow action.
5. The user will no longer be following any projects or users.

Obliterate a review

Note

- By default, you must be a user with *admin* or *super* user rights to obliterate a review.
- **Optional:** Swarm can be configured to allow users to obliterate reviews that they have authored. Configured by your Swarm administrator, see "[Allow author obliterate review](#)" on [page 414](#).

Obliterate is used to permanently delete reviews that have been created by mistake. For instance, if a review is associated with the wrong changelist, or a review contains sensitive information that should not be openly available.


For information on what happens to a review when it is obliterated, see "[When you obliterate a review](#)" on [page 417](#).

Important

Obliterate must be used with care, the review and all of its associated metadata are permanently deleted. An obliterated review cannot be reinstated, not even by Perforce Support.

To obliterate a review:

1. Navigate to the review.
2. Click the **Review state** button and select **Obliterate Review**.

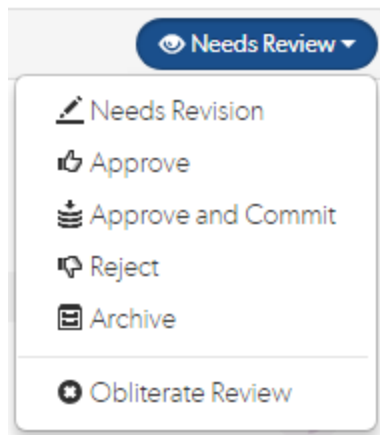

3. Click **Yes** on the confirmation dialog to complete the obliterate action.
4. The review is obliterated.

Change the logging level

Swarm logs various activities to the data/log file. Change the logging level to increase or decrease the volume of log data by editing a configuration file.

An example configuration, in the `SWARM_ROOT/data/config.php` file:

```
<?php
    // this block should be a peer of 'p4'
    'log' => array(
        'priority' => 3, // 7 for max, defaults to 3
    ),
```

The maximum value for the log priority is 7; higher values do not result in increased logging. The minimum value is 0, which means no logging; lower values do not result in further logging reductions. For more information, see ["Logging" on page 389](#).

Check the queue workers

Helix Swarm uses a custom queue system to process events, provide notifications, and more. The queue system is required to handle the potentially large volume of events from a busy Helix Server.

Check the status of the queue by making an HTTP request to `/queue/status`. The response is formatted in JSON and looks like this:

```
{"tasks":0,"futureTasks":1,"workers":3,"maxWorkers":3,"workerLifetime":"595s"}
```

This response indicates that the queue has no current tasks, there is 1 task scheduled for processing later, there are 3 queue workers available, at most 3 workers are created, and queue workers run for at most 10 minutes before self-terminating.

A queue manager ensures that sufficient queue workers are available to process items. If the queue manager has stopped for some reason, start a new one by making an HTTP request to `/queue/worker`. No response is provided for this request.

Note

A cron job should be setup to ensure that workers are running to process events. See ["Set up a recurring task to spawn workers" on page 143](#).

Integrate your test suite to inform review acceptance or rejection

Integrating Helix Swarm with a test suite involves enabling **Automated Tests** in your project's configuration and providing a *trigger URL*. When the *trigger URL* is requested, Swarm expects your test suite to be executed. When the tests complete, Swarm expects either a *pass callback URL* or *fail callback URL* to be requested by your test suite.

Note

If your automated tests fail to run after you have configured them, check that they have not been globally disabled by your Swarm administrator. See ["Disable tests on approve and commit" on page 416](#) for details.

1. Navigate to the project page.
2. Click the project **Settings** tab to display the **Project Settings** page.
3. Ensure that paths in each named branch configured for the project do not overlap with paths in other named branches.
4. **Automated tests** checkbox: select **Enable** to display the configuration fields:

Automated Tests Enable

`http://test-server/build?change={change}`

A URL that will trigger automated tests to run when reviews are created or updated.

Some special [arguments](#) are supported. [See help for more details.](#)

POST Body

`foo=bar&baz=buzz`

URL Encoded ▼

Optional data to POST to the above URL. The special arguments supported for URLs can also be used here.

5. Provide a URL that triggers your test suite execution.

Special arguments are available to inform your test suite of various details from Swarm:

{change}	The change number
{status}	Status of the shelved change, <i>shelved</i> or <i>committed</i>
{review}	The review's identifier
{project}	The project's identifier
{projectName}	The project's name
{branch}	The branch identifier(s) impacted by the review, comma-separated
{branchName}	The branch name(s) impacted by the review, comma-separated
{pass}	Tests pass callback URL
{fail}	Tests fail callback URL

Note

The **{pass}** and **{fail}** are composed automatically by Swarm, and include Swarm's own per-review authentication tokens.

6. **Optional:** specify any parameters that your automated tests require that must be sent via HTTP POST in the **POST Body** field. The POST parameters can include the special arguments listed above.

Select the format of the POST parameters, either **URL Encoded** or **JSON Encoded**.

- **URL Encoded:** POST parameters are parsed into name=value pairs.
- **JSON Encoded:** parameters are passed raw in the POST body.

Configuring Jenkins for Swarm integration

Important

Your Jenkins host needs to be able to communicate with the Swarm host, and vice versa. Ensure that the appropriate DNS/host configuration is in place, and that each server can reach the other via HTTP/HTTPS.

1. Install the p4-plugin in Jenkins:

<https://wiki.jenkins-ci.org/display/JENKINS/P4+Plugin>

2. Configure a Jenkins project:
 - a. Specify the job name so that it matches the project identifier used in the trigger URL, as defined [below](#).

For example, the computed value of `{projectName}_{branchName}`.

Or, edit the trigger URL to use the Jenkins job name you specify.

- b. Make the build parameterized to accept these parameters (note that these are named to match up with the script that is called):

{status}

Whether the changelist to be tested is shelved or submitted

{change}

Changelist # to run tests against

{review}

The review's identifier

{pass}

The URL to wget if the build succeeds

{fail}

The URL to wget if the build fails

- c. Select **Perforce Software** for the **Source Code Management** section.

Important

You may see **Perforce** in the **Source Code Management** section. This represents an earlier community-provided Perforce plugin that does not include support for Swarm.

- d. Set up credentials and workspace behavior as needed.

See the [Credentials](#) and [Workspaces](#) sections of the [p4-plugin documentation](#) for details.

Important

- If your Helix Server is configured for multi-factor authentication, the service user credentials used for automated testing must not use MFA.
- The client workspace configured in Jenkins must have a view that includes the paths defined for that branch in Swarm.

3. Configure your Swarm project to run automated tests with a URL like this:

```
http://jenkins_host:8080/job/{projectName}_  
{branchName}/review/build?status={status}&review={review}&change=  
{change}&pass={pass}&fail={fail}
```

Important

For Jenkins, the job name needs to match the job identifier in the URL. In the example above, this is the computed value of **{projectName}_{branchName}**.

If you prefer a different naming scheme in Jenkins, replace **{projectName}_{branchName}** in the URL above with the project name actually defined in Jenkins.

Note

If your build script has access to the results of test execution, include a GET or POST parameter called url when calling the pass or fail URLs. Swarm uses the provided url to link reviews to the test results.

Important

If security is enabled in Jenkins, the trigger URL needs to include credentials. Follow these steps:

- a. Create a Jenkins user that will trigger Swarm builds. For example swarm.
- b. Log into Jenkins as the new user.
- c. Click on the user's username in the Jenkins toolbar.
- d. Scroll down to **API Token**.
- e. Click **Show API Token**.
- f. Incorporate the value of the **API Token** into the Swarm trigger URL.

For example, if the username is swarm and the API Token value is 832a5db7e5500c1288324c1441460610, the Swarm trigger URL should be:

```
http://swarm:832a5db7e5500c1288324c1441460610@jenkins_  
host:8080/job/{projectName}_  
{branchName}/review/build?cause=Automated%20test%20triggered%2  
0for%20Swarm%20project%20{projectName},%20branch%20  
{branchName},%20review%20{review}&status={status}&review=  
{review}&change={change}&pass={pass}&fail={fail}
```

Automatically deploy code within a review

Deploying code in a code review automatically involves enabling **Automated Deployment** in your project's configuration and providing a *trigger URL*. When the *trigger URL* is requested, Swarm expects a deployment program to be executed.

When the deployment processing ends, Swarm expects either a *success callback URL* or *failure callback URL* to be requested by your deployment program. These callback URLs should include a url parameter (either via GET or POST); when a valid-looking URL is included, clicking the deployment status indicator directs the user to the specified URL. This is intended to facilitate easy viewing of the successfully deployed review, or a report indicating why the deployment failed. The url parameter is mandatory for successful deployments, but is optional for failures.

1. Navigate to the project page.
2. Click the project **Settings** tab to display the **Project Settings** page.
3. **Automated Deployment** checkbox: select **Enable** to display the configuration field:

Automated Deployment Enable

`http://deploy-server/deploy?change={change}`

A URL that will trigger a deployment when reviews are created or updated. Some special [arguments](#) are supported. [See help for more details.](#)

4. Provide a URL that triggers your deployment execution.

Special arguments are available to inform your deployment program of various details from Swarm:

{change}

The change number

{status}

Status of the shelved change, shelved or committed

{review}

The review's identifier

{project}

The project's identifier

{projectName}

The project's name

{branch}

The branch identifier(s), comma-separated

{branchName}

The branch name(s), comma-separated

{success}

Deployment successful callback URLd

{fail}

Deployment failure callback URL

4 | Install and upgrade Swarm

This chapter covers the initial installation and configuration of Swarm as well as upgrading an existing Swarm installation.

Important restrictions

Do not prefix group names, project names, user names, or client-names with "swarm-", this is a reserved term used by Swarm. Prefixing a name with "swarm-" will result in unexpected and unwanted behavior in Swarm.

For example:

Prefixing a group name with "swarm-project-" will result in, but is not limited to, the following issues:

- Swarm notifications will not be processed correctly for the group.
- The group will not be visible in Swarm.

Review the runtime dependencies

First, review the runtime dependencies before you install Swarm, see ["Runtime dependencies" on page 81](#).

Choose the installation process

Once you have reviewed the ["Runtime dependencies" on page 81](#) and know that you can satisfy them, there are a number of ways to install Swarm.

Tip

Installing Swarm using ["Install and configure Swarm from a package" on page 91](#) ensures that all of the Swarm dependencies are installed and is the easiest way to install Swarm.

Choose one of the following installation processes:

- **Swarm packages (RPM or Debian):**
 1. Follow the steps provided in ["Install and configure Swarm from a package" on page 91](#).
 2. Configure the Swarm triggers on the Helix Server, see ["Helix Core Server configuration for Swarm" on page 127](#).
 3. Review the post-install configuration options to customize your Swarm installation, see ["Post-install configuration options" on page 148](#).

4. You are now all set to start using Swarm. Enjoy!

Tip

To get started with Swarm, see the ["Quickstart" on page 24](#) chapter.

■ **Swarm.ova (Open Virtualization Appliance):**

1. Follow the steps provided in ["Deploy and configure a Swarm VM from an OVA" on page 107](#).
2. Configure the Swarm triggers on the Helix Server, see ["Helix Core Server configuration for Swarm" on page 127](#).
3. Review the post-install configuration options to customize your Swarm installation, see ["Post-install configuration options" on page 148](#).
4. You are now all set to start using Swarm. Enjoy!

Tip

To get started with Swarm, see the ["Quickstart" on page 24](#) chapter.

■ **Swarm.tgz (Tarball):**

1. Follow steps provided in the ["Install and configure Swarm manually from a Tarball" on page 113](#).
2. Configure Apache, see ["Apache configuration" on page 114](#).
3. Configure PHP, see ["PHP configuration" on page 119](#).
4. Configure Swarm, see ["Swarm configuration" on page 124](#).
5. Establish a trigger token, see ["Establish trigger token" on page 127](#).
6. Configure the Swarm triggers on the Helix Server, see ["Helix Core Server configuration for Swarm" on page 127](#).
7. Set up a recurring task to spawn workers, see ["Set up a recurring task to spawn workers" on page 143](#).
8. Review the post-install configuration options to customize your Swarm installation, see ["Post-install configuration options" on page 148](#).
9. You are now all set to start using Swarm. Enjoy!

Tip

To get started with Swarm, see the ["Quickstart" on page 24](#) chapter.

Upgrade Swarm

If you already have a working Swarm installation and you want to upgrade Swarm to a newer release, see "Upgrading Swarm" on page 160.

Runtime dependencies

In order to successfully install, configure, and deploy Swarm, the following dependencies are required:

- A "Supported operating system platforms" on the next page
- An "Apache web server" on the next page with `mod_rewrite` and `mod_php x` (where x is the version of PHP you are running, for example 5 or 7). For supported versions of PHP, see "PHP" on page 83.
- A supported version of "PHP" on page 83 with the following extensions:
 - iconv
 - JSON
 - Session
 - P4PHP
 - one of APC or Zend OPcache (for optimal performance)
 - php-mbstring (for multi-byte character strings)

In addition, Swarm greatly benefits from the following optional extensions:

- Imagick (used for viewing non-web safe images)
- php-xml (for RSS feeds)
- A supported Helix Core Server deployment, and the ability to connect to it from the system hosting Swarm.

Note

"Helix Server deployment" can refer to a running `p4d` or a proxy, replica, edge server, or commit server.

- `curl` or `wget` (for Swarm worker operation)
- A supported version of `perl` (to integrate with Helix Core Server triggers)
- That "Security-enhanced Linux (SELinux)" on page 88, if installed, is configured

Optional dependencies:

- **LibreOffice:** Required to view office-type documents. For more information, see "[Optional dependencies](#)" on page 88.
- **zip** command-line archiving tool: Required to download zip archives of files and folders. For more information, see "[Optional dependencies](#)" on page 88.

Supported operating system platforms

Because Swarm includes binary versions of P4PHP (the Perforce extension for PHP), we support Swarm on the following operating systems:

- Linux 2.6+ Intel (x86, x86_64) with glibc 2.3.3+
- Mac OS X 10.6+ (x86_64)

Recommended for CentOS/RHEL 6: Change the following parameters in the `[Pcre]` section of the `/etc/php.ini` file to the values shown below. This ensures that very large comments are displayed:

- `pcre.backtrack_limit = 1000000`
- `pcre.recursion_limit = 10000`

You may be able to get Swarm running on another platform if you build P4PHP yourself and satisfy the other runtime dependencies. Instructions on how to obtain and build P4PHP from source can be found [here](#).

Important

P4PHP does not support threaded operation. If you compile P4PHP from source, ensure that the version of PHP you compile for is non-threaded.

Apache web server

Swarm requires Apache HTTP Server 2.2 or newer:

- <https://httpd.apache.org>

Swarm also requires the following Apache modules:

- `mod_php x` for interacting with PHP (usually installed with PHP)
Where x is the version of PHP you are running. For supported versions of PHP, see "[PHP](#)" on the [facing page](#).
- `mod_rewrite` URL rewriting engine
https://httpd.apache.org/docs/2.2/mod/mod_rewrite.html

Important

Only the `prefork` MPM is supported. Use of the worker or event MPMs is not supported and is

likely to cause problems because P4PHP does not support threaded operation.

For more information on the prefork MPM, see:

- <https://httpd.apache.org/docs/2.2/mod/prefork.html>
- <https://httpd.apache.org/docs/2.4/mod/prefork.html>

PHP

Swarm requires PHP 5.3.3+, 5.4.x, 5.5.x, 5.6.x, or 7.0:

- <https://secure.php.net>

Important

PHP must be non-threaded because P4PHP does not support threaded operation.

Swarm requires the following PHP extensions:

- iconv (character encoding converter)
<https://secure.php.net/iconv>
This is typically enabled by default with most PHP distributions
- JSON (JavaScript Object Notation)
<https://secure.php.net/json>
This is typically enabled by default with most PHP distributions, although recent distributions are making this optional
- Session (session handling)
This is typically enabled by default with most PHP distributions
- P4PHP (the Perforce PHP Extension)
Included with the Swarm package. See the install directions.
- php-xml (DOM API for XML manipulation)
Included with PHP on many operating systems, but must be manually installed on CentOS/RHEL. When not installed, the Swarm RSS feed does not work.
- php-mbstring (multi-byte character strings)
Included with PHP on many operating systems, but must be manually installed on CentOS/RHEL. When not installed, the Swarm's RSS feed does not work.

Swarm greatly benefits from the following PHP extensions:

- One of (but not both):
 - APC (the Alternative PHP Cache)
<https://secure.php.net/apc>
Installation instructions for APC.
 - Zend OPcache
<https://secure.php.net/opcache>
Installation instructions for Zend OPcache.
- Imagick (integrates ImageMagick into PHP)
<https://secure.php.net/imagick>
Installation instructions for Imagick.

Helix Core Server requirements

Swarm works with any [supported version](#) of the Helix Server (Standard Maintenance). The versions supported in this release of Swarm are:

- 2016.2 at 1612602 or later
- 2017.1 at 1622573 or later
- 2017.2 at 1622831 or later
- 2018.1
- 2018.2

Download Helix Server from here: <https://www.perforce.com/downloads/helix-core-p4d>

Helix Server automated user requirements for Swarm

Swarm requires an automated user with at least admin privileges in the Helix Core Server to enable Swarm to run against the Helix Server. This can be an existing user, or a new user created specifically to support Swarm.

Important

If your Helix Server is configured for multi-factor authentication, the user account running Swarm must not use MFA.

For more information about setting up Helix Core Server, see [Installing and upgrading the server](#) in *Helix Core Server Administrator Guide: Fundamentals*.

Trigger dependencies

Swarm triggers are installed on the Helix Server during Swarm installation.

The Swarm triggers require `perl 5.08+`:
<https://www.perl.org/get.html>

On the Windows platform, we have tested Swarm against Strawberry Perl. There are two Perl modules that are also required which may not be part of a minimal Perl installation.

- **HTTP::Tiny** is required to make calls to the Swarm server. If this is not present, then the trigger will attempt to use the command line curl program. This module is standard on Strawberry Perl on Windows, and available as a package with the version of Perl provided on CentOS 7, Ubuntu 14.04 and Ubuntu 16.04.

IO::Socket::SSL is required if the Swarm server is configured to use SSL and HTTP::Tiny is present. This is provided as standard by Strawberry Perl, and available on Linux.

Warning

If the **HTTP::Tiny** module is not available, for example on CentOS 6, then the triggers require the use of **curl**. This must be installed for the triggers to function. On CentOS 6 this can be done using the **yum** package installer using **yum install curl** if it isn't already installed.

Swarm triggers also require the following perl modules to be installed:

- **Windows:**
 - **JSON** is required to exchange data between the browser and the server and is included by default with Strawberry Perl.
- **Ubuntu:**
 - **JSON** is required to exchange data between the browser and the server and must be installed.
 - **libjson-perl** is required to manipulate JSON formatted data and must be installed.
- **CentOS/RHEL:**
 - **JSON** is required to exchange data between the browser and the server and must be installed.
 - **perl-JSON** is required to manipulate JSON formatted data and must be installed.

Swarm package installation on the same machine as P4D

If Swarm is installed from a package on the same machine as P4D, the triggers require the following perl modules to be installed:

- **Ubuntu:**
 - **Perl 5.08+**
 - **libio-socket-ssl-perl** is required if the Swarm server is configured to use SSL.
 - **libjson-perl** is required to manipulate JSON formatted data and must be installed.

- **CentOS/RHEL:**

- `Perl 5.08+`
- `perl-IO-Socket-SSL` is required if the Swarm server is configured to use SSL.
- `perl-JSON` is required to manipulate JSON formatted data and must be installed.

Worker dependencies

The recurring task to invoke Swarm workers, installed in a [later step](#), requires either of:

- `curl`
<https://curl.haxx.se/download.html>

Note

For Windows, `curl.exe` depends on `MSVCR100.dll`. You can get a copy by installing the **Microsoft Visual C++ Redistributable Package**, available for:

- 32-bit systems: <https://www.microsoft.com/download/en/details.aspx?id=5555>
- 64-bit systems: <https://www.microsoft.com/download/en/details.aspx?id=14632>

If you install Swarm with HTTPS, `curl.exe` requires recent CA certificates (or HTTPS connections silently fail). You can get a copy of the `cacert.pem` from:

<https://curl.haxx.se/docs/caextract.html>

Once downloaded, copy `cacert.pem` to the same folder where you installed `curl.exe`, and rename it to `curl-ca-bundle.crt`.

Warning

If `curl` (or `curl.exe` on Windows) cannot execute as expected, trigger execution may block or fail. For example, if `MSVCR100.dll` is missing from a Windows system, invoking `curl.exe` causes a dialog to appear.

Prior to configuring the [triggers](#), verify that `curl` executes. On Linux systems, run:

```
$ curl -h
```

On Windows systems, run:

```
C:\> curl.exe -h
```

The start of the output should be similar to:

```
Usage: curl [options...] <url>
Options: (H) means HTTP/HTTPS only, (F) means FTP only
        --anyauth          Pick "any" authentication method (H)
```

```
-a, --append          Append to target file when uploading (F/SFTP)
--cacert FILE        CA certificate to verify peer against (SSL)
--capath DIR         CA directory to verify peer against (SSL)
...[truncated for brevity]...
```

For a more thorough test that actually fetches content over a network, try the following test:

- For Linux systems, run:

```
$ curl https://www.perforce.com/
```

- For Windows systems, run:

```
C:\> curl.exe https://www.perforce.com/
```

The output should look like HTML.

- **wget**

<https://ftp.gnu.org/gnu/wget>

<http://gnuwin32.sourceforge.net/packages/wget.htm> (for Windows)

Note

If you are using Powershell on Windows systems, be aware that Powershell includes aliases for **curl** and **wget** that call the Powershell command **Invoke-WebRequest** instead of **curl.exe** or **wget.exe**. **Invoke-WebRequest** has different command-line options than either **curl** or **wget**, which can be confusing.

If you want to remove the built-in aliases for **curl** and **wget** from Powershell, follow these steps:

1. Create a Powershell profile (only if you have not already done so):

```
PS C:\> New-Item $profile -force -itemtype file
```

2. Edit your profile:

```
PS C:\> notepad $profile
```

3. Add the following line to your profile:

```
remove-item alias:curl
remove-item alias:wget
```

4. Save the profile and close **notepad**.

5. Reload your profile:

```
PS C:\> . $profile
```

Supported web browsers

The following browsers are supported for use with Swarm:

- Apple Safari, latest stable version
- Google Chrome, latest stable version
- Mozilla Firefox, latest stable version
- Microsoft Edge, latest stable version
- Microsoft Internet Explorer, latest stable version

Other web browsers might also work, including prior, development or beta builds of the above web browsers, but are not officially supported.

Note

JavaScript and cookies must be enabled in the web browser for Swarm to operate.

Optional dependencies

LibreOffice

Swarm can display previews of office-type documents when LibreOffice is installed on the Swarm server. Installation is not required, but when LibreOffice is installed Swarm automatically detects its presence.

For more information about LibreOffice, see "[LibreOffice](#)" on page 357.

Zip

You can download a ZIP archive of files/folders when the zip command-line tool is installed on the Swarm server.

For more information about installing and configuring Zip, see "[Zip archive](#)" on page 359.

Security-enhanced Linux (SELinux)

Swarm supports SELinux on CentOS 7. SELinux is an advanced access control mechanism that improves security for Linux distributions.

SELinux operates in one of three modes:

- **enforcing**: this mode blocks and logs any actions that do not match the defined security policy. This is the default mode for SELinux on CentOS 7.
- **permissive**: this mode logs actions that do not match the defined security policy but these

actions are not blocked.

- **disabled**: in this mode SELinux is off, actions are not blocked and are not logged.

See "[SELinux on CentOS 7 configuration](#)" on page 104 for details.

If you see a Swarm configuration error similar to the error shown below, SELinux has not been correctly configured for Swarm. Check you have configured [SELinux on CentOS 7](#) correctly.

Swarm has detected a configuration error

Problem detected:

- The data directory (`/opt/perforce/swarm/data`) is not writeable.

Please investigate the below PHP error:

Cannot write to cache directory (`'/opt/perforce/swarm/data/cache'`). Check permissions.

`/opt/perforce/swarm/library/Record/Cache/Cache.php` on line 318

For more information, please see the [Setting Up](#) documentation; in particular:

- [Initial Installation](#)
- [Runtime dependencies](#)
- [PHP configuration](#)
- [Swarm configuration](#)

Please ensure you restart your web server after making any PHP changes.

Choose the installation process

Once you have reviewed the "[Runtime dependencies](#)" on page 81 and know that you can satisfy them, there are a number of ways to install Swarm.

Tip

Installing Swarm using "[Install and configure Swarm from a package](#)" on page 91 ensures that all of the Swarm dependencies are installed and is the easiest way to install Swarm.

Choose one of the following installation processes:

- **Swarm packages (RPM or Debian):**
 1. Follow the steps provided in "[Install and configure Swarm from a package](#)" on page 91.
 2. Configure the Swarm triggers on the Helix Server, see "[Helix Core Server configuration for Swarm](#)" on page 127.

3. Review the post-install configuration options to customize your Swarm installation, see ["Post-install configuration options" on page 148](#).
4. You are now all set to start using Swarm. Enjoy!

Tip

To get started with Swarm, see the ["Quickstart" on page 24](#) chapter.

■ **Swarm.ova (Open Virtualization Appliance):**

1. Follow the steps provided in ["Deploy and configure a Swarm VM from an OVA" on page 107](#).
2. Configure the Swarm triggers on the Helix Server, see ["Helix Core Server configuration for Swarm" on page 127](#).
3. Review the post-install configuration options to customize your Swarm installation, see ["Post-install configuration options" on page 148](#).
4. You are now all set to start using Swarm. Enjoy!

Tip

To get started with Swarm, see the ["Quickstart" on page 24](#) chapter.

■ **Swarm.tgz (Tarball):**

1. Follow steps provided in the ["Install and configure Swarm manually from a Tarball" on page 113](#).
2. Configure Apache, see ["Apache configuration" on page 114](#).
3. Configure PHP, see ["PHP configuration" on page 119](#).
4. Configure Swarm, see ["Swarm configuration" on page 124](#).
5. Establish a trigger token, see ["Establish trigger token" on page 127](#).
6. Configure the Swarm triggers on the Helix Server, see ["Helix Core Server configuration for Swarm" on page 127](#).
7. Set up a recurring task to spawn workers, see ["Set up a recurring task to spawn workers" on page 143](#).
8. Review the post-install configuration options to customize your Swarm installation, see ["Post-install configuration options" on page 148](#).
9. You are now all set to start using Swarm. Enjoy!

Tip

To get started with Swarm, see the ["Quickstart" on page 24](#) chapter.

Install and configure Swarm from a package

Helix Swarm is available in two distribution package formats: Debian (. **deb**) for Ubuntu systems and RPM (. **rpm**) for CentOS and RedHat Enterprise Linux (RHEL).

Using distribution packages greatly simplifies the installation, updating, and removal of software, as the tools that manage these packages are aware of the dependencies for each package.

Note

The Swarm packages have been thoroughly tested on Ubuntu 14.04 LTS and Ubuntu 16.04 LTS, and CentOS/RHEL 6.1-6.7, and CentOS/RHEL 7. While the packages should work on other compatible distributions, these have not been tested.

Note

Helix Core Server can refer to a Helix Server machine (**p4d**), proxy, broker, replica, edge server, or commit server. For simplicity, the term *Helix Server* is used to refer to any configuration of a Helix Core Server machine.

Installation

Important

Review the Helix Server requirements before you install Swarm, see "[Helix Core Server requirements](#)" on page 84.

1. Configure the Perforce package repository, on the server to host Swarm and on the server hosting your Helix Core Server.

Important

If the server hosting your Helix Core Server cannot use packages, for example when it is running Windows, skip this step on that server.

As root, run one of the following:

- **For Ubuntu 14.04:**

Create the file `/etc/apt/sources.list.d/perforce.list` with the following content:

```
deb http://package.perforce.com/apt/ubuntu/ trusty release
```

- **For Ubuntu 16.04:**

Create the file `/etc/apt/sources.list.d/perforce.list` with the following content:

```
deb http://package.perforce.com/apt/ubuntu/ xenial release
```

- **For CentOS/RHEL 6:**

Create the file `/etc/yum.repos.d/helix-swarm.repo` with the following content:

```
[Perforce]
name=Perforce
baseurl=http://package.perforce.com/yum/rhel/6/x86_64/
enabled=1
gpgcheck=1
```

- **For CentOS/RHEL 7:**

Create the file `/etc/yum.repos.d/helix-swarm.repo` with the following content:

```
[Perforce]
name=Perforce
baseurl=http://package.perforce.com/yum/rhel/7/x86_64/
enabled=1
gpgcheck=1
```


2. Import the Perforce package signing key, on the server to host Swarm and the server hosting your Helix Core Server.

Important

If the server hosting your Helix Server cannot use packages, for example when it is running Windows, skip this step on that server.

Run one of the following:

- **For Ubuntu:**

```
$ wget -qO - https://package.perforce.com/perforce.pubkey |  
sudo apt-key add -  
$ sudo apt-get update
```

- **For CentOS/RHEL (run this command as root):**

```
# rpm --import https://package.perforce.com/perforce.pubkey
```

For information about how to verify the authenticity of the signing key, see:

<https://www.perforce.com/perforce-packages>

3. Install the main Swarm package on the server to host Swarm.

Run one of the following:

- **For Ubuntu:**

```
$ sudo apt-get install helix-swarm
```

- **For CentOS/RHEL (run this command as root):**

```
# yum install helix-swarm
```

Note

For CentOS/RHEL, the firewall configuration may need to be adjusted to allow access to the web server.

- **For CentOS/RHEL 6.x:**

```
$ sudo lokkit -s http
```

If you subsequently wish to enable HTTPS, run (as root):

```
$ sudo lokkit -s https
```

- **For CentOS/RHEL 7.x:**

```
$ sudo firewall-cmd --permanent --add-service=http
```

```
$ sudo systemctl reload firewalld
```

If you subsequently wish to enable HTTPS, run (as root):

```
$ sudo firewall-cmd --permanent --add-service=https
```

```
$ sudo systemctl reload firewalld
```

4. Install the Swarm triggers package on the server hosting your Helix Core Server.

Install this package on the server hosting your Helix Core Server, which may be the same server that is hosting Swarm, or elsewhere on your network.

Important

If the server hosting your Helix Server cannot use packages, for example when it is running Windows, you need to copy the appropriate Swarm trigger script from `/opt/perforce/swarm/p4-bin/scripts` to the server hosting your Helix Server. The `swarm-trigger.pl` is for both Linux and Windows systems. Once copied, the trigger script needs to be configured. See "[Helix Core Server configuration for Swarm](#)" on [page 127](#) for details.

Run one of the following:

- **For Ubuntu:**

```
$ sudo apt-get install helix-swarm-triggers
```

- **For CentOS/RHEL (run this command as root):**

```
$ yum install helix-swarm-triggers
```

Important

The package installs a config file at `/opt/perforce/etc/swarm-trigger.conf` that you will need to modify. See "[Helix Core Server configuration for Swarm](#)" on [page 127](#) for more details on configuring that file.

5. **Optional:** Install the Swarm optional package, on the server hosting Swarm.

While not required, installing this package installs the dependencies required to use the Imagick and LibreOffice Swarm modules. These modules provide previews of a variety of image and office documents.

Run one of the following:

- **For Ubuntu:**

```
$ sudo apt-get install helix-swarm-optional
```

- **For CentOS/RHEL (run this command as root):**

```
# yum install helix-swarm-optional
```

Important

This package depends on the package `php-pecl-imagick` which is available from the EPEL project. In order to install packages from EPEL, you will need to add the EPEL repository and accept its signing key. Instructions are available at: <https://fedoraproject.org/wiki/EPEL>

Note

Installation of this package also installs `APC` for CentOS/RHEL 6, or `Zend OPcache` for CentOS/RHEL 7.

6. **Recommended for CentOS/RHEL 6:** Change the following parameters in the `[Pcre]` section of the `/etc/php.ini` file to the values shown below. This ensures that very large comments are displayed:
 - `pcre.backtrack_limit = 1000000`
 - `pcre.recursion_limit = 10000`
7. Complete the "Post-installation configuration" below steps.

Post-installation configuration

Once the helix-swarm package has been installed, additional configuration is required. Perform the following steps:

1. Use the Swarm configuration script to setup Swarm, on the server hosting Swarm.

Note

The Swarm configuration script can be used in a few different ways. The steps below outline

the most straightforward configuration using an interactive install, but you can review the options by running:

```
$ sudo /opt/perforce/swarm/sbin/configure-swarm.sh -h
```

Run an interactive install:

```
$ sudo /opt/perforce/swarm/sbin/configure-swarm.sh
```

The configuration script displays the following summary:

```
-----  
configure-swarm.sh: Thu Aug 25 11:29:49 PDT 2016: commencing  
configuration of Swarm  
Summary of arguments passed:  
Interactive?      [yes]  
Force?           [no]  
P4PORT           [(not specified)]  
Swarm user       [(not specified, will suggest swarm)]  
Swarm password   [(not specified)]  
Email host       [(not specified)]  
Swarm host       [(not specified, will suggest myhost)]  
Swarm port       [80]  
Swarm base URL   [(default (empty))]  
Create Swarm user? [no]  
Super user       [(not specified)] * not needed  
Super password   [(not specified)] * not needed
```

2. Provide information to the configuration script.

After the summary, the configuration script prompts for the following information:

a. Specify a value for **P4PORT**.

```
No P4PORT specified
```

```
Swarm requires a connection to a Helix Core Server.  
Please supply the P4PORT to connect to.
```

```
Helix Core Server address (P4PORT):
```

Specify the hostname and port for your Helix Server. If defined, the value for P4PORT is used as the default. The configuration script verifies that it can connect:

```
-response: [myp4host:1666]
```

```
Checking P4PORT [myp4host:1666]...
```

```
-P4 command line to use: [/opt/perforce/bin/p4 -p myp4host:1666]
```

```
Attempting connection to [myp4host:1666]...
```

```
-connection successful:
```

```
Server address: myp4host:1666
```

```
Server version: P4D/LINUX26X86_64/2016.1/1411799 (2016/07/12)
```

```
Server license: 10000 users (support ends 2017/05/16)
```

```
Server license-ip: 192.168.0.1
```

Important

If your Helix Core Server is deployed using the commit-edge architecture, ensure that the Swarm port value points to the commit server.

For more information, see [Commit-edge](#) in the *Helix Core Server Administrator Guide: Multi-Site Deployment*.

- b. Specify the userid and password of a normal user with admin-level privileges in the Helix Core Server.

```
Checking Swarm user credentials...
No Swarm user specified
```

```
Swarm requires a Helix user account with 'admin' rights.
Please provide a username and password for this account.
If this account does not have 'admin' rights, it will
be set for this user.
```

```
Helix username for the Swarm user [swarm]:
```

Enter the userid. The default is *swarm*.

Note

If the Helix Server user account is given 'super' rights, then this allows a user to clean up a review created by another user when the review is committed. See ["Review cleanup" on page 402](#).

```
-response: [swarm]
```

```
Helix password or login ticket for the Swarm user (typing
hidden):
```

Enter the login ticket, or password, for the userid.

Note

You can obtain a login ticket by running (in another shell):

```
$ p4 -p myp4host:1666 -u userid login -p
```

If the login ticket you provide would expire in less than a year, you will receive a warning.

```
Checking Swarm user credentials...
```

```
-checking if user [swarm] exists in [myp4host:1666]...
```

```
-user exists
```

```
Obtaining Helix login ticket for [swarm] in [myp4host:1666]...
```

```
-login ticket obtained
```

```
Checking user [swarm]'s ticket against [myp4host:1666]...
```

```
-login ticket is good
```

```
Checking user [swarm] has at least access level [admin]...  
-user has maximum access level [admin]  
-user meets minimum access level [admin]
```

c. Specify the hostname for the Swarm UI.

Swarm needs a distinct hostname that users can enter into their browsers to access Swarm. Ideally, this is a fully-qualified domain name, e.g. 'swarm.company.com', but it can be just a hostname, e.g. 'swarm'.

Whatever hostname you provide should be Swarm-specific and not shared with any other web service on this host.

Note that the hostname you specify typically requires configuration in your network's DNS service. If you are merely testing Swarm, you can add a hostname->IP mapping entry to your computer's hosts configuration.

Hostname for this Swarm server [myhost]:

Note

The default is the current hostname. The configuration script does not verify that the hostname actually works (DNS configuration may not exist yet).

d. Specify a mail relay host.

Swarm requires an mail relay host to send email notifications.

Mail relay host (e.g.: mx.yourdomain.com):

Note

The configuration script does not verify that the mail relay host you provide actually accepts SMTP connections.

Once this information has been provided, the configuration script performs the following steps (some of the detail depends on the version of PHP and Apache that is installed):

```
Configuring Cron...
`/opt/perforce/etc/swarm-cron-hosts.conf.new' -&gt;
`/opt/perforce/etc/swarm-cron-hosts.conf'
-updated cron configuration file with supplied Swarm host
Configuring Swarm installation...
-composed new Swarm config file contents
`/opt/perforce/swarm/data/config.php.new' -&gt;
`/opt/perforce/swarm/data/config.php'
-wrote new Swarm config file to reflect new configuration
-identified Apache user:group: [www-data:www-data]
-setting permissions on the Swarm data directory...
-ensured file permissions are set properly
Configuring Apache...
-identified Swarm virtual host config file: [/etc/apache2/sites-
available/perforce-swarm-site.conf]
-identified Apache log directory: [/var/log/apache2]
-updated the vhost file to set Apache log directory
-updated the vhost file to reflect Swarm host
-checking Apache modules...
Enabling module rewrite.
Module php5 already enabled
To activate the new configuration, you need to run:
  service apache2 restart
```

```
-proper Apache modules are enabled
-enabling Swarm Apache site...
Enabling site perforce-swarm-site.conf.
To activate the new configuration, you need to run:
  service apache2 reload
-Swarm Apache site enabled
-restarting Apache...
-Apache restarted
configure-swarm.sh: Thu Aug 25 11:31:36 PDT 2016: completed
configuration of Helix Swarm

::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::::
:::::
::
::  Swarm is now configured and available at:
::
::      http://myhost/
::
::  You may login as the Swarm user [swarm] using the password
::  you specified.
::
::  Please ensure you install the following package on the server
::  hosting your Helix Core Server.
::
::      helix-swarm-triggers
::
::  (If your Helix Core Server is hosted on an OS and
::  platform that is not compatible with the above package, you
can
::  also install the trigger script manually.)
::
::  You will need to configure the triggers, as covered in the
Swarm
```

```

:: documentation:
::
::
http://www.perforce.com/perforce/doc.current/manuals/swarm/setup.
perforce.html
::
:: Documentation for optional post-install configuration, such
as
:: configuring Swarm to use HTTPS, operate in a sub-folder, or
on a
:: custom port, is available:
::
::
https://www.perforce.com/perforce/doc.current/manuals/swarm/setup
.post.html
::

.....
:::::

```

Note

If you have installed Swarm on a host that does not provide other web services, you may wish to disable Apache's default site configuration. Doing so means that regardless of the hostname a user might use to reach the web server hosting Swarm, Swarm would be presented.

Be aware that disabling Apache's default site configuration could disable existing web services or content.

Disabling Apache's default site configuration on Ubuntu hosts is easy. Run:

```
$ sudo a2dissite 000-default
```

For CentOS hosts, or for non-standard Apache installations, you would need to manually adjust the Apache configuration. Such changes require familiarity with Apache configuration; for more details, see:

<https://httpd.apache.org/docs/current/configuring.html>

3. **Optional:** To configure SELinux on CentOS 7 for Swarm, see "SELinux on CentOS 7 configuration" on the next page.
4. The basic Swarm configuration is now complete.

5. Configure the Swarm triggers on the Helix Server, see ["Helix Core Server configuration for Swarm" on page 127](#).

SELinux on CentOS 7 configuration

Swarm supports SELinux on CentOS 7. SELinux is an advanced access control mechanism that improves security for Linux distributions.

SELinux operates in one of three modes:

- **enforcing**: this mode blocks and logs any actions that do not match the defined security policy. This is the default mode for SELinux on CentOS 7.
- **permissive**: this mode logs actions that do not match the defined security policy but these actions are not blocked.
- **disabled**: in this mode SELinux is off, actions are not blocked and are not logged.

SELinux must be configured to enable it to work correctly with Swarm, these configuration steps are shown below.

Note

You must complete the Helix Swarm package ["Installation" on page 91](#) steps, and the ["Post-installation configuration" on page 96](#) steps before configuring SELinux.

Configure SELinux on CentOS 7 to enforcing mode

Run the following commands as root:

1. Install the **policycoreutils-python** package, this contains **semange** which is used to configure SELinux:

```
root $ yum install policycoreutils-python
```

2. Check the current SELinux mode:

```
root $ getenforce
```

3. SELinux will report its mode as; **enforcing**, **permissive**, or **disabled**.
 - a. If the mode is not set correctly edit the **/etc/selinux/config** file with vi or a similar editor.

```
root $ vi /etc/selinux/config
```

- b. Edit the config file so that **SELinux=** is set to **enforcing** .
- c. Save the config file.
- d. Reboot the server to complete the SELinux mode change.

4. Define the context of the `/opt/perforce/swarm` directory and the files in it to `httpd_sys_rw_content_t`:

```
root $ semanage fcontext -a -t httpd_sys_rw_content_t
"/opt/perforce/swarm(/.*)?"
root $ restorecon -R /opt/perforce/swarm
```

5. Set the SELinux Boolean value to `httpd_can_network_connect 1` to allow Swarm to connect to p4d and other services:

```
root $ setsebool -P httpd_can_network_connect 1
```

6. Define the context of the `/opt/perforce/swarm/p4-bin` directory and the files in it to `httpd_sys_script_exec_t`

```
root $ semanage fcontext -a -t httpd_sys_script_exec_t
'/opt/perforce/swarm/p4-bin(/.*)?'
root $ restorecon -R -v /opt/perforce/swarm/p4-bin
```

7. Restart the system:

```
root $ systemctl restart httpd
```

8. Check that you can log in to Swarm.
9. Reboot the server.
10. Check that you can log in to Swarm.
11. SELinux is now configured for Swarm.

Note

If you can not log in to Swarm it is possible that SELinux is blocking Swarm because its configuration is incorrect. You will need to troubleshoot the SELinux configuration to find any issues.

Install the `setroubleshoot` package, this contains `sealert` which is used when troubleshooting SELinux:

```
root $ yum install setroubleshoot
```

`sealert` helps you to interpret the contents of the `audit.log`. Run the following command:

```
root $ sealert -a /var/log/audit/audit.log
```

Error message: If you see an error message with a title similar to the message below, it may be because you are running CentOS 7 on a Virtual Machine (VM).

```
root $ SELinux is preventing /usr/sbin/ldconfig from write access on the
directory etc.
```

Install `open-vm-tools` on the VM and reboot the VM.

```
root $ yum install open-vm-tools
```

Configure SELinux on CentOS 7 to permissive or disabled mode

Run the following as root:

1. Check the current SELinux mode:

```
root $ getenforce
```

2. SELinux will report its mode as; **enforcing**, **permissive**, or **disabled**.
 - a. If the mode is not set correctly edit the **/etc/selinux/config** file with vi or a similar editor.

```
root $ vi /etc/selinux/config
```

- b. Edit the config file so that **SELinux=** is set to **permissive** or **disabled** as required.
 - c. Save the config file.
 - d. Reboot the sever to complete the SELinux mode change.
3. Check that you can log in to Swarm.
 4. SELinux is now configured for Swarm.

Updating

See "[Update a Swarm package installation](#)" on page 166 for details.

Uninstall

1. Remove the Swarm triggers from your Helix Server.
2. Remove the Swarm trigger scripts from the server hosting your Helix Server.

Important

If you manually installed the trigger script, perhaps because the server hosting your Helix Server cannot use packages (e.g. Windows), manually remove the script.

Run one of the following:

- **For Ubuntu:**

```
$ sudo apt-get remove helix-swarm helix-swarm-triggers helix-swarm-optional
```

- **For CentOS/RHEL (run this command as root):**

```
# yum remove helix-swarm helix-swarm-triggers helix-swarm-optional
```

Deploy and configure a Swarm VM from an OVA

Swarm is available as an OVA (Open Virtualization Appliance) that requires minimal configuration.

Use the Swarm OVA if you want to:

- Simplify the installation and configuration steps
- Experiment with Swarm without using additional hardware
- Install Swarm without having a Linux-based server available

Note

Helix Core Server can refer to a Helix Server machine (**p4d**), proxy, broker, replica, edge server, or commit server. For simplicity, the term *Helix Server* is used to refer to any configuration of a Helix Core Server machine.

Before you begin

Important

Review the Helix Server requirements before you install Swarm, see "[Helix Core Server requirements](#)" on page 84.

You will need the following information to deploy the Swarm Virtual Machine (VM) from the OVA:

- The Helix Core Server port (P4PORT).

Important

If your Helix Core Server is deployed using the commit-edge architecture, ensure that the Swarm port value points to the commit server.


For more information, see the [Commit-edge](#) chapter in the *Helix Core Server Administrator Guide: Multi-Site Deployment*.

- The *UserId* of a normal user in the Helix Server with *admin* privileges.
- The Ticket, or password of the *admin-level* Perforce user.
- The Mail relay host address.

Deploy the Swarm OVA

To deploy the Swarm OVA, follow the instructions on this page.

1. Download the [Swarm OVA](#).
2. Import the OVA into your virtualization environment, see "[VMWare OVA import](#)" on page 112 or "[Oracle VirtualBox import](#)" on page 112 for details.
3. Start the VM, diagnostic and boot information is displayed as the VM starts. The configuration welcome screen is displayed when the boot is complete:

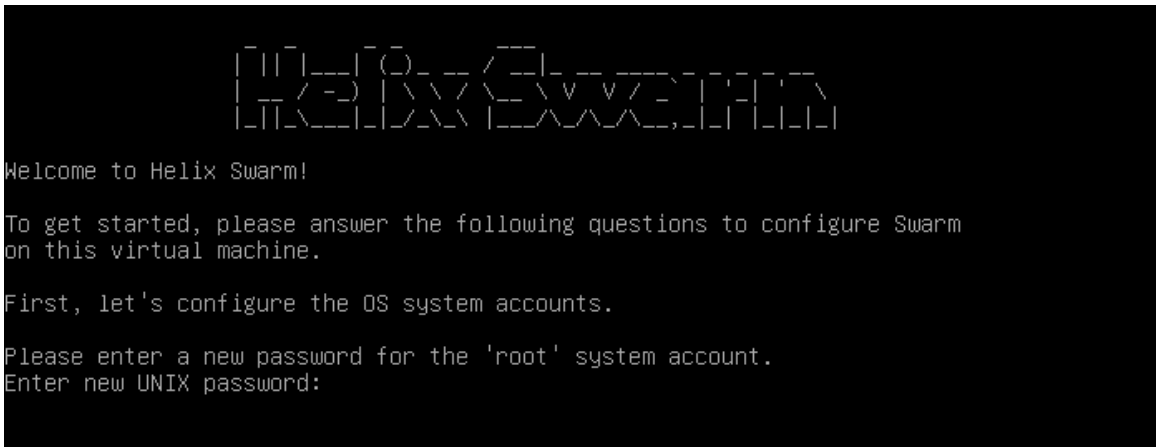

```
[Progress Bar]  
Welcome to Helix Swarm!  
To get started, please answer the following questions to configure Swarm  
on this virtual machine.  
First, let's configure the OS system accounts.  
Please enter a new password for the 'root' system account.  
Enter new UNIX password:
```

4. Follow the configuration script prompts to configure the Swarm VM passwords and hostname:
 - a. Set a password for the root user.
 - b. Set a password for the system swarm user.
 - c. Set a hostname for the Swarm VM.

5. The configuration script displays the following prompt:

```
Do you want to proceed with Swarm configuration (Y/n)?
```

You now have two choices:

- Proceed with VM configuration, see "[Proceed with the Swarm VM configuration script](#)" [below](#) for details.
- or
- Exit the Swarm VM configuration script to make changes from the VM operating system and then return to the Swarm configuration script. For example, you may need to edit the VM network configuration or install P4D on the same VM. See "[Exit the Swarm VM configuration script](#)" [below](#) for details.

Proceed with the Swarm VM configuration script

- a. To proceed with the Swarm VM configuration script, press the **Enter** key.
- b. Press the **Enter** key again to restart the Swarm VM configuration script.
- c. Finalize Swarm VM configuration, see "[Finalize Swarm configuration](#)" [on the next page](#) for details.

Exit the Swarm VM configuration script

- a. To exit the Swarm VM configuration script, type **n** and press the **Enter** key
- b. The Swarm configuration script exits and the welcome screen is displayed:

- c. Select **Login** and press the **Enter** key. Login to the VM as the *root* user.
- d. Make changes to the VM as required.
- e. When you have finished making changes to the VM, rerun the `configure-swarm.sh` script from the `/opt/perforce/swarm/sbin` directory:

```
root@swarm:~# /opt/perforce/swarm/sbin/configure-swarm.sh
```

- f. Finalize Swarm VM configuration, see "Finalize Swarm configuration" below for details.

Finalize Swarm configuration

Follow the Swarm configuration script prompts to finalize Swarm VM configuration:

1. Enter the Helix Core Server port (P4PORT) number.

Important

If your Helix Core Server is deployed using the commit-edge architecture, ensure that the Swarm port value points to the commit server.

6. Update the VM with security updates and bug fixes:
 - a. Use `ssh` to log into the VM as the `root` user.
 - b. Enter the following commands to update the VM packages list and to apply any available upgrades.

```
$ apt-get update
$ apt-get upgrade
```

See [OVA Management](#) for more details.

Note

Now that the Swarm VM is configured and running, you can edit the configuration by using `ssh` to connect to the VM as the system `swarm` user and editing the "Swarm configuration" on page 124 file `/opt/perforce/swarm/data/config.php`. The Swarm installation folder is `/opt/perforce/swarm/`.

7. The basic Swarm configuration is now complete.
8. Configure the Swarm triggers on the Helix Server, see "Helix Core Server configuration for Swarm" on page 127.

VMWare OVA import

The Swarm OVA works with several VMWare virtualization products, such as Player, Workstation, and Fusion.

1. In the VMWare product, select **File > Open**.
2. Browse to the `swarm.ova` file and click **Open**.
3. Type a name for the virtual machine, such as `Swarm`, and click **Import**.

Oracle VirtualBox import

The Swarm OVA works with Oracle VirtualBox, version 4.x+.

1. In VirtualBox, select **File > Import Appliance**.
2. Browse to the `swarm.ova` file and click **Open**.
3. Click **Next** (this might be **Continue** for some versions of VirtualBox)
4. Click **Import**.

Install and configure Swarm manually from a Tarball

Important

Review the runtime dependencies before you install Swarm, see ["Runtime dependencies"](#) on [page 81](#).

1. Download the [Swarm tarball](#).
2. Expand the Swarm package (a *compressed tarball*).

From the command line, expand it via the tar command:

```
$ tar -zxvf swarm.tgz
```

The contents of the Swarm package are expanded into a top-level folder named **swarm-*version***, where *version* corresponds to the version downloaded.

Tip

Many graphical file manager applications (Nautilus on Linux, Finder on Mac, etc.) can automatically expand the tarball package by simply double-clicking it.

3. Move the contents of the Swarm package to the correct location.

Identify a location for the Swarm files; this should correspond to a location associated to the virtual host configured under Apache (see ["Apache configuration"](#) on the next page).

```
$ mv /path/to/swarm-version /path/to/vhosts/swarm
```

4. Assign correct ownership and permission for the Swarm files.

The data top-level folder in the Swarm distribution needs to be writeable by the web server. To achieve this effect, simply change ownership of the data folder to the web user:

```
$ sudo chown -R www /path/to/vhosts/swarm/data
```

The **www** user above is an example of what the web server user name might be. Depending on your distribution, this could be **_www**, **web**, **nobody** or something else entirely.

If your web server is already running, you can discover the user with:

```
$ ps aux | grep -E 'apache|httpd'
root          3592  0.0  0.5 405240 20708 ?        Ss   May03
4:32 /usr/sbin/apache2 -k start
www           20016  0.0  0.2 405264  9796 ?        S    07:45
0:00 /usr/sbin/apache2 -k start
```

In this example, **www** is the user Apache is running as.

From a security perspective, we recommend that the minimum file permissions should be granted to the user/group under which the web server runs against the Swarm distribution.

5. Configure Apache, see "[Apache configuration](#)" below.

Apache configuration

The configuration of the Apache HTTP Server (Apache) can vary between OS distributions; see the documentation specific to your installation of Apache. For example, on Mac OS X, you may have to enable Web Sharing within the Sharing control panel in System Preferences.

1. Locate your system's Apache configuration.

Common configuration directories include:

- `/etc/httpd/conf/`
- `/etc/apache2/`
- `/Applications/XAMPP/etc/`

Within the configuration path, the main Apache configuration file is usually named one of the following:

- `httpd.conf`
- `apache2.conf`

Note

A longer discussion on the possible locations and names of Apache configuration files is available [here](#):

<https://wiki.apache.org/httpd/DistrosDefaultLayout>

2. Set up an Apache virtual host (vhost) for your installation.

If your Apache configuration directory contains the directories **sites-available** and **sites-enabled**:

- a. Copy the appropriate virtual host definition below into the file **sites-available/swarm**.
- b. Enable the Swarm virtual host definition.

```
$ sudo a2ensite swarm
```

Otherwise, copy the appropriate virtual host definition below into the bottom of the main Apache configuration file, **httpd.conf** or **apache2.conf**.

- Virtual host definition example for Apache 2.2:

```
<VirtualHost *:80>
    ServerName myswarm.host
    ServerAlias myswarm
    ErrorLog "/path/to/apache/logs/myswarm.error_log"
    CustomLog "/path/to/apache/logs/myswarm.access_log"
    common
    DocumentRoot "/path/to/swarm/public"
    <Directory "/path/to/swarm/public">
        AllowOverride All
        Order allow,deny
        Allow from all
    </Directory>
</VirtualHost>
```


- Virtual host definition example for Apache 2.4:

```
<VirtualHost *:80>
    ServerName myswarm.host
    ServerAlias myswarm
    ErrorLog "/path/to/apache/logs/myswarm.error_log"
    CustomLog "/path/to/apache/logs/myswarm.access_log" common
    DocumentRoot "/path/to/swarm/public"
    <Directory "/path/to/swarm/public">
        AllowOverride All
        Require all granted
    </Directory>
</VirtualHost>
```

Note

See Apache's virtual host documentation for details:

<https://httpd.apache.org/docs/2.2/vhosts/>

<https://httpd.apache.org/docs/2.4/vhosts/>

3. Customize the virtual host definition.

- a. Replace ***myswarm.host*** with the hostname for Swarm on your network. This may require adjusting the DNS configuration on your network.
- b. Replace ***myswarm*** with the name of the subdomain hosting Swarm. Many administrators choose ***swarm***.

Note the string ***myswarm*** in the log file paths: this should match the subdomain name and prefix for the log files, to help coordinate the active host with the log files for that host. Doing this is particularly useful when your Apache server hosts multiple instances of Swarm.

- c. Replace ***/path/to/apache/logs*** with the path where your Apache stores its log files. Apache's log files are typically named ***access_log*** and ***error_log***.
- d. Replace ***/path/to/swarm*** with the path to the Swarm directory.

4. Verify that the correct Apache modules are enabled.

Note

In this step, **x** is the version of PHP you are running, for example 5 or 7. For supported versions of PHP, see "PHP" on page 83.

- To query whether the PHP and Rewrite modules are active, use the `apachectl` utility to list all of the active modules (this may be named `apache2ctl` on your system):

```
$ apachectl -t -D DUMP_MODULES
```

- Simply look for `phpx_module` and `rewrite_module` in the output. If you see them, skip ahead to step 5.
- If the Apache utility `a2enmod` is installed, use it to enable the PHP and Rewrite modules:

```
$ sudo a2enmod php $x$  rewrite
```

- Without the `a2enmod` utility, edit the Apache configuration file by hand. Locate your Apache configuration file for modules and either uncomment or add the following lines:

```
LoadModule php $x$ _module      libexec/apache2/libphp $x$ .so
LoadModule rewrite_module   libexec/apache2/mod_rewrite.so
```

- Note that your Apache installation may have different paths for the location of its modules (the `.so` files).

5. Restart your web server.

- To ensure that the Apache configuration changes you made become active, restart the web server.

```
$ sudo apachectl restart
```

- Query Apache's active virtual hosts and modules to confirm your changes are in effect:

```
$ apachectl -t -D DUMP_VHOSTS
```

```
$ apachectl -t -D DUMP_MODULES
```

Important

Apache must be configured to use the prefork MPM because P4PHP does not support threaded operation.

The prefork **MPM** is the default for Linux and OSX Apache installations, so you may not have to do anything.

For more information on Apache MPMs and configuration, see:

<https://httpd.apache.org/docs/2.2/mpm.html>

<https://httpd.apache.org/docs/2.4/mpm.html>

6. Configure PHP, see "PHP configuration" below.

PHP configuration

PHP can vary between OS distributions; see the documentation specific to your installation of PHP.

1. First determine which `php.ini` file is in use by the PHP Apache module.

Note

It may not necessarily be the same `php.ini` file that is in use when calling PHP from the command line (running `php --ini` from the command line reports this).

If you are having trouble determining which `php.ini` the PHP Apache module is using, create a PHP file that can be served through Apache with the following contents:

```
<?php phpinfo();?>
```

Point your browser to this file and look for this table row in the resulting table:

```
Loaded Configuration File
```

2. Ensure that `date.timezone` is set correctly for your system.

Some distributions do not make a default timezone available to PHP, so the best practice to set the timezone for PHP explicitly. See the [list of supported timezones](#).

An example `date.timezone` setting in `php.ini`:

```
date.timezone = America/Vancouver
```

3. Verify that the iconv, json, and session extensions are present.

They are usually enabled by default, although you may have to install packages for them through your OS distribution. Verify they are present by searching for their respective names in the `phpinfo` output above.

4. Enable P4PHP, the Perforce extension for PHP:

For Swarm to communicate with the Helix Core Server, it needs the P4PHP extension. Swarm comes with a number of variants of the P4PHP binary, for Linux platforms (32- and 64-bit) and Mac OS X (Darwin), for PHP 5, and 7.

Note

For Linux, the default variants are compiled with glibc 2.11. We have also included PHP 5.3 variants compiled with glibc 2.3.3 to support those customers on older distributions, such as Red Hat Enterprise Linux 5.9.

To enable P4PHP, edit the web server's `php.ini` file and add the following line:

```
extension=/path/to/swarm/p4-bin/bin.<platform>/perforce-  
<variant>.so
```

Example 1: for a 64-bit Linux system running PHP 7.0:

```
extension=/path/to/swarm/p4-bin/bin.linux26x86_64/perforce-php70.so
```

Example 2: for a 64-bit Linux system running PHP 5.4:

```
extension=/path/to/swarm/p4-bin/bin.linux26x86_64/perforce-php54.so
```

Example 3: for a 32-bit Linux system running PHP 5.3 with glibc older than 2.11:

```
extension=/path/to/swarm/p4-bin/bin.linux26x86/perforce-php53-  
glibc2.3.3.so
```

Alternatively, copy the extension file to the default location for PHP extensions, and then just add this line instead:

```
extension=perforce-<variant>.so
```

5. Restart Apache for the changes to become active.

- To verify that P4PHP is active, navigate to the `phpinfo` file you [created above](#). You should then see a perforce section (search for "Perforce Module"). It should report that the module is enabled and display the version information.

Note

Be aware that any operating system upgrades on the machine hosting Swarm may involve updates to PHP. If this occurs, the `php.ini` needs to be updated to point to the correct *variant* of P4PHP to match the version of PHP that the upgraded operating system is using.

- Recommended for CentOS/RHEL 6:** Change the following parameters in the `[Pcre]` section of the `/etc/php.ini` file to the values shown below. This ensures that very large comments are displayed:
 - `pcre.backtrack_limit = 1000000`
 - `pcre.recursion_limit = 10000`
- In addition, Swarm greatly benefits from the following optional extensions, install one of the following PHP cache modules:
 - Optional:** Alternative PHP Cache (APC) extension for PHP, see ["Alternative PHP Cache \(APC\) extension for PHP"](#) below.
 - or
 - Optional:** Zend OPcache extension for PHP, see ["Zend OPcache extension for PHP"](#) on the next page.
- Optional:** Install the ImageMagick extension for PHP to improve Swarm's ability to preview graphic formats that web browsers typically cannot display, see ["ImageMagick \(imagemick\) extension for PHP"](#) on page 123.
- Configure Swarm, see ["Swarm configuration"](#) on page 124.

Alternative PHP Cache (APC) extension for PHP

APC is a free, open, and robust framework for caching and optimizing PHP intermediate code. Enabling APC improves Swarm performance by caching Swarm's compiled bytecode.

For more information, see:

<https://secure.php.net/apc>

<https://pecl.php.net/package/APC>

- We recommend that you install APC from your OS distribution, via `apt-get`, `yum`, etc. If your distribution does not offer the APC package for PHP, do so via `PECL` (although you may have to resolve system dependencies):

```
$ sudo pecl install apc
```

2. Verify that APC is enabled in your PHP Apache module's `php.ini` file (as determined in the section for P4PHP). You may need to add the following line:

```
extension=apc.so
```

3. Restart Apache for the changes to become active.
4. To verify that APC is active, navigate to the `phpinfo` file you [created earlier](#). You should then see an `apc` section (you may have to search for "APC Support"). It should report its version information and a table for its directives.

We currently do not have any specific recommendations for which APC directives to set.

Warning

Once you have completed installing and enabling P4PHP and APC, we recommend that you remove the `phpinfo` file you created to avoid disclosing information about your installation.

Zend OPcache extension for PHP

Zend OPcache, like APC, improves PHP performance by storing compiled PHP code into a cache, removing the need for PHP to load and parse scripts on each request.

Zend OPcache is bundled with PHP 5.5.x, and later. Zend OPcache is recommended for use instead of APC. For PHP versions 5.3 and 5.4, Zend OPcache is not bundled, but is available via PECL.

For more information, see:

<https://secure.php.net/opcache>

<https://pecl.php.net/package/ZendOpcache>

Install Zend OPcache

1. We recommend that you install Zend OPcache from your OS distribution, via `apt-get`, `yum`, etc. If your distribution does not offer the Zend OPcache package for PHP, do so via PECL (although you may have to resolve system dependencies):

```
$ sudo pecl install zendopcache
```

2. Verify that Zend OPcache is enabled in your PHP Apache module's `php.ini` file (as determined in the section above for P4PHP). You may need to add the following line:

```
zend_extension=/path/to/opcache.so
```

3. Restart Apache for the changes to become active.

4. To verify that Zend OPcache is active, navigate to the phpinfo file you [created earlier](#). You should then see a Zend **OPcache** section. It should report its version information and a table for its directives.

We currently do not have any specific recommendations for which Zend OPcache directives to set.

Warning

Once you have completed installing and enabling P4PHP and Zend OPcache, we recommend that you remove the phpinfo file you created to avoid disclosing information about your installation.

Enable Zend OPcache

For PHP 5.5.x and later, while Zend OPcache is included, it may not be enabled. If you choose to use it, you may need to add the following line to your PHP Apache module's `php.ini` file:

```
opcache.enable = 1
```

If you have edited `php.ini`, ensure that you restart Apache for the changes to become active.

ImageMagick (imagick) extension for PHP

Imagick is a PHP extension that integrates the ImageMagick graphics library's API for the creation and manipulation of images. Enabling Imagick improves Swarm's ability to preview graphics formats that web browsers typically cannot display.

For more information, see:

<https://secure.php.net/imagick>

<https://pecl.php.net/package/imagick>

1. We recommend that you install Imagick from your OS distribution, via `apt-get`, `yum`, etc. If your distribution does not offer the imagick package for PHP, do so via PECL (although you may have to resolve system dependencies):

```
$ sudo pecl install imagick
```

2. Verify that imagick is enabled in your PHP Apache module's `php.ini` file (as determined in the section above for P4PHP). You may need to add the following line:

```
extension=imagick.so
```

3. Restart Apache for the changes to become active.

4. To verify that imagick is active, navigate to the `phpinfo` file you [created earlier](#). You should then see an imagick section. It should report its version information and a table for its directives, supported image file formats, and more.

Warning

Once you have completed installing and enabling P4PHP and imagick, we recommend that you remove the `phpinfo` file you created to avoid disclosing information about your installation.

Swarm configuration

Now that Swarm is ready for use, you need to configure it to work in your environment.

Note

Helix Core Server can refer to a Helix Server machine (**p4d**), proxy, broker, replica, edge server, or commit server. For simplicity, the term *Helix Server* is used to refer to any configuration of a Helix Core Server machine.

Swarm configuration file

Create a file named `config.php` under the data directory with the following contents:

```
<?php
return array(
    'p4' => array(
        'port'      => 'my-helix-core-server:1666',
        'user'      => 'admin_userid',
        'password' => 'admin user ticket or password',
    ),
    'log' => array(
        'priority' => 3, // 7 for max, defaults to 3
    ),
    'mail' => array(
        'transport' => array(
            'host' => 'my.mx.host',
        ),
    ),
);
```


- For the port value, replace *my-helix-core-server:1666* with the P4PORT value used to connect to your Helix Server.

Important

If your Helix Server is deployed using the commit-edge architecture, ensure that Swarm's port value points to the commit server.

For more information, see [Commit-edge](#) in the *Helix Core Server Administrator Guide: Multi-Site Deployment*.

Warning

If the port points to a Helix Broker, ensure that the broker does not delegate commands to different replicas, edge servers, or proxies. Such delegation can cause odd problems or outright failures in Swarm.

Swarm needs to have a consistent, current view of the state of Helix Server, and works best when it connects to a central/commit server.

- For the user value, replace *admin_userid* with a normal Helix Server userid that has *admin*-level access to Helix Server.

Note

This user is used by Swarm to communicate with the Helix Server. It should not be used to perform everyday Swarm reviewing tasks.

- For the password value, while a plain-text password works, we recommend that you use a ticket value instead. Obtain the ticket value for the `admin_userid` during login with this command:

```
$ p4 -p my-helix-core-server:1666 -u admin_userid login -p
```

Note

For Helix Server with the security configurable set to level 3, or when authentication is configured to use LDAP, ticket-based authentication is required.

Important

When using ticket-based authentication, ensure that the ticket has a very long expiration. We recommend creating a group with an unlimited timeout, and adding `admin_userid` user to this group.

An expired ticket causes many Swarm operations to fail.

You can determine when the admin userid's ticket will expire with:

```
$ p4 -p my-helix-core-server:1666 -u admin_userid -P ticket_value login -s
```

For more information about tickets, see the section [Ticket-based authentication](#) in the *Helix Core Server Administrator Guide: Fundamentals*.

- For the host value, replace `my.mx.host` with the hostname of the mail exchanger service that Swarm should use to send its email notifications.

Note

Since this configuration file contains the credentials for a Helix Server *admin*-level user, we recommend that this file's ownership and permissions be adjusted such that only the web server user can read the file, and that no user can write the file.

- You can now configure some additional functionality for Swarm:
 - **Optional:** JIRA integration, see ["JIRA" on page 354](#).
 - **Optional:** LibreOffice integration, see ["LibreOffice" on page 357](#).
 - **Optional:** Manually specify the Swarm hostname, see ["Swarm hostname" on the facing page](#).
- Establish a trigger token, see ["Establish trigger token" on the facing page](#).

Optional additional Swarm configuration

Swarm provides optional functionality that could be enabled at this time:

- [JIRA integration](#)
- [LibreOffice](#)

Swarm hostname

Swarm normally auto-detects the hostname it operates under. In some system configuration, the auto-detection logic might not choose the correct hostname, such as when there are multiple virtual hosts configured for a single Swarm instance. When auto-detection chooses the wrong hostname, email notifications, worker start up, and more could be affected.

If you need to specify the Swarm hostname, see "[hostname](#)" on page 385 for details.

Establish trigger token

Trigger tokens prevent unwanted events from influencing Swarm operations; trigger requests to Swarm without a valid token are ignored.

1. [Log in](#) to Swarm as a *super* user.
2. Click your userid, found at the right of the main toolbar.
3. Select **About Swarm**.

The **About Swarm** dialog appears and Swarm generates an API token if it doesn't exist.

4. Make a note of the trigger token value displayed at the bottom of the dialog, you will need the trigger token when you configure Helix Server for Swarm.

Tip

Click on the trigger token to select it and then copy it to your clipboard. You can paste it into the `swarm-trigger.conf` file when you configure Helix Server for Swarm.

5. Configure the Swarm triggers, see "[Helix Core Server configuration for Swarm](#)" below.

Helix Core Server configuration for Swarm

Now that you have a configured instance of Swarm, the last piece is to configure your Helix Server to tell Swarm about interesting events. This is accomplished through the use of triggers.

For more information about Helix Server triggers, see [Using triggers to customize behavior in Helix Core Server Administrator Guide: Fundamentals](#).

Note

Helix Core Server can refer to a Helix Server machine (**p4d**), proxy, broker, replica, edge server, or commit server. For simplicity, the term *Helix Server* is used to refer to any configuration of a Helix Core Server machine.

Using triggers to push events to Swarm

Helix Server provides a facility called *triggers* to customize the operation of the server, or to invoke additional processing for specific kinds of versioning operations. Swarm provides a trigger script written in Perl that notifies Swarm about activity within the Helix Server.

See "[Trigger options](#)" on page 432 for more information on configuring the Perl trigger.

Set up Swarm triggers with a CentOS/RHEL 6 hosted Helix Server

The latest updates to the trigger script require dependencies which are not available on version 6 of the CentOS/RHEL platform. If you are running the triggers on CentOS 6, then the triggers have a dependency on curl which may not be installed by default on a minimal install of CentOS 6.

Set up Swarm triggers with a Windows or Linux-hosted Helix Server

Tip

Many of the steps in this procedure are common to both Windows and Linux-hosted Helix Servers. When there is a difference between the Windows and Linux operating systems, this is indicated in the procedure.

1. Ensure that the required "[Trigger dependencies](#)" on page 84 have been installed on the machine hosting the Helix Server.
2. Copy the Swarm trigger to the Helix Server
 - If your Helix Server is version 2014.1 (or later), we recommend submitting the trigger script, `p4-bin/scripts/swarm-trigger.pl`, to Helix Server and running it from the depot. The recommended depot location is `/.swarm/triggers/swarm-trigger.pl`, especially if you have already setup "[Comment attachments](#)" on page 366.
 - If your Helix Server is older than version 2014.1, or you prefer that the trigger file exist in the filesystem, you must copy the `p4-bin/scripts/swarm-trigger.pl` script to the server hosting Helix Server. If your Helix Server deployment uses the commit-edge architecture, the script must also be copied to all edge servers, and it must exist in the same path on all servers.

Note

If you are using the Swarm OVA, the full path to the trigger script within the OVA's filesystem is: `/opt/perforce/swarm/p4-bin/scripts/swarm-trigger.pl`

3. Configure the trigger.

You need to use the API token established in the "[Establish trigger token](#)" on the previous page.

`swarm-trigger.pl` can be configured directly, but the preferred approach is to create a configuration file called `swarm-trigger.conf`. Using the configuration file greatly simplifies upgrades.

If you are using the Swarm triggers package described in ["Install and configure Swarm from a package" on page 91](#), the configuration file is available at `/opt/perforce/etc/swarm-trigger.conf`, otherwise create `swarm-trigger.conf` in the same directory as `swarm-trigger.pl`.

- If you submitted the trigger script to the depot in the previous step, you should similarly submit the configuration file to the depot. The recommended depot location is `/.swarm/triggers/swarm-trigger.conf`.
- If you copied the trigger script to the commit server and all edge servers in the previous step, also copy the configuration file to the commit server and all edge servers, making sure that they exist in the same path on all servers.

The following is a sample of what your `swarm-trigger.conf` should contain:

```
# SWARM_HOST (required)
# Hostname of your Swarm instance, with leading "http://" or
"https://".
SWARM_HOST="http://my-swarm-host"

# SWARM_TOKEN (required)
# The token used when talking to Swarm to offer some security. To
obtain the
# value, log in to Swarm as a super user and select 'About Swarm' to
see the
# token value.
SWARM_TOKEN="MY-UUID-STYLE-TOKEN"

# ADMIN_USER (optional) Do not use if the Workflow technology preview
feature is enabled:
# For enforcing reviewed changes, optionally specify the normal
Perforce user
# with admin privileges (to read keys); if not set, will use whatever
Perforce
# user is set in environment.
ADMIN_USER=

# ADMIN_TICKET_FILE (optional) Do not use if the Workflow technology
```

```
preview feature is enabled:
# For enforcing reviewed changes, optionally specify the location of
the
# p4tickets file if different from the default ($HOME/.p4tickets).
# Ensure this user is a member of a group with an 'unlimited' or very
long
# timeout; then, manually login as this user from the Perforce server
machine to
# set the ticket.
ADMIN_TICKET_FILE=

# VERIFY_SSL (optional)
# If HTTPS is being used on the Swarm web server, then this controls
whether
# the SSL certificate is validated or not. By default this is set to
1, which
# means any SSL certificates must be valid. If the web server is
using a self
# signed certificate, then this must be set to 0.
VERIFY_SSL=1
```

Modify the **swarm-trigger.conf** configuration file to set the **SWARM_HOST** and the **SWARM_TOKEN** variables appropriately.

Note**Windows only:**

You may need to edit the trigger script to specify the full path to **curl.exe** if the **HTTP::Tiny** module is not installed.

Note**Linux only:**

swarm-trigger.pl looks for configuration in the following files. Variables defined in the later files will override the earlier defined variables of the same name:

- Variables set inside the **swarm-trigger.pl** script itself
- **/etc/perforce/swarm-trigger.conf**

- `/opt/perforce/etc/swarm-trigger.conf`
- The `swarm-trigger.conf` file stored in the same directory as `swarm-trigger.pl`
- Any file passed to the `swarm-trigger.pl` script using the `-c` command line argument

Important

Windows and Linux:

If you specify `ADMIN_USER`, the ticket contained in `%USERPROFILE%/p4tickets.txt` (Windows), `$HOME/.p4tickets` (Linux), or the optional ticket file specified with the `ADMIN_TICKET_FILE` must use the port that was used to start Helix Server. For example, if `p4d` is started with:

```
C:\> p4d -p my-helix-core-server:1666 ...
```

then the ticket for the admin user specified with `ADMIN_USER` should be established with:

```
C:\> p4 -p my-helix-core-server:1666 -u admin_userid login
```

If the ticket was established using the wrong port, the error message you encounter includes the port that the trigger is attempting to use:

```
'swarm.strict.1' validation failed: Invalid login credentials to
[port] within this trigger script; please contact your
administrator.
```

4. **Linux only:** Ensure that the script has execute permissions.

Important

Skip this step if you have committed the script to the Helix Server.

```
$ chmod +x /path/to/swarm-trigger.pl
```

5. Verify that the trigger script executes correctly.

- **For Windows:**

Run:

```
C:\> perl "C:\path\to\swarm-trigger.pl" -t ping -v 0
```


Use the full path to `perl` if it is not available in your command path.

You should expect to see no output. If the trigger is misconfigured, such as using an invalid [trigger token](#), you would see an error.

Warning

Only if using Curl:

Installation of the triggers may cause a security warning dialog to appear when `curl.exe` executes:

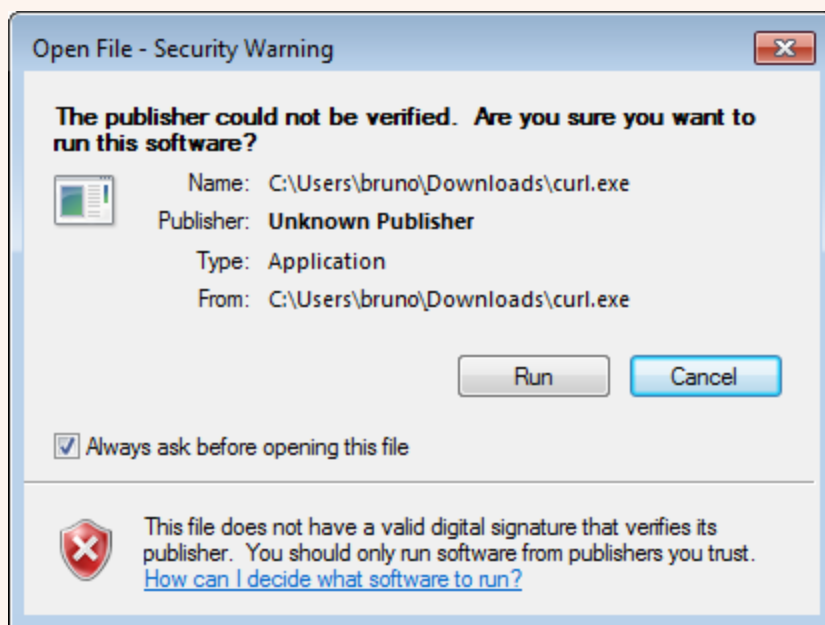

If this occurs, the triggers hang, creating zombie Perl processes. Due to the way triggers are invoked by Helix Server, the dialog is normally not visible even though Windows is waiting on interaction.

To resolve this:

- a. Clear the **Always ask before opening this file** check box and click **Run**.
- b. Right-click `curl.exe`, select **Properties**, and click **Unblock**.

- **For Linux:**

Important

Skip this step if you have committed the script to the Helix Server.

```
$ /path/to/swarm-trigger.pl -t ping -v 0
```

You should expect to see no output. If the trigger is misconfigured, such as using an invalid [trigger token](#), you would see an error.

Note

Run the trigger script without any arguments to see additional usage information.

- Update the Helix Server triggers table to run the trigger script.

Important

- The `swarm.shelvedel shelve-delete` trigger line was added to Swarm in version 2018.1 and later. Add the `swarm.shelvedel shelve-delete` trigger line to the Helix Server trigger table if it is not already present.

- Workflow technology preview feature:** If the [workflow technology preview feature is disabled](#) these trigger lines must be commented out:

The `swarm.enforce change-submit`, `swarm.strict change-content`, and `swarm.shelvesub shelve-submit` trigger lines were added to support workflow for Swarm 2018.2 and later. If workflow is enabled, add the `swarm.enforce change-submit`, `swarm.strict change-content`, and `swarm.shelvesub shelve-submit` trigger lines to the Helix Server trigger table if they are not already present.

Tip

The trigger script can provide the list of trigger lines that should work, with little to no adjustment, by executing it with the `-o` option:

Windows

```
C:\> perl "C:\path\to\swarm-trigger.pl" -o
```

Linux

```
$ /path/to/swarm-trigger.pl -o
```

As a Helix Server user with *super* privileges, edit the Helix Server trigger table by running the `p4 triggers` command and add the following lines (including the initial tab character). Update the `perl.exe`, trigger script, and configuration file paths in each line below to reflect the actual paths on your Helix Server:

Warning

Windows and Linux:

Workflow technology preview feature [disabled](#) (default):

- The `swarm.enforce.1`, `swarm.enforce.2`, `swarm.strict.1`, and `swarm.strict.2` trigger lines are commented out because they are optional. They require that the `DEPOT_PATH1` and `DEPOT_PATH2` values are configured appropriately.

- The first two lines configure the **enforce** feature, which rejects any submitted changes that are not tied to an approved review.
 - The second two lines configure the **strict** feature, which rejects any submitted changes when the contents of the changelist do not match the contents of its associated approved review.
- If you need to apply **enforce** or **strict** to more depot paths, copy the lines and tweak the depot paths as necessary.
 - The **swarm.enforce**, **swarm.strict**, and **swarm.shelvesub** triggers must be commented out when workflow is disabled.

Workflow technology preview feature enabled:

- The **swarm.enforce**, **swarm.strict**, and **swarm.shelvesub** triggers must be used and the **#s** must be removed when workflow is enabled.
- The **swarm.enforce.1**, **swarm.enforce.2**, **swarm.strict.1**, and **swarm.strict.2** trigger lines must be commented out when workflow is enabled.

Note

The `%quote%c:\path\to\perl.exe%quote%` entry is only required for Windows-hosted systems.

- a. If you have committed both the trigger script and the configuration file to the Helix Server:

```

    swarm.job          form-commit    job
"%quote%c:\path\to\perl.exe%quote%" %//.swarm/triggers/swarm-
trigger.pl% -c %//.swarm/triggers/swarm-trigger.conf% -t job
-v %formname%"
    swarm.user        form-commit    user
"%quote%c:\path\to\perl.exe%quote%" %//.swarm/triggers/swarm-
trigger.pl% -c %//.swarm/triggers/swarm-trigger.conf% -t user
-v %formname%"
    swarm.userdel     form-delete    user
"%quote%c:\path\to\perl.exe%quote%" %//.swarm/triggers/swarm-
trigger.pl% -c %//.swarm/triggers/swarm-trigger.conf% -t userdel
-v %formname%"
    swarm.group       form-commit    group
"%quote%c:\path\to\perl.exe%quote%" %//.swarm/triggers/swarm-
trigger.pl% -c %//.swarm/triggers/swarm-trigger.conf% -t group

```

```

-v %formname%"
    swarm.groupdel    form-delete    group
"%quote%c:\path\to\perl.exe%quote% %//.swarm/triggers/swarm-
trigger.pl% -c %//.swarm/triggers/swarm-trigger.conf% -t groupdel
-v %formname%"
    swarm.changesave form-save      change
"%quote%c:\path\to\perl.exe%quote% %//.swarm/triggers/swarm-
trigger.pl% -c %//.swarm/triggers/swarm-trigger.conf% -t
changesave -v %formname%"
    swarm.shelve     shelve-commit //...
"%quote%c:\path\to\perl.exe%quote% %//.swarm/triggers/swarm-
trigger.pl% -c %//.swarm/triggers/swarm-trigger.conf% -t shelve
-v %change%"
    swarm.commit     change-commit //...
"%quote%c:\path\to\perl.exe%quote% %//.swarm/triggers/swarm-
trigger.pl% -c %//.swarm/triggers/swarm-trigger.conf% -t commit
-v %change%"
    swarm.shelvedel  shelve-delete //...
"%quote%c:\path\to\perl.exe%quote% %//.swarm/triggers/swarm-
trigger.pl% -c %//.swarm/triggers/swarm-trigger.conf% -t
shelvedel -v %change% -w %client% -u %user% -d
%quote%%clientcwd%quote% -a %quote%%argsQuoted%quote% -s
%quote%%serverVersion%quote%"
#     The following triggers are only used to prevent a commit
without an approved review.
#     See the Swarm trigger documentation before enabling these.
#     They should be commented out if workflow is enabled.
#     swarm.enforce.1 change-submit //DEPOT_PATH1/...
"%c:\path\to\perl.exe% %//.swarm/triggers/swarm-trigger.pl% -c
%//.swarm/triggers/swarm-trigger.conf% -t enforce -v %change% -p
%serverport%"
#     swarm.enforce.2 change-submit //DEPOT_PATH2/...
"%c:\path\to\perl.exe% %//.swarm/triggers/swarm-trigger.pl% -c
%//.swarm/triggers/swarm-trigger.conf% -t enforce -v %change% -p

```

```

%serverport%"
#       swarm.strict.1  change-content //DEPOT_PATH1/...
"%c:\path\to\perl.exe% %//.swarm/triggers/swarm-trigger.pl% -c
%//.swarm/triggers/swarm-trigger.conf% -t strict -v %change% -p
%serverport%"
#       swarm.strict.2  change-content //DEPOT_PATH2/...
"%c:\path\to\perl.exe% %//.swarm/triggers/swarm-trigger.pl% -c
%//.swarm/triggers/swarm-trigger.conf% -t strict -v %change% -p
%serverport%"
#       The swarm.enforce, swarm.strict, and swarm.shelvesub triggers
below must be used when the Workflow
#       technical preview feature is enabled. The enforce and strict
triggers above must be commented out
#       if the Workflow feature is enabled.
#       swarm.enforce    change-submit //...
"%quote%c:\path\to\perl.exe%quote% %//.swarm/triggers/swarm-
trigger.pl% -c %//.swarm/triggers/swarm-trigger.conf% -t
checkenforced -v %change% -u %user%"
#       swarm.strict    change-content //...
"%quote%c:\path\to\perl.exe%quote% %//.swarm/triggers/swarm-
trigger.pl% -c %//.swarm/triggers/swarm-trigger.conf% -t
checkstrict  -v %change% -u %user%"
#       swarm.shelvesub shelve-submit //...
"%quote%c:\path\to\perl.exe%quote% %//.swarm/triggers/swarm-
trigger.pl% -c %//.swarm/triggers/swarm-trigger.conf% -t
checkshelve  -v %change% -u %user%"

```

- b. If you have copied the trigger script and configuration file to common paths on all servers:

```
swarm.job          form-commit   job
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
job          -v %formname%"
swarm.user         form-commit   user
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
user          -v %formname%"
swarm.userdel     form-delete   user
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
userdel      -v %formname%"
swarm.group       form-commit   group
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
group        -v %formname%"
swarm.groupdel    form-delete   group
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
groupdel     -v %formname%"
swarm.changesave  form-save     change
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
changesave   -v %formname%"
swarm.shelve      shelve-commit //...
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
shelve       -v %change%"
swarm.commit      change-commit //...
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
commit       -v %change%"
swarm.shelvedel   shelve-delete //...
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
```

```

trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
shelvedel -v %change% -w %client% -u %user% -d
%quote%%clientcwd%quote% -a %quote%%argsQuoted%quote% -s
%quote%%serverVersion%quote%"
#       The following triggers are only used to prevent a commit
without an approved review.
#       See the Swarm trigger documentation before enabling these.
#       They should be commented out if workflow is enabled.
#       swarm.enforce.1 change-submit //DEPOT_PATH1/...
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
enforce -v %change% -p %serverport%"
#       swarm.enforce.2 change-submit //DEPOT_PATH2/...
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
enforce -v %change% -p %serverport%"
#       swarm.strict.1 change-content //DEPOT_PATH1/...
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
strict -v %change% -p %serverport%"
#       swarm.strict.2 change-content //DEPOT_PATH2/...
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
strict -v %change% -p %serverport%"
#       The swarm.enforce, swarm.strict, and swarm.shelvesub triggers
below must be used when the Workflow
#       technical preview feature is enabled. The enforce and strict
triggers above must be commented out
#       if the Workflow feature is enabled.
#       swarm.enforce change-submit //...
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t
checkenforced -v %change% -u %user%"
#       swarm.strict change-content //...

```

```
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-  
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t  
checkstrict -v %change% -u %user%"  
#      swarm.shelvesub shelve-submit //...  
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-  
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote% -t  
checkshelve -v %change% -u %user%"
```


Warning
Windows and Linux:

The use of `%quote%` is not supported on 2010.2 servers (it is harmless though); if you are using this version, ensure that you do not have any spaces in the path to `perl.exe` or the script's path.

Important
Windows and Linux:

If your Helix Server has SSL enabled and is older than the 2014.1 release, the `%serverport%` trigger variable does not include the necessary transport indicator, which can cause the `enforce` and `strict` triggers to fail.

To solve this problem, add `ssl:` immediately before `%serverport%` in the trigger lines. For example:

```
#       The following triggers are only used to prevent a commit
without an approved review.
#       See the Swarm trigger documentation before enabling these.
#       They should be commented out if workflow is enabled.
#       swarm.enforce.1 change-submit //DEPOT_PATH1/...
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote%
-t enforce -v %change% -p ssl:%serverport%"
#       swarm.enforce.2 change-submit //DEPOT_PATH2/...
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote%
-t enforce -v %change% -p ssl:%serverport%"
#       swarm.strict.1  change-content //DEPOT_PATH1/...
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote%
-t strict -v %change% -p ssl:%serverport%"
#       swarm.strict.2  change-content //DEPOT_PATH2/...
"%quote%C:\path\to\perl.exe%quote% %quote%/path/to/swarm-
trigger.pl%quote% -c %quote%/path/to/swarm-trigger.conf%quote%
-t strict -v %change% -p ssl:%serverport%"
```

7. Configure the Helix Server to promote all shelved changes.

When this configurable is set, Swarm has access to all shelved changelists, which is a requirement for pre-commit reviews. When it is not set, users connected to an edge server must remember to use the `-p` option when shelving files to promote their shelves to the commit server when initiating a pre-commit review.

Windows:

```
C:\> p4 configure set dm.shelve.promote=1
```

Linux:

```
$ p4 configure set dm.shelve.promote=1
```

8. Optionally forward logins to the commit server.

If you intend to use P4V and its Swarm integration, you should consider forwarding logins to the commit server. See ["P4V Authentication" on page 371](#) for details.

9. You can now configure additional functionality for Swarm:

- **Optional:** Hide Swarm storage from regular users, see ["Hiding Swarm storage from regular users" below](#).
- **Optional:** Handle exclusive locks, see ["Handling Exclusive Locks" on the facing page](#).

10. Depending on your installation type, do one of the following:

- **Swarm package installation:** Review the post-install configuration options to customize your Swarm installation, see ["Post-install configuration options" on page 148](#).
- **Swarm OVA installation:** Review the post-install configuration options to customize your Swarm installation, see ["Post-install configuration options" on page 148](#).
- **Swarm tarball installation:** Set up a recurring task to spawn workers, see ["Set up a recurring task to spawn workers" on the facing page](#).

Hiding Swarm storage from regular users

Swarm information storage uses Helix Server's *keys* facility. By default, users with *list*-level access can search keys and potentially obtain information they would not otherwise have access to, and users with *review*-level access can write or modify keys potentially corrupting or destroying data.

We recommend that you set the `dm.keys.hide` configurable to 2 to require *admin*-level access for searching and modifying keys. Note that `dm.keys.hide` is available in Helix Server versions 2013.1 and newer.

When `dm.keys.hide` is set to 2, both the `p4 keys` and `p4 key` commands require *admin*-level access in the Helix Server. When `dm.keys.hide` is set to 1, only the `p4 keys` command requires *admin*-level access in the Helix Server. When `dm.keys.hide` is set to 1, or is not set, users who know (or can deduce) key names can read values (if they have *list*-level access) or write values (if they have *review*-level access) with the `p4 key` command.

To set `dm.keys.hide`:

```
$ p4 configure set dm.keys.hide=2
```

To confirm the current value of `dm.keys.hide`:

```
$ p4 configure show dm.keys.hide
```

To unset `dm.keys.hide`:

```
$ p4 configure unset dm.keys.hide
```

Handling Exclusive Locks

Swarm takes copies of files when it is creating reviews. Some of the files managed by Helix Server may be limited to 'exclusive open' by having the filetype modifier '+' set. This file-level setting ensures only one user at a time can open the file for editing.

To allow Swarm to work with these 'exclusive open' files, you must enable `filetype.bypasslock` in the Helix Server configuration.

To set `filetype.bypasslock`:

```
$ p4 configure set filetype.bypasslock=1
```

To confirm the current value of `filetype.bypasslock`:

```
$ p4 configure show filetype.bypasslock
```

To unset `filetype.bypasslock`:

```
$ p4 configure unset filetype.bypasslock
```

If this setting is not enabled in Helix Server, Swarm will report exceptions when working with exclusively opened files similar to "Cannot unshelve review (x). One or more files are exclusively open", and noting that you must have the `filetype.bypasslock` configurable enabled.

Set up a recurring task to spawn workers

To ensure that incoming Helix Server events are automatically processed by Swarm, it is important to set up a cron job to do this. The cron job can be installed on any host, although you may want to place this on the Swarm host.

Install curl or wget

You must install either `curl` or `wget` to run the recurring task that spawns the Swarm workers:

- To install `curl`, see "Install curl" below.
- To install `wget`, see "Install wget" on page 145.

Install curl

<https://curl.haxx.se/download.html>

Note

For Windows, `curl.exe` depends on `MSVCR100.dll`. You can get a copy by installing the **Microsoft Visual C++ Redistributable Package**, available for:

- 32-bit systems: <https://www.microsoft.com/download/en/details.aspx?id=5555>
- 64-bit systems: <https://www.microsoft.com/download/en/details.aspx?id=14632>

If you install Swarm with HTTPS, `curl.exe` requires recent CA certificates (or HTTPS connections silently fail). You can get a copy of the `cacert.pem` from:

<https://curl.haxx.se/docs/caextract.html>

Once downloaded, copy `cacert.pem` to the same folder where you installed `curl.exe`, and rename it to `curl-ca-bundle.crt`.

Warning

If `curl` (or `curl.exe` on Windows) cannot execute as expected, trigger execution may block or fail. For example, if `MSVCR100.dll` is missing from a Windows system, invoking `curl.exe` causes a dialog to appear.

Prior to configuring the [triggers](#), verify that `curl` executes. On Linux systems, run:

```
$ curl -h
```

On Windows systems, run:

```
C:\> curl.exe -h
```

The start of the output should be similar to:

```
Usage: curl [options...] <url>
Options: (H) means HTTP/HTTPS only, (F) means FTP only
  --anyauth          Pick "any" authentication method (H)
-a, --append        Append to target file when uploading (F/SFTP)
  --cacert FILE      CA certificate to verify peer against (SSL)
  --capath DIR       CA directory to verify peer against (SSL)
...[truncated for brevity]...
```

For a more thorough test that actually fetches content over a network, try the following test:

- For Linux systems, run:

```
$ curl https://www.perforce.com/
```

- For Windows systems, run:

```
C:\> curl.exe https://www.perforce.com/
```

The output should look like HTML.

Install wget

<https://ftp.gnu.org/gnu/wget/>

<http://gnuwin32.sourceforge.net/packages/wget.htm> (for Windows)

Note

If you are using Powershell on Windows systems, be aware that Powershell includes aliases for `curl` and `wget` that call the Powershell command `Invoke-WebRequest` instead of `curl.exe` or `wget.exe`. `Invoke-WebRequest` has different command-line options than either `curl` or `wget`, which can be confusing.

If you want to remove the built-in aliases for `curl` and `wget` from Powershell, follow these steps:

1. Create a Powershell profile (only if you have not already done so):

```
PS C:\> New-Item $profile -force -itemtype file
```

2. Edit your profile:

```
PS C:\> notepad $profile
```

3. Add the following line to your profile:

```
remove-item alias:curl  
remove-item alias:wget
```

4. Save the profile and close `notepad`.

5. Reload your profile:

```
PS C:\> . $profile
```

Verify that curl or wget is installed

Warning

`curl` or `wget` must be installed or workers do not spawn and Swarm cannot process any events.

Verify that curl or wget is installed:

1. Use the `which` command.

For example to verify that `curl` is installed:

```
$ which curl
```

2. If you see any output, the referenced command is installed.

Create a recurring task to spawn workers

Note

Swarm package installation and Swarm OVA installation:

- The `swarm-cron-hosts.conf`, and `swarm-cron.sh` files are automatically created with the correct content including the correct URL for Swarm. They do not need to be edited.
- If you want to run Swarm in a sub-folder of an existing website, or with a custom port, the `swarm-cron-host.conf` file must be edited. For instructions on how to configure Swarm to run in a sub-folder, or with a custom port, see [Run Swarm in a sub-folder of an existing web site](#), or [Run Swarm's virtual host on a custom port](#).

swarm-cron.sh script

The `swarm-cron.sh` file in `/opt/perforce/swarm/p4-bin/scripts` ensures that a worker is fired up every minute.

By default, the `DEFAULT_CONFIG_FILE=` configuration line is set to `/opt/perforce/etc/swarm-cron-hosts.conf`. The `swarm-cron.sh` script takes the Swarm hostname from the `swarm-cron-hosts.conf` file.

The `swarm-cron.sh` script contains the correct content for Swarm installations using `wget`, or `curl`.

Tip

You must leave the `wget`, and `curl` configuration lines in the script. The script is written so that it can be used with Swarm installations that use `wget`, and Swarm installations that use `curl`. The `wget` configuration line is tried first, if that fails the `curl` configuration line is tried.

- `wget` configuration line for HTTP, and HTTPS:

```
wget --quiet --no-check-certificate --output-document /dev/null --  
timeout 5 "${SWARM_HOST}/queue/worker"
```

- `curl` configuration line for HTTP, and HTTPS:

```
curl --silent --insecure --output /dev/null --max-time 5 "${SWARM_  
HOST}/queue/worker"
```

In the `wget` and `curl` configuration lines above, where you see `--timeout 5` or `--max-time 5`, the `5` is the number of seconds that the cron task will wait for a response from the Swarm host. When the cron task is installed on the Swarm host, such as in the Swarm OVA, that value could be reduced to `1` second (e.g. `--timeout 1` or `--max-time 1`).

Note

If you configure Swarm to use HTTPS, and you install a self-signed certificate, the cron jobs avoid the certificate validity test which could cause silent failures to process events. The command to avoid the certificate validity test is included by default for `wget`, and `curl`:

- `wget` command: `--no-check-certificate`
- `curl` command: `--insecure`

If you have configured an HTTP connection to Swarm, the avoid validity check command is ignored.

swarm-cron-hosts.conf configuration file

The `swarm-cron-hosts.conf` file in `/opt/perforce/etc` specifies the connection type (HTTP or HTTPS), hostname, and port number for Swarm cron jobs.

1. Edit the `swarm-cron-hosts.conf` file so that it contains the actual Swarm hostname, and port you have configured for Swarm (which may include a [sub-folder](#) or a [custom port](#)). The following format is used:

```
[http[s]://]<swarm-host>[:<port>]
```

Default if value not specified:


- `[http[s]://]` http
 - `<swarm-host>` must be specified
 - `:<port>` 80
2. Save the edited file.

Tip

To check or modify Swarm worker configuration, see ["Workers" on page 443](#).

Note

If the recurring task is disabled, or stops functioning for any reason, logged-in users see the following error message when Swarm detects that no workers are running:



Hmm... no queue workers? Ask your administrator to check the [worker setup](#).

3. Review the post-install configuration options to customize your Swarm installation, see "[Post-install configuration options](#)" below.

Post-install configuration options

There are a few options for customizing your Swarm installation's operation. This section covers the options that are officially supported:

- "[HTTPS](#)" on the facing page
- "[Run Swarm in a sub-folder of an existing web site](#)" on page 155
- "[Run Swarm's virtual host on a custom port](#)" on page 157

If you do not need to customize your Swarm installation, you are all set to start using Swarm, enjoy!

Tip

To get started with Swarm, see the "[Quickstart](#)" on page 24 chapter.

Back up your Swarm virtual host first

Before undertaking any of the following customization options, ensure that you have backed up your Swarm virtual host configuration. Choose the most appropriate option:

- If your Apache configuration directory contains the directories `sites-available` and `sites-enabled`:

```
$ cd /path/to/apache/configuration/..
$ cp -a sites-available sites-available.bak
```

Important

If the `sites-enabled` directory contains files, and not just symbolic links, you need to backup this folder as well:

```
$ cd /path/to/apache/configuration/..
$ cp -a sites-enabled sites-enabled.bak
```

- For CentOS/RHEL systems, if you used the [Swarm packages](#) to install Swarm:

```
$ cd /path/to/apache/configuration/..
$ cp -a conf.d conf.d.bak
```

- Otherwise, back up your Apache configuration.

HTTPS

Important

Back up your Swarm virtual host configuration before customizing your Swarm installation, see "[Back up your Swarm virtual host first](#)" on the previous page.

This section describes how to make your Swarm installation more secure by using HTTPS.

Before you begin the following procedure, locate your system's Apache configuration. Common configuration directories include:

- `/etc/httpd/conf/`
- `/etc/apache2/`
- `/Applications/XAMPP/etc/`

Within the Apache configuration path, the main Apache configuration file is usually named one of the following:

- `httpd.conf`
- `apache2.conf`

A longer discussion on the possible locations and names of Apache configuration files is available here: <https://wiki.apache.org/httpd/DistrosDefaultLayout>

1. Enable SSL in Apache.

If the Apache utility `a2enmod` is installed:

```
$ sudo a2enmod ssl
```

Without the `a2enmod` utility, edit the Apache configuration file by hand. Locate your Apache configuration file for modules and either uncomment or add the following lines:

```
LoadModule ssl_module libexec/apache2/mod_ssl.so
```

2. Create a directory to store certificates.

```
$ sudo mkdir -p /etc/apache2/ssl
```

3. Create a certificate/key pair.

```
$ cd /etc/apache2/ssl
$ sudo openssl req -x509 -nodes -days 365 -newkey rsa:2048 -
keyout apache.key -out apache.crt
```

This command generates a private key and a certificate. To form the certificate, `openssl` prompts you for several details:

```
Generating a 2048 bit RSA private key
.....+++
.....+++
writing new private key to 'apache.key'
-----
You are about to be asked to enter information that will be
incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or
a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
-----
Country Name (2 letter code) [AU]:CA
State or Province Name (full name) [Some-State]:British Columbia
Locality Name (eg, city) []:Victoria
Organization Name (eg, company) [Internet Widgits Pty Ltd]:Perforce
Software
Organizational Unit Name (eg, section) []:Swarm development team
Common Name (e.g. server FQDN or YOUR name) []:myswarm.host
Email Address []:admin@myswarm.host
```

The output above includes some example details. You should replace anything in italics with your own details. Since the certificate request details that can help users determine whether your certificate is valid, enter legitimate information whenever possible.

Important

The Common Name field must match the hostname for your Swarm installation exactly.

4. Secure the certificate directory.

```
$ sudo chmod 600 /etc/apache2/ssl
```

5. Edit the virtual host configuration.

Note

The virtual host configuration should be in the file you [backed up initially](#).

- For Apache 2.2, edit the virtual host configuration to match:

```
<VirtualHost *:80>
    ServerName myswarm.host
    ServerAlias myswarm
    ErrorLog "/path/to/apache/logs/myswarm.error_log"
    CustomLog "/path/to/apache/logs/myswarm.access_log" common
    DocumentRoot "/path/to/swarm/public"
    <Directory "/path/to/swarm/public">
        AllowOverride All
        Require all granted
    </Directory>

    Redirect permanent / https://myswarm.host
</VirtualHost>

<VirtualHost *:443>
    SSLEngine on
    SSLCertificateFile /etc/apache2/ssl/apache.crt
    SSLCertificateKeyFile /etc/apache2/ssl/apache.key

    ServerName myswarm.host
    ServerAlias myswarm
    ErrorLog "/path/to/apache/logs/myswarm.error_log"
    CustomLog "/path/to/apache/logs/myswarm.access_log" common
    DocumentRoot "/path/to/swarm/public"
    <Directory "/path/to/swarm/public">
        AllowOverride All
        Order allow,deny
        Allow from all
    </Directory>
</VirtualHost>
```

```
    </Directory>
</VirtualHost>
```

- For Apache 2.4, edit the virtual host configuration to match:

```
<VirtualHost *:80>
    ServerName myswarm
    ServerAlias myswarm.host
    ErrorLog "/path/to/apache/logs/myswarm.error_log"
    CustomLog "/path/to/apache/logs/myswarm.access_log" common
    DocumentRoot "/path/to/swarm/public"
    <Directory "/path/to/swarm/public">
        AllowOverride All
        Require all granted
    </Directory>
</VirtualHost>

<VirtualHost *:443>
    SSLEngine on
    SSLCertificateFile /etc/apache2/ssl/apache.crt
    SSLCertificateKeyFile /etc/apache2/ssl/apache.key

    ServerName myswarm.host
    ServerAlias myswarm
    ErrorLog "/path/to/apache/logs/myswarm.error_log"
    CustomLog "/path/to/apache/logs/myswarm.access_log" common
    DocumentRoot "/path/to/swarm/public"
    <Directory "/path/to/swarm/public">
        AllowOverride All
        Require all granted
    </Directory>
</VirtualHost>
```

See Apache's virtual host documentation for details:

<https://httpd.apache.org/docs/2.2/vhosts/>

<https://httpd.apache.org/docs/2.4/vhosts/>

6. Customize the virtual host definition.
 - a. Replace `myswarm.host` with the hostname for Swarm on your network.
 - b. Replace `myswarm` with the name of the subdomain hosting Swarm. Many administrators choose `swarm`.

Note

The string `myswarm` in the log file paths: this should match the subdomain name and prefix for the log files, to help coordinate the active host with the log files for that host. Doing this is particularly useful when your Apache server hosts multiple instances of Swarm.

- c. Replace `/path/to/apache/logs` with the path where your Apache store its log files. Apache's log files are typically named `access_log` and `error_log`.
 - d. Replace `/path/to/swarm` with the path to the Swarm directory.
7. Restart your web server.

```
$ sudo apachectl restart
```

8. Adjust your firewall configuration to allow connections to the standard SSL port for web servers.

- For CentOS/RHEL 6.6+:

```
$ sudo lokkit -p 443:tcp
```

- For CentOS/RHEL 7+:

```
$ sudo firewall-cmd --zone=public --add-port=443/tcp --permanent
$ sudo systemctl reload firewalld
```

- For other distributions, consult with your network administrator or operating system documentation to determine how to adjust your firewall configuration.

9. Test your HTTPS URL from a web browser.

Important

If the `myswarm.host` value in the virtual host configuration and the certificate do not match, the P4V integration with Swarm fails with the message `SSL handshake failed`.

Also, when a reverse DNS lookup is performed, `myswarm.host` should be the answer when querying for the Swarm server's IP address.

10. You are now all set to start using Swarm, enjoy!

Tip

To get started with Swarm, see the ["Quickstart" on page 24](#) chapter.

Run Swarm in a sub-folder of an existing web site

Important

Back up your Swarm virtual host configuration before customizing your Swarm installation, see ["Back up your Swarm virtual host first" on page 148](#).

If you cannot run Swarm in its own virtual host, which might be necessary when you do not control the hostname to be used with Swarm, installing Swarm in a sub-folder of an existing virtual host configuration can be a good solution.

Installing Swarm in a sub-folder requires modification of the previous installation steps covered in this chapter:

- The ["Apache configuration" on page 114](#) is entirely different; instead of establishing a new virtual host, you need to [modify an existing virtual host configuration](#). Often, this would be Apache's default site.
- [Swarm's configuration file](#) requires an [extra item](#).

The following sections cover the specifics of sub-folder installation.

See ["base_url" on page 386](#) for more details.

Important

If you used the [Swarm OVA](#) or [Swarm packages](#) to install Swarm, you can adjust Swarm's configuration using the package configuration script `/opt/perforce/swarm/sbin/configure-swarm.sh`.

`configure-swarm.sh` does not read any existing Swarm configuration; you must provide all of the configuration details each time you execute `configure-swarm.sh`:

```
$ sudo /opt/perforce/swarm/sbin/configure-swarm.sh -n -p myp4host:1666  
-u swarm -w password -e mx.example.com -H myhost -B /swarm
```

In the example above, the `-B` option is used to specify the name of the sub-folder.

If you use `configure-swarm.sh` to adjust the Swarm configuration, you only need to follow the ["Apache configuration" on the next page](#) steps described below; all of the changes listed in the ["Swarm configuration" on page 157](#) section below have been completed by `configure-swarm.sh`.

Apache configuration

1. Ensure that the `SWARM_ROOT` is not within the document root of the intended virtual host.

This step ensures that Swarm's source code and configuration is impossible to browse, preventing access to important details such as stored credentials, and active sessions and workspaces.

2. Adjust the virtual host configuration that you are already using.

Note

Depending on the method used to install Swarm, the filename for virtual host configuration you need to edit is:

- For [Swarm OVA](#) or [Swarm package](#) installations, edit `perforce-swarm-site.conf`.
- For manual installations following Swarm's recommended "Apache configuration" on [page 114](#) edit `swarm`.
- For other installations, you may have to edit `httpd.conf` or nearby files.

- For Apache 2.2, add the following lines to the virtual host definition:

```
Alias /swarm SWARM_ROOT/public

<Directory "SWARM_ROOT/public">
  AllowOverride All
  Order allow,deny
  Allow from All
</Directory>
```

- For Apache 2.4, add the following lines to the virtual host definition:

```
Alias /swarm SWARM_ROOT/public

<Directory "SWARM_ROOT/public">
  AllowOverride All
  Require all granted
</Directory>
```

The `Alias` line configures Apache to respond to requests to `https://myhost/swarm` with content from Swarm's `public` folder. You can change the `/swarm` portion of the `Alias` line to anything you want.

The `<Directory>` block grants access to everything within Swarm's `public` folder. Replace `SWARM_ROOT` with the actual path to Swarm.

- Restart your web server.

```
$ sudo apachectl restart
```

Swarm configuration

To successfully operate within a sub-folder, the `"swarm_root"` on [page 430/data/config.php](#) file needs to be adjusted to contain the following lines (as a peer of the `p4` item):

```
'environment' => array(
    'base_url' => '/swarm'
),
```

Ensure that `/swarm` matches the first item in the `Alias` line in the virtual host configuration.

See ["Environment" on page 384](#) for more details.

Cron configuration

Swarm's [recurring task](#) configuration must be updated to reflect the sub-folder that you have configured in [Apache's](#) and [Swarm's](#) configurations. This is configured in the `swarm-cron-hosts.conf` file.

- Edit `/opt/perforce/etc/swarm-cron-hosts.conf`.
- Replace:

```
https://swarm-host
```

with:

```
https://swarm-host/swarm/
```

Where `swarm-host` is the hostname of your Swarm installation, and `swarm` is the sub-folder you want to use.

- Save the edited file.
New workers should be started at the start of the next minute.
- You are now all set to start using Swarm, enjoy!

Tip

To get started with Swarm, see the ["Quickstart" on page 24](#) chapter.

Run Swarm's virtual host on a custom port

Important

Back up your Swarm virtual host configuration before customizing your Swarm installation, see ["Back](#)

up your Swarm virtual host first" on page 148.

If you cannot run Swarm on port 80 (or port 443 for HTTPS), perhaps because you do not have root access, it is possible to run Swarm on a custom port.

Installing Swarm to use a custom port requires modification of the previous installation steps covered in this chapter: The [Apache configuration](#) is slightly different, requiring [modification of Swarm's virtual host definition](#).

The following section covers the specifics of the custom port configuration.

Note

In addition to the following instructions, you may also need to apply the `external_url` item described in the ["Environment" on page 384](#) section if your Swarm is behind a proxy, or you have multiple Swarm instances connected to Helix Server.

Important

If you used the [Swarm OVA](#) or [Swarm packages](#) to install Swarm, you can adjust Swarm's configuration using the package configuration script `/opt/perforce/swarm/sbin/configure-swarm.sh`.

`configure-swarm.sh` does not read any existing Swarm configuration; you must provide all of the configuration details each time you execute `configure-swarm.sh`:

```
$ sudo /opt/perforce/swarm/sbin/configure-swarm.sh -n -p  
myp4host:1666 -u swarm -w password -e mx.example.com -H myhost  
-P 8080
```

In the example above, the `-P` option is used to specify the custom port that Swarm should use.

If you use `configure-swarm.sh` to adjust Swarm's configuration, follow the additional steps that it describes. Once those steps are complete, do not perform any of the steps described below.

Apache configuration

1. Edit the virtual host configuration.

Note

Depending on the method used to install Swarm, the filename for virtual host configuration you need to edit is:

- For [Swarm OVA](#) or [Swarm package](#) installations, edit `perforce-swarm-site.conf`.

- For manual installations following Swarm's [recommended Apache configuration](#), edit **swarm**.
- For other installations, you may have to edit **httpd.conf** or nearby files.

- a. Add the following line *outside* of the `<VirtualHost>` block:

```
Listen 8080
```

- b. Edit the `<VirtualHost *:80>` line to read:

```
<VirtualHost *:8080>
```

For both lines, replace **8080** with the custom port you wish to use.

Important

If you choose a port that is already in use, Apache refuses to start.

2. Restart your web server.

```
$ sudo apachectl restart
```

3. Adjust your firewall configuration to allow connections to the custom port.

- For CentOS/RHEL 6.6+:

```
$ sudo lokkit -p 8080:tcp
```

Replace **8080** with the custom port you wish to use.

- For CentOS/RHEL 7+:

```
$ sudo firewall-cmd --zone=public --add-port=8080/tcp --
permanent
```

```
$ sudo systemctl reload firewalld
```

Replace **8080** with the custom port you wish to use.

- For other distributions, consult with your network administrator or operating system documentation to determine how to adjust your firewall configuration.

Cron configuration

Swarm's [recurring task](#) configuration must be updated to reflect the custom port that you have configured in [Apache's](#) configuration. This is configured in the `swarm-cron-hosts.conf` file.

1. Edit `/opt/perforce/etc/swarm-cron-hosts.conf`.
2. Replace:

```
https://swarm-host:80
```

with:

```
https://swarm-host:8080
```

Where `swarm-host` is the hostname of your Swarm installation, and `8080` is the custom port you want to use.

3. Save the edited file.
New workers should be started at the start of the next minute.
4. You are now all set to start using Swarm, enjoy!

Tip

To get started with Swarm, see the ["Quickstart"](#) on page 24 chapter.

Upgrading Swarm

The section covers upgrading Swarm to a newer release.

Tip

If you are not already running Swarm, none of these instructions apply to you. Instead, see the [Swarm installation instructions](#).

Swarm upgrade process:

- If you installed Swarm via a source distribution archive (tar file), see ["Upgrade a Swarm tarball installation"](#) below for details.
- If you installed Swarm via a package, see ["Update a Swarm package installation"](#) on page 166 for details.
- If you installed Swarm via an OVA (Swarm 2014.2 or later), see ["Update a Swarm package installation"](#) on page 166 for details.
- If you installed Swarm via an OVA (Swarm 2014.1 or earlier), see ["Upgrade a Swarm OVA installation from Swarm 2014.1 or earlier"](#) on page 168 for details

Upgrade a Swarm tarball installation

Note

Not recommended: The tarball instructions in this section can be applied to an OVA.

The recommended upgrade process for a Swarm OVA installation is:

- If you installed Swarm via an OVA (Swarm 2014.2 or later), see ["Update a Swarm package installation" on page 166](#) for details.
- If you installed Swarm via an OVA (Swarm 2014.1 or earlier), see ["Upgrade a Swarm OVA installation from Swarm 2014.1 or earlier" on page 168](#) for details

The following process attempts to minimize downtime, but a short period of downtime for Swarm users is unavoidable. There should be no downtime for your Helix Server. After a successful upgrade, all Swarm users are logged out.

If you are using Swarm in a production environment, we encourage you to test this upgrade process in a non-production environment first.

Warning

- P4PHP should be upgraded to the version included in the new Swarm release. If you have already configured PHP to use the Swarm-provided P4PHP ([as recommended](#)), this happens automatically. If you have manually installed P4PHP in some other fashion, upgrade P4PHP before you perform any of the upgrade steps below. See ["PHP configuration" on page 119](#) for details.
- Swarm runtime dependencies change between releases, you must check that your system satisfies the Swarm runtime dependencies before starting the upgrade, see ["Runtime dependencies" on page 81](#).
- Review the Helix Server requirements before you upgrade Swarm, see ["Helix Core Server requirements" on page 84](#).

The steps in this section describe how to upgrade Swarm using the provided archive file. `SWARM_ROOT` refers to the current Swarm installation.

Tip

For OVA installations, `SWARM_ROOT` is `/opt/perforce/swarm`.

1. Download the new TAR file from <https://www.perforce.com/downloads/helix-swarm>.
2. Expand the new `swarm.tgz`:

```
$ tar -zxf swarm.tgz
```

The contents of `swarm.tgz` are expanded into a top-level folder named `swarm-version`, where `version` corresponds to the version downloaded. This directory is identified as `SWARM_NEW` below.

3. Move `SWARM_NEW` to be a peer of `SWARM_ROOT`:

```
$ mv SWARM_NEW SWARM_ROOT/./
```

4. Copy the `SWARM_ROOT/data/config.php` file from `SWARM_ROOT` to `SWARM_NEW`:

```
$ cp -p SWARM_ROOT/data/config.php SWARM_NEW/data/
```

5. Create the queue token directory:

```
$ mkdir SWARM_NEW/data/queue
```

6. Copy the existing trigger token(s):

```
$ sudo cp -pR SWARM_ROOT/data/queue/tokens SWARM_NEW/data/queue/
```

7. Assign correct ownership to the new Swarm's data directory:

```
$ sudo chown -R www-data SWARM_NEW/data
```

Note

The `www-data` user above is an example of what the web server user name might be, and can vary based on distribution or customization. For example, the user is typically `apache` for Red Hat/Fedora/CentOS, `www-data` for Debian/Ubuntu, `wwwrun` for SuSE, `_www` for Mac OSX.

8. Copy the new Swarm trigger script to your Helix Core Server machine. The trigger script is `SWARM_NEW/p4-bin/scripts/swarm-trigger.pl`, and requires installation of Perl 5.08+ (use the latest available) on the Helix Server machine. If Swarm is using SSL, then the triggers also require the `IO::Socket::SSL` Perl module.

Warning

Do not overwrite any existing trigger script at this time. Give the script a new name, for example: `swarm-trigger-new.pl`

9. Configure the Swarm trigger script by creating, in the same directory on the Helix Server machine, **swarm-trigger.conf**. It should contain:

```
# SWARM_HOST (required)
# Hostname of your Swarm instance, with leading "http://" or
"https://".
SWARM_HOST="http://my-swarm-host"

# SWARM_TOKEN (required)
# The token used when talking to Swarm to offer some security. To
obtain the
# value, log in to Swarm as a super user and select 'About Swarm' to
see the
# token value.
SWARM_TOKEN="MY-UUID-STYLE-TOKEN"

# ADMIN_USER (optional) Do not use if the Workflow technology preview
feature is enabled:
# For enforcing reviewed changes, optionally specify the normal
Perforce user
# with admin privileges (to read keys); if not set, will use whatever
Perforce
# user is set in environment.
ADMIN_USER=

# ADMIN_TICKET_FILE (optional) Do not use if the Workflow technology
preview feature is enabled:
# For enforcing reviewed changes, optionally specify the location of
the
# p4tickets file if different from the default ($HOME/.p4tickets).
# Ensure this user is a member of a group with an 'unlimited' or very
long
# timeout; then, manually login as this user from the Perforce server
machine to
# set the ticket.
```

```

ADMIN_TICKET_FILE=

# VERIFY_SSL (optional)
# If HTTPS is being used on the Swarm web server, then this controls
whether
# the SSL certificate is validated or not. By default this is set to
1, which
# means any SSL certificates must be valid. If the web server is
using a self
# signed certificate, then this must be set to 0.
# set the ticket.
VERIFY_SSL=1

```

Fill in the required `SWARM_HOST` and `SWARM_TOKEN` variables with the configuration from any previous Swarm trigger script, typically `swarm-trigger.pl`.

Important

The `SWARM_HOST` and `SWARM_TOKEN` variables must be deleted if the [Workflow Technology preview feature is enabled](#).

Note

Swarm 2015.4 and earlier: Swarm trigger script files were available as shell scripts in these earlier Swarm versions, typically `swarm-trigger.sh`.

When upgrading to Swarm 2016.1 and later the Helix Server machine must be configured to use Perl trigger scripts because the shell trigger scripts are no longer supported and have been removed.

Note

If you already have a `swarm-trigger.conf` file, no additional configuration is required.

- For Linux systems, ensure that the script is executable:

```
$ sudo chmod +x swarm-trigger-new.pl
```

- Rename the new trigger script:

```
$ mv swarm-trigger-new.pl swarm-trigger.pl
```

On Windows:

```
C:\> ren swarm-trigger-new.pl swarm-trigger.pl
```


12. Update the triggers in your Helix Server.

Important

- The `swarm.shelvedel shelve-delete` trigger line was added to Swarm in version 2018.1 and later. Add the `swarm.shelvedel shelve-delete` trigger line to the Helix Server trigger table if it is not already present, see "[Update the Helix Server triggers table to run the trigger script.](#)" on page 134
- **Workflow technology preview feature disabled (default):**
 - The `swarm.enforce change-submit`, `swarm.strict change-content`, and `swarm.shelvesub shelve-submit` trigger lines must be commented out if workflow is disabled, see "[Update the Helix Server triggers table to run the trigger script.](#)" on page 134
- **Workflow technology preview feature enabled:**
 - The `swarm.enforce.1`, `swarm.enforce.2`, `swarm.strict.1`, and `swarm.strict.2` trigger lines must be commented out when workflow is enabled, see "[Update the Helix Server triggers table to run the trigger script.](#)" on page 134
 - The `swarm.enforce change-submit`, `swarm.strict change-content`, and `swarm.shelvesub shelve-submit` trigger lines were added to support workflow for Swarm 2018.2 and later. If workflow is enabled, add the `swarm.enforce change-submit`, `swarm.strict change-content`, and `swarm.shelvesub shelve-submit` trigger lines to the Helix Server trigger table if they are not already present, see "[Update the Helix Server triggers table to run the trigger script.](#)" on page 134
 - The `enforce` and `strict` trigger lines have been replaced with workflow rules in Swarm 2018.2. There are currently some limitations on the workflow rules in comparison to the `enforce` and `strict` triggers, for details see "[Operational options](#)" on page 433.

- a. Run the Swarm trigger script to capture (using **Ctrl+C** on Windows and Linux, **Command+C** on Mac OSX) the trigger lines that should be included in the Perforce trigger table:

```
$ ./swarm-trigger.pl -o
```

On Windows:

```
C:\> path/to/perl swarm-trigger.pl -o
```

- b. As a Perforce user with *super* privileges, update the Perforce trigger table by running **p4 triggers** command and replacing any `swarm.*` lines with the previously captured trigger line output (using **Ctrl+V** on Windows and Linux, **Command+V** on Mac OSX).

Important

If you previously customized the Swarm trigger lines, perhaps to apply various "Trigger options" on page 432, be sure to repeat those customizations within the updated trigger lines.

13. Replace the old Swarm with the new Swarm. **Downtime occurs in this step.**

```
$ sudo apache2ctl stop; mv SWARM_ROOT SWARM.old; mv SWARM_NEW SWARM_ROOT; sudo apache2ctl start
```

Swarm index upgrade

If you are upgrading from Swarm 2017.2 or earlier you should run the index upgrade, this ensures that the review activity history is displayed in the correct order on the [Dashboard](#), and [Reviews list](#) pages.

Note

If you are upgrading from Swarm version 2017.3 or later, the index upgrade step is not required.

The index upgrade process can be configured to suit your Swarm system specifications. See [Upgrade index](#) for details.

Run the upgrade as an *Admin* user by visiting the following URL:

```
http://SWARM-HOST/upgrade
```

All done!

Update a Swarm package installation

Important

For the Swarm 2015.2 release, the packages have been renamed. The following instructions upgrade your Swarm packages to the latest versions.

The following process attempts to minimize downtime, but a short period of downtime for Swarm users is unavoidable. There should be no downtime for your Helix Server. After a successful upgrade, all Swarm users are logged out.

Important

Review the Helix Server requirements before you upgrade Swarm, see "[Helix Core Server requirements](#)" on page 84.

If you are using Swarm in a production environment, we encourage you to test this upgrade process in a non-production environment first.

Run one of the following:

1. For Ubuntu:

```
$ sudo apt-get update
$ sudo apt-get install helix-swarm helix-swarm-triggers helix-swarm-optional
```

2. For CentOS/RHEL (run this command as root):

```
# yum install helix-swarm helix-swarm-triggers helix-swarm-optional
```

Swarm generally has several major updates each year, and may occasionally have a patch update between major updates. To determine whether a Swarm update is available, run one of the following:

1. For Ubuntu:

```
$ sudo apt-get update
$ sudo apt-get -s upgrade | grep swarm
```

2. For CentOS/RHEL (run this command as root):

```
# yum list updates | grep swarm
```

Important

- The `swarm.shelvedel shelve-delete` trigger line was added to Swarm in version 2018.1 and later. Add the `swarm.shelvedel shelve-delete` trigger line to the Helix Server trigger table if it is not already present, see "[Update the Helix Server triggers table to run the trigger script.](#)" on page 134
- **Workflow technology preview feature disabled (default):**
 - The `swarm.enforce change-submit`, `swarm.strict change-content`, and `swarm.shelvesub shelve-submit` trigger lines must be commented out if workflow is disabled, see "[Update the Helix Server triggers table to run the trigger script.](#)" on page 134

■ **Workflow technology preview feature enabled:**

- The `swarm.enforce.1`, `swarm.enforce.2`, `swarm.strict.1`, and `swarm.strict.2` trigger lines must be commented out when workflow is enabled, see " [Update the Helix Server triggers table to run the trigger script.](#)" on page 134
- The `swarm.enforce change-submit`, `swarm.strict change-content`, and `swarm.shelvesub shelve-submit` trigger lines were added to support workflow for Swarm 2018.2 and later. If workflow is enabled, add the `swarm.enforce change-submit`, `swarm.strict change-content`, and `swarm.shelvesub shelve-submit` trigger lines to the Helix Server trigger table if they are not already present, see " [Update the Helix Server triggers table to run the trigger script.](#)" on page 134
- The `enforce` and `strict` trigger lines have been replaced with workflow rules in Swarm 2018.2. There are currently some limitations on the workflow rules in comparison to the `enforce` and `strict` triggers, for details see " [Operational options](#)" on page 433.

Swarm index upgrade

If you are upgrading from Swarm 2017.2 or earlier you should run the index upgrade, this ensures that the review activity history is displayed in the correct order on the [Dashboard](#), and [Reviews list](#) pages.

Note

If you are upgrading from Swarm version 2017.3 or later, the index upgrade step is not required.

The index upgrade process can be configured to suit your Swarm system specifications. See [Upgrade index](#) for details.

Run the upgrade as an *Admin* user by visiting the following URL:

```
http://SWARM-HOST/upgrade
```

All done!

Upgrade a Swarm OVA installation from Swarm 2014.1 or earlier

Note

If you are running the Swarm 2014.2 OVA, or newer, Swarm was installed using system packages and can be upgraded by following the [package update instructions](#).

The following process attempts to minimize downtime, but a short period of downtime for Swarm users is unavoidable. There should be no downtime for your Helix Server. After a successful upgrade, all Swarm users are logged out.

Important

Review the Helix Server requirements before you upgrade Swarm, see "[Helix Core Server requirements](#)" on page 84.

If you are using Swarm in a production environment, we encourage you to test this upgrade process in a non-production environment first.

1. Download the new OVA from <https://www.perforce.com/downloads/helix-swarm>.
2. Follow the [OVA setup steps](#). This provides you with an upgraded Swarm and an updated web hosting environment within the OVA, which can include distribution, web server, PHP, and security updates.

Important

- The `swarm.shelvedel shelve-delete` trigger line was added to Swarm in version 2018.1 and later. Add the `swarm.shelvedel shelve-delete` trigger line to the Helix Server trigger table if it is not already present, see "[Update the Helix Server triggers table to run the trigger script.](#)" on page 134
- **Workflow technology preview feature disabled (default):**
 - The `swarm.enforce change-submit`, `swarm.strict change-content`, and `swarm.shelvesub shelve-submit` trigger lines must be commented out if workflow is disabled, see "[Update the Helix Server triggers table to run the trigger script.](#)" on page 134
- **Workflow technology preview feature enabled:**
 - The `swarm.enforce.1`, `swarm.enforce.2`, `swarm.strict.1`, and `swarm.strict.2` trigger lines must be commented out when workflow is enabled, see "[Update the Helix Server triggers table to run the trigger script.](#)" on page 134
 - The `swarm.enforce change-submit`, `swarm.strict change-content`, and `swarm.shelvesub shelve-submit` trigger lines were added to support workflow for Swarm 2018.2 and later. If workflow is enabled, add the `swarm.enforce change-submit`, `swarm.strict change-content`, and `swarm.shelvesub shelve-submit` trigger lines to the Helix Server trigger table if they are not already present, see "[Update the Helix Server triggers table to run the trigger script.](#)" on page 134
 - The `enforce` and `strict` trigger lines have been replaced with workflow rules in Swarm 2018.2. There are currently some limitations on the workflow rules in comparison to the `enforce` and `strict` triggers, for details see "[Operational options](#)" on page 433.

3. If you have customized the original OVA's Swarm configuration:
 - a. Copy `/opt/perforce/swarm/data/config.php` to the same path in the new OVA.
 - b. Copy all token files in `/opt/perforce/swarm/data/queue/tokens/` to the same path in the new OVA.
4. Shutdown the old OVA.

Swarm index upgrade

If you are upgrading from Swarm 2017.2 or earlier you should run the index upgrade, this ensures that the review activity history is displayed in the correct order on the [Dashboard](#), and [Reviews list](#) pages.

Note

If you are upgrading from Swarm version 2017.3 or later, the index upgrade step is not required.

The index upgrade process can be configured to suit your Swarm system specifications. See [Upgrade index](#) for details.

Run the upgrade as an *Admin* user by visiting the following URL:

```
http://SWARM-HOST/upgrade
```


All done!

5 | Basics

This chapter covers the basic operations provided by Swarm. These include:

Dashboard	171
Activity streams	174
Files	175
Commits	182
Jobs	184
Changelists	188
Diffs	190
Comments	196
Users	211
Groups	220
Projects	223
Workflows - Technology preview feature	229
Notifications	233
Log in/Log out	239
Notable minor features	240
Markdown	244

Dashboard

Your dashboard is available by clicking the **Swarm Home**  icon on the left of the main toolbar. Your dashboard displays a list of reviews that you may need to act on.

Note

Since it is tied to the logged in user, the dashboard is only populated if you are logged in.

Dashboard 9 Activity

Reviews to act on

Reviews you are participating in that need your vote, reviews that you authored that need changes, and reviews on branches where you're a moderator that you should approve or reject

All Projects All Roles Authored by Reset Search

Author	ID	Description	Project(s)	Your role	State	Last activity
	236	Need to be able to lookup a user id based on its username. Need to cope with the situatio...	mercury:main	Reviewer	Needs Review	1/0 8 days ago
	109	Test script test-16 for the new prototype. #review @!trriage		Required reviewer	Needs Review	0/0 about a month ago
	240	Adding in basic client api for getting client information.	mercury:dev	Reviewer	Needs Review	0/0 3 months ago
	243	Tweak to the test data for the new firmware.	test-data:data	Reviewer	Needs Review	0/0 3 months ago
	179	Adding basics.projects to documentation. #review @@ldocs		Reviewer	Needs Review	2/0 4 months ago
	105	Optimised some of the error checking to improve performance. #review @!trriage	mercury:main	Reviewer	Needs Review	0/0 7 months ago

The purpose of the dashboard is to allow you to focus on reviews that need to be done, so that other users are not blocked. The dashboard lists reviews according to the most recently modified first, and shows your role in the review.

A review is displayed on your dashboard if any of the following criteria are met:

- You are a reviewer or required reviewer, the review status is **Needs Review** and you have not already voted on it.
- You are a member of a reviewer group or a required reviewer group, the review status is **Needs Review** and you have not already voted on it. The review will remain on your dashboard even if the group has met its criteria if you have not already voted on it.
- You are the review author and the review status is **Needs Revision**, or **Approved** (only if the review is approved but not committed).
- You are a moderator or a member of a moderator group, the review status is **Needs Review**, the **Minimum up votes** requirement for the branch is satisfied, and one of the following is true:
 - There are no required reviewers.
 - All of the required reviewers have up-voted the review.
 - You are the last remaining required reviewer for the review.

Tip

If moderator behavior is configured to require approval from one moderator per branch and the review spans multiple moderated branches:

- You will see the review in your dashboard if the review has not been approved by another moderator from your branch.
- You will be able to **Approve and Commit** the review if it has been approved by moderators from all of the other branches.

Filtering

The dashboard can be filtered to display only reviews from a particular project, authored by a particular user, or matching a role. You can click the **Reset** button to reset these filters.

Filtering options are:

- **Projects**

You can filter by the project the review is part of, limiting results to **My Projects** (projects you are an owner of or a member of) or to an individual project. The **All Projects** drop down will only show projects for which there are reviews in your dashboard.

- **Roles**

You can filter by your specific role in a review, limiting results to reviews for which you are the author, a reviewer, a required reviewer, or a moderator. The **All Roles** drop down will only show roles for which there are reviews in your dashboard.

- **Authored by**

You can filter the reviews to only those that have been authored by a certain user. Type in this field to get a drop down list of users to filter by.

- **Reset**

Clicking the **Reset** button resets all dashboard filters back to their defaults.

- **Search**

Typing in the search field filters the reviews by their description.

Review fields

The dashboard shows a summary of the information for each review.

Author	ID	Description	Project(s)	Your role	State			Last activity
	240	Adding in basic client api for getting client information.	mercury:dev	Reviewer				0/0 2 months ago

Reviews that appear here are those which are waiting for action from you. The information presented should help you prioritize what to work on next.

- **Author**

The author of this review.

- **ID**

The ID of this review. Click on this to go to the review page.

- **Description**

The review description. It may be truncated if it is too long, in which case click on the ellipsis ... to expand it.

- **Project(s)**

List of project branches this review covers. A review may span multiple branches and projects. Click on one of them to navigate to the project page for that branch.

- **Your role**

The reason this review is in your dashboard. This can be Author, Reviewer, Required Reviewer, or Moderator.

- **State**

The current status of the review. This can be Needs Review, Needs Revision, or Approved.

Note

The Approved state only applies to review authors, it is only shown for a review that has been approved but has not been committed.

- **Type**

The type of review. This can be Pre-commit or Post-commit.

- **Votes**


The double column of votes displays the number of up votes and down votes for the review.


- **Last activity**

The last time that any changes were made to the review, including votes, comments, commits, and file changes.

Activity streams


An activity stream displays a list of events that have occurred recently in the associated Helix Server, whenever changelists are checked in, jobs are created, code reviews are updated, comments posted, etc.


All Activity ▾ Reviews Commits Comments Jobs 




paula.boyle updated description of [review 135 \(revision 2\)](#) for [main](#)
Tidying up some of the code to fix some of the edge conditions. 2 minutes ago


Also putting some support for future features in place. #review [@@triage](#)

 [Add a comment](#)




claire.brevia voted up [review 185 \(revision 1\)](#) for [main](#)
These browsers are no longer supported by the product and the code
should be removed. 4 minutes ago


 [Add a comment](#)



alex.randolph cleared their vote on [review 135 \(revision 2\)](#) for [main](#)
Tidying up some of the code to fix some edge conditions. 6 minutes ago


Also putting some support for future features in place. #review [@@triage](#)

 [Add a comment](#)



alex.randolph updated description of [review 135](#) for [main](#)
Tidying up some of the code to fix some edge conditions. 13 days ago


Also putting some support for future features in place. #review [@@triage](#)

 [Add a comment](#)

Activity streams are presented for global server activity, as well as for events occurring for projects and users. Logged-in users can click the **Activity** drop-down menu to choose between viewing all activity or just the activity of the projects and users that they are following.

Activity streams can be filtered to only display events related to reviews, changes, comments, or jobs. Click a filter label to enable that filter. Click the label again to disable the filter, or click a different filter to change filters.

When active, each filter label displays a distinct background color that matches the color stripe on the right side of each event in the activity stream, to help quickly identify each event's type.


RSS icon Anyone can subscribe to an RSS (Really Simply Syndication)  feed for a particular activity stream so that events can be monitored in your favorite feed reader.

Events within an activity stream contain links to their respective resources. Click the links to visit users, changelists, projects, comments, and more.

Each activity stream starts with as many as 50 events. As you scroll down the page, Swarm fetches additional events in batches of 50 until the stream is exhausted. For a long-running server, or a server with significant activity, it could take quite a while to receive all of the events.

Files

Helix Server's primary task is to version files, so Swarm makes it easy to browse the depot. Start browsing by clicking the **Files** link in the top toolbar.

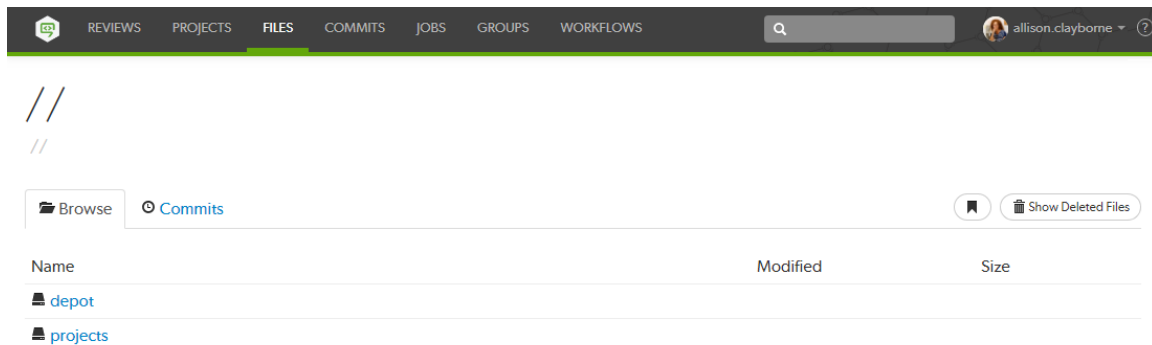

- Swarm displays a list of breadcrumb links to help you quickly navigate to higher level directories quickly.

[// projects](#) / [jplugin](#) / [main](#) / [src](#) / [test](#)

- Links with folder icons represent directories of files within the depot. Click a directory link to display the contents of that directory.
- Click the .. link with the up-arrow icon .., when it appears, to navigate to the current directory's parent.
- Links with dog-eared page icons represent individual files within the depot. See "File display" on the facing page for more information.
- Click the **Commits** tab to display the list of changes made to files in the current directory, or any directories it contains. See "Commits" on page 182 for more information.



Swarm creates links for files and directories wherever they appear in the Swarm UI.

Note

Directories that start with a period, for example `.git-fusion`, are sorted to appear at the end of the list of directories. The `..` link, when it appears, always appears first.

Similarly, files that start with a period, for example `.htaccess`, are sorted to appear at the end of the list of files.

Download files as a ZIP archive

The **Download .zip** button is used to download the selected files or folders in the Helix Server as a ZIP archive. This makes it easy to get a copy of files without having to setup a client.

Note

The **Download .zip** button is not displayed if the zip command-line tool is not installed on the Swarm

server. For information about installing, and configuring the zip command-line tool, see "Zip archive" on page 359.

When you click the **Download .zip** button, Swarm performs the following steps:

1. Scans the files/folders:
 - Checks that you have permission to access their contents, according to the Helix Core Server protections.
 - Checks that the total file size is small enough to be processed by Swarm.
2. Syncs the file contents to the Swarm server from the Helix Core Server.
3. Creates the ZIP archive by compressing the file content.
4. Starts a download of the generated ZIP archive.


Note

- You might not see all of the above steps; Swarm caches the resulting ZIP archives so that repeated requests to the same files/folders can skip the sync and compress steps whenever possible.
- If an error occurs while scanning, syncing, or compressing, Swarm indicates the error.

Browsing deleted files and folders

When the **Show Deleted Files** button is clicked, Swarm toggles the inclusion of deleted folders and files in the file display.

Deleted folders and files are presented slightly muted compared to non-deleted entries.



File display

When Swarm is asked to display a file, if the file is a type that Swarm can display, Swarm presents the file's contents. Clicking the **Open** button displays the file content with no surrounding page markup. Clicking the **Download** button causes the file to be downloaded.

When a file is opened it will by default be truncated to 1 MB in size. This limit can be increased (or removed) via the Swarm configurables. See [Files configuration](#) for details. This limit does not apply to downloaded files.

Along with the file's name, Swarm displays the version number for the currently displayed file. For example, this heading indicates that version 2 of `logo-1g.png` is being displayed:

logo-1g.png #2

Every version of a file is available on the [Commits](#) tab.


If the version of a file being previewed has been deleted, the version number appears in red:

logo.png #2

Text files

Swarm displays the contents of text files (including the Helix Server filetypes unicode and UTF16) with line numbers. When possible, syntax highlighting is applied to make identification of various elements within the file easier.

For more information on Helix Server filetypes, see [File Types](#) in [P4 Command Reference](#).

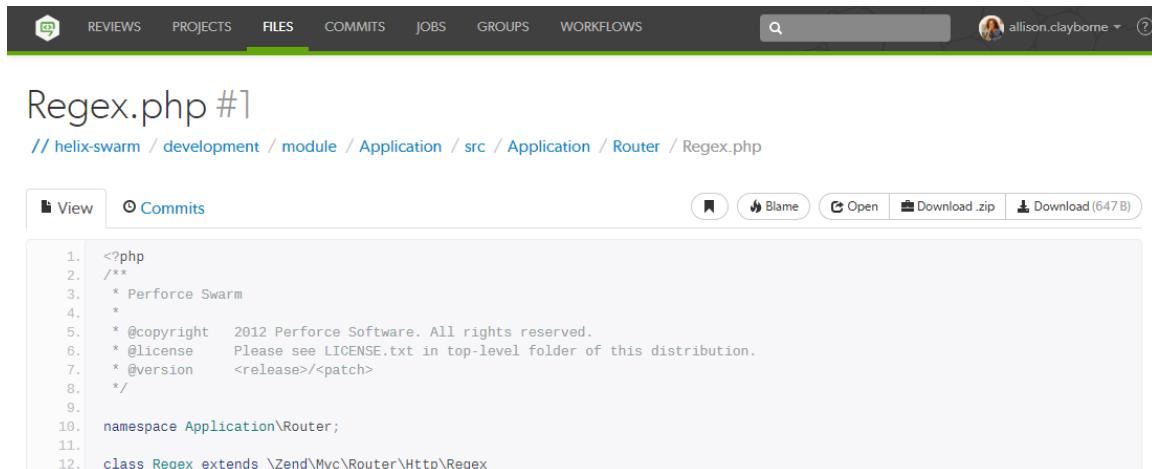

The screenshot shows the Swarm file viewer interface. At the top, there is a navigation bar with tabs for REVIEWS, PROJECTS, FILES, COMMITS, JOBS, GROUPS, and WORKFLOWS. A search bar and a user profile for 'allison.clayborne' are also visible. Below the navigation bar, the file name 'Regex.php #1' is displayed. Underneath, the file path is shown: '// helix-swarm / development / module / Application / src / Application / Router / Regex.php'. There are two tabs: 'View' and 'Commits', with 'Commits' being the active tab. To the right of the tabs are several action buttons: 'Blame', 'Open', 'Download .zip', and 'Download (647 B)'. The main content area displays the code for 'Regex.php' with line numbers from 1 to 12. The code is as follows:

```
1. <?php
2. /**
3.  * Perforce Swarm
4.  *
5.  * @copyright 2012 Perforce Software. All rights reserved.
6.  * @license Please see LICENSE.txt in top-level folder of this distribution.
7.  * @version <release></patch>
8.  */
9.
10. namespace Application\Router;
11.
12. class Regex extends \Zend\Mvc\Router\Http\Regex
```

Click **Blame** to add a column to the display that identifies the userid responsible for each line of the file.

Regexp.php #1

// helix-swarm / development / module / Application / src / Application / Router / Regexp.php

View Commits

Blame Open Download .zip Download (647 B)

```

1. allison.c... <?php
2. allison.c... /**
3. allison.c...  * Perforce Swarm
4. allison.c...  *
5. allison.c...  * @copyright 2012 Perforce Software. All rights reserved.
6. allison.c...  * @license Please see LICENSE.txt in top-level folder of this distribution.
7. allison.c...  * @version <release>/<patch>
8. allison.c...  */
9. allison.c...
10. allison.c... namespace Application\Router;
11. allison.c...
12. allison.c... class Regex extends \Zend\Mvc\Router\Http\Regex

```

Each userid presented is a link that, when clicked, displays the changelist that provided the associated text. Muted userids indicate that the associated text is from the same changelist as the line above. For example, the userid *allison.c* is responsible for lines 1, 10, and 12 in the screenshot above.

When you hover your pointer over a userid in the blame column, a tooltip appears displaying the associated changelist description.

View Commits

```

1. allison.c... # U
2. allison.c...
3. allison.c... ## S
4. allison.c...

```

Change 6


Imported JPlugin project into repository.

2 months ago

When there are no lines displayed, for example when you are viewing empty or shelved files, the **Blame** button is disabled.

Images

Swarm displays web-safe images.

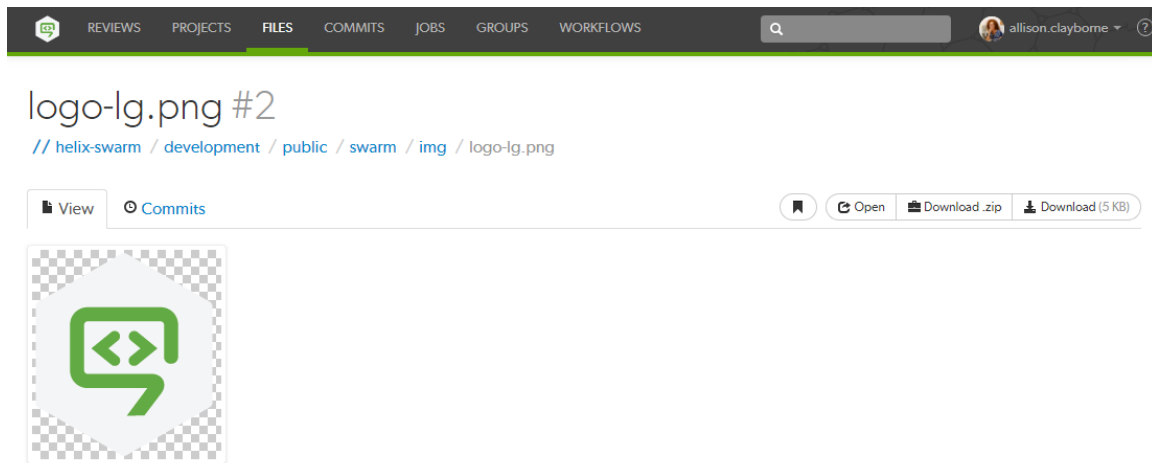

The checkerboard background in this example is not part of the logo; it helps identify where transparency exists.

Many browsers can display SVG images with no additional plugins, so Swarm attempts to display SVG images rather than displaying the image's definition. When you use a browser that cannot natively display SVG images, you see the broken image icon.

When imagick (an optional module that integrates ImageMagick into PHP) is installed, Swarm can also display the following image formats: BMP, EPS, PSD, TGA, TIFF.

3D models

Swarm 2014.1 includes support for displaying select 3D model file types in the browser:



Supported file types include:

- **DAE** - including any referenced web-safe texture images.
- **STL** - both binary and ASCII versions of the format.

- **OBJ** - including any referenced MTL files, and web-safe texture images.

When Swarm can display a 3D model, it renders a generic grid *stage* and places the model in the center, scaled to make viewing straightforward. A toggle control appears in the top right: when enabled, you can control the view with the mouse, and when not enabled, permits auto-rotation to occur (when possible).

1. Click and hold the **left mouse button** to begin rotating the view. Drag while holding the left mouse button to rotate the view.
2. Click and hold the **right mouse button** to begin panning the view. Drag while holding the right mouse button to pan the view.
3. Roll the **mouse wheel** up or down to adjust the magnification of the view.

When possible, a second control appears allowing you to toggle between showing the model with surfaces, or just showing the model's wireframe.

Note

For systems with hardware acceleration, if your browser supports WebGL and hardware acceleration is enabled, Swarm renders the model and enables auto-rotation.


For systems without hardware acceleration or WebGL, but your browser supports HTML5 canvas elements and JavaScript TypedArrays, Swarm renders the model but auto-rotation is disabled. Rendering is likely to be slow and rendering quality is likely to be low.

For browsers without HTML5 canvas elements and JavaScript TypedArrays, no rendering is attempted; instead, users see a message indicating that the browser is not supported.

Other file types

It is possible to view other file types in Swarm, through the addition of additional modules, or by installing "[LibreOffice](#)" on page 357 on the Swarm host.

When the file is a type that Swarm cannot display, Swarm presents the file's [history](#), along with the **Download** button.

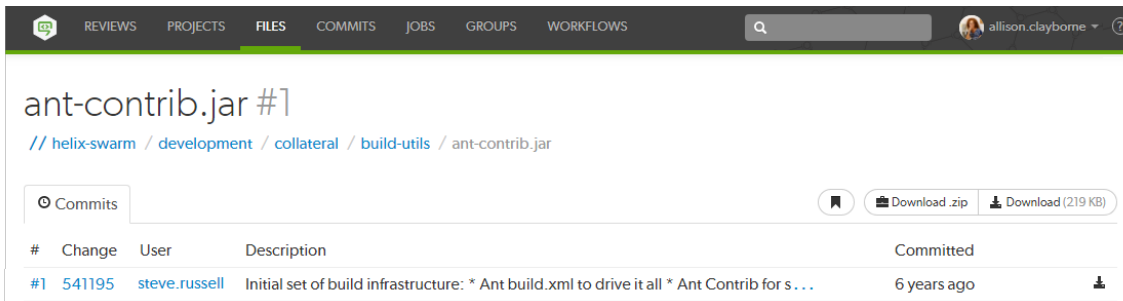


The screenshot shows the Swarm interface for a file named 'ant-contrib.jar'. The breadcrumb path is: // helix-swarm / development / collateral / build-utils / ant-contrib.jar. There are two download buttons: 'Download .zip' and 'Download (219 KB)'. Below the file name, there is a 'Commits' section with a table of commit history.

#	Change	User	Description	Committed
#1	541195	steve.russell	Initial set of build infrastructure: * Ant build.xml to drive it all * Ant Contrib for s...	6 years ago

Commits

Whenever a new version of a file is checked into the Helix Server, a commit record is created. Begin browsing the history of commits by clicking the **Commits** link in the main toolbar.


When you are viewing a particular file or directory, clicking the **Commits** tab displays the commits for that location in the depot.

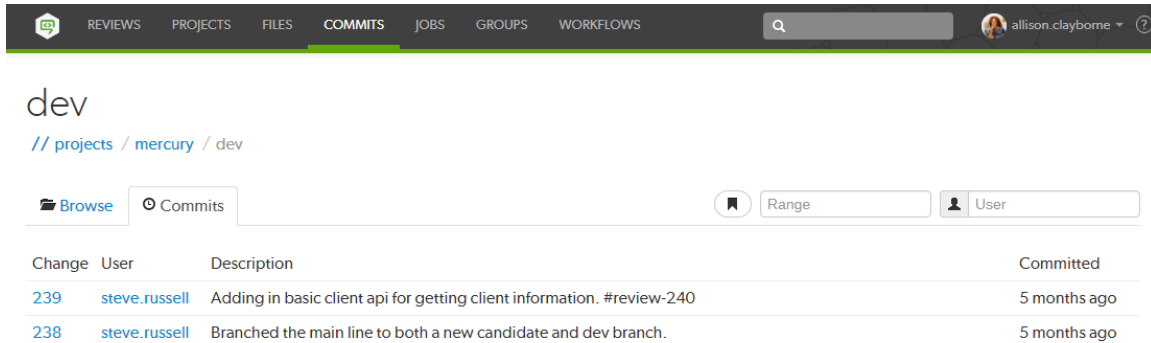

Change	User	Description	Committed
239	steve.russell	Adding in basic client api for getting client information. #review-240	5 months ago
238	steve.russell	Branched the main line to both a new candidate and dev branch.	5 months ago

Range filter

The **Range** field lets you filter the list of changes for the depot path being viewed. When you click the **Range** field, a dropdown syntax guide appears providing sample commit filtering expressions.

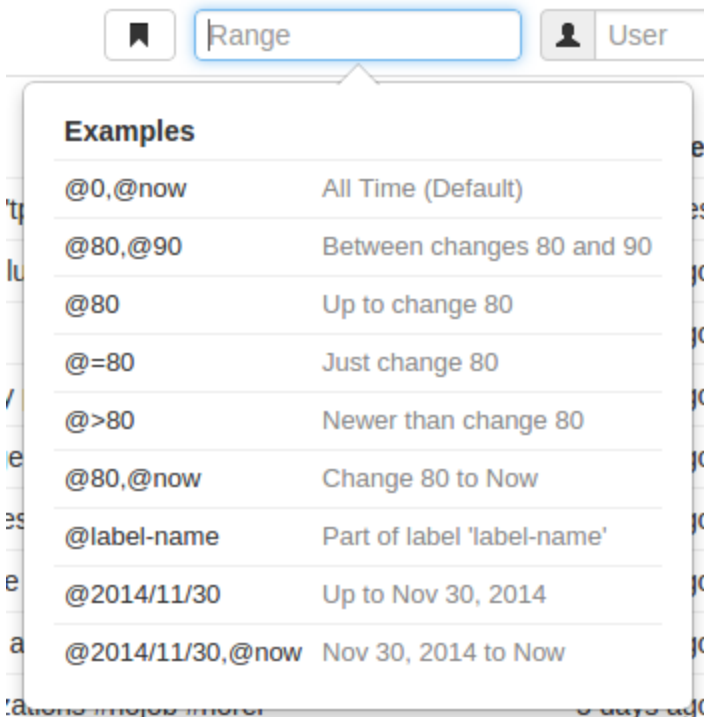

Examples	Description
@0,@now	All Time (Default)
@80,@90	Between changes 80 and 90
@80	Up to change 80
@=80	Just change 80
@>80	Newer than change 80
@80,@now	Change 80 to Now
@label-name	Part of label 'label-name'
@2014/11/30	Up to Nov 30, 2014
@2014/11/30,@now	Nov 30, 2014 to Now

The expressions that can be used within the **Range** field include:

- @0,@now (the default): displays all commits for the current depot path.
- @80,@90: displays all changes between 80 and 90.
- @80: displays all changes up to change 80.
- @=80: displays only change 80. Change 80 might not involve the current depot path, so there may be no commits to display.
- @>80: displays all changes newer than change 80.
- @80,@now: displays all changes from change 80 to now.
- @label-name: any changes represented by label *label-name*.
- @2014/11/30: displays all changes up to November 30, 2014.
- @2014/11/30,@now: displays all changes from November 30, 2014 to now.

File Commits

A file's commit history presents each version of a file that the Helix Server knows about, including the change number, userid, change description, time ago, along with **Open** and **Download** buttons.


README.md #1

// projects / mercury / candidate / README.md

View Commits Open Download (57 B)

#	Change	User	Description	Committed
#1	238	steve.russell	Branched the main line to both a new candidate and dev branch.	5 months ago
// projects/mercury/main/README.md				
#1	5	jack.boone	Moved project to projects depot.	7 months ago
// depot/projects/mercury/main/README.md				
#2	3	jack.boone	Updated format of the project README.	7 months ago
#1	2	jack.boone	Added README to the Mercury project main branch.	7 months ago

Swarm also displays *contributing commits* when available, such as when a file has been renamed, or integrated from another location in the Helix Server.

If a commit represents a deleted revision, the **Open** and **Download** links are replaced with a trashcan icon  to indicate that this version is no longer available.

Remote depot commits

When your Helix Server has a remote depot configured, you can browse the contents of the remote depot, but remote depots do not share their commit history. If you attempt to view the commits of a file provided by a remote depot, Swarm displays:

Jobs

Jobs are a component of Helix Server's defect tracking system and a record of bugs found or improvement requests. Jobs can be associated with [changelists](#) to create *fix* records, indicating the work that solved the problem or provided the requested feature. Begin browsing jobs by clicking the **Jobs** link in the main toolbar.


You can search available jobs by entering a job filter in the search box. Words, phrases, and **field=value** pairs can be entered. For example, entering **reportedby=steve.russell swarm** displays jobs that user *Steve Russell* has reported that also contain the word *swarm* in the description.

Job	Status	Reported By	Description	Modified Date
job093521	Inprogress	steve.russell	Remove the bash and vbs versions of the swarm-trigger. With this change we need to be careful not t...	about 3 hours ago
job093520	Open	steve.russell	The post format dropdown on project settings can appear in the wrong spot (to the right of post bod...	about 4 hours ago

The fields you can search for depend on the jobspec defined in your Helix Server.


Edit the Job columns

Configure the columns that are displayed:

1. Click the **Select Columns** button  beside the search field to display the dropdown menu. The dropdown menu shows all of the available jobspec fields.
2. Select the columns to display using the checkboxes in the dropdown menu.
3. Drag the column label up or down the list to change the order the columns are displayed in.
4. Click the **Select Columns** button again, or a blank portion of the page, to hide the menu.

Change the column order from the **Jobs** page:

1. Click a column heading and drag it to the left or right to move the column to a new position.
2. The column display updates as columns are dragged.

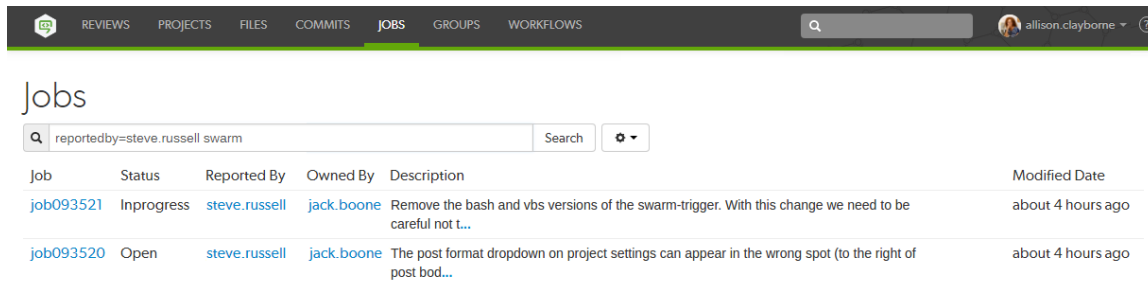

Job	Status	Reported By	Owned By	Description	Modified Date
job093521	Inprogress	steve.russell	jack.boone	Remove the bash and vbs versions of the swarm-trigger. With this change we need to be careful not L...	about 4 hours ago
job093520	Open	steve.russell	jack.boone	The post format dropdown on project settings can appear in the wrong spot (to the right of post bod...	about 4 hours ago

For more information on customizing job specifications, see [Customizing Helix Server: Job Specifications](#) in *Helix Core Server Administrator Guide: Fundamentals*.


Job display

Jobs are typically identified with the word job followed by six digits, e.g. `job000123`.

View a specific job by clicking on a linked job identifier, or by visiting the URL:

`https://myswarm.url/jobs/jobid`

When Swarm displays a job, the presentation is similar to:

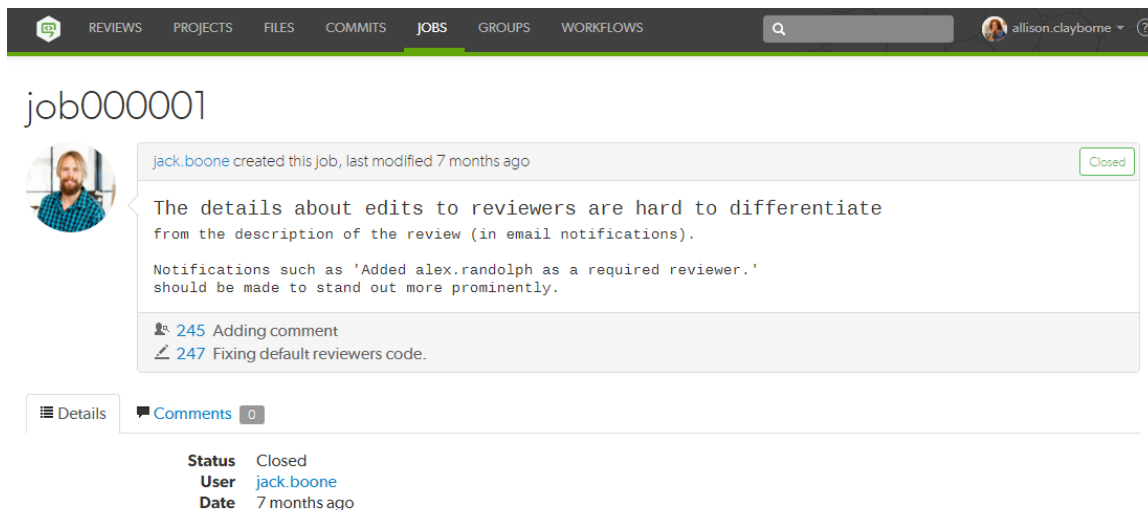

job000001

[jack.boone](#) created this job, last modified 7 months ago Closed

The details about edits to reviewers are hard to differentiate from the description of the review (in email notifications).
Notifications such as 'Added alex.randolph as a required reviewer.' should be made to stand out more prominently.

245 Adding comment
247 Fixing default reviewers code.

Details **Comments** 0

Status Closed
User [jack.boone](#)
Date 7 months ago


The upper portion of the job presentation includes:

- The avatar and userid of the user that created the job
- The job's [creation time](#)
- If changes have been made to the job, the modifying userid and [time](#)


- A status indicator
- The job's description
- If any changelists have been submitted that *fix* the job, a list of those changelists and their descriptions. Each associated changelist includes an icon to represent their type: 👤 (review), ⏸️ (pending), ✅ (committed)

The lower portion of the job presentation lists all of the keys configured in your Helix Server's jobspec. Swarm inspects the jobspec and enhances the presentation of fields it recognizes. For example, date fields display as *time ago*, and links are created for *userids*.

Click the "Comments" on page 196 tab to view any comments added to the job, or to add a comment.

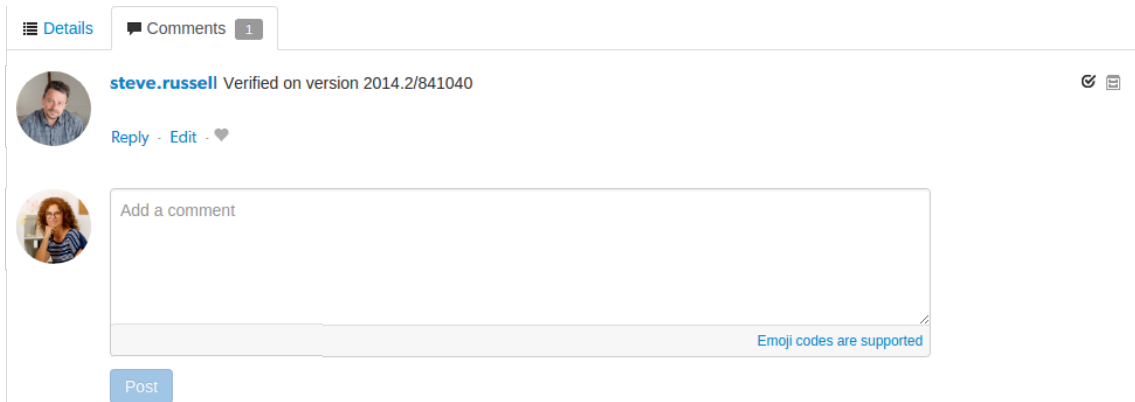

Adding a comment sends a [notification](#). The **Comments** tab displays the number of open comments associated with the job. If you hover your mouse over the comment count, a tooltip is displayed showing how many comments are archived:




For more information on customizing job specifications, see [Customizing Helix Server: Job Specifications](#) in *Helix Core Server Administrator Guide: Fundamentals..*

Note

The default Helix Server job specification contains very few fields. Adding fields to record additional information, such as the modification time and userid, reporting time and userid, can assist Swarm use appropriate terminology when describing the current disposition of a job.

Add jobs

Swarm does not provide the ability to create new jobs in the Helix Server, but jobs can be added to changelists or reviews:

1. Navigate to a changelist or review.
2. Click the **Add Job** link  **Add Job**.
3. Scroll through the available jobs, or enter job search criteria to search available jobs.

Select Job ✕

Search

Job	Status	Description
job080016	review	Currently, the test status (pass or fail) is indicated for a review, h...
job080010	open	[doc] Update What's New section for 2015.2
job080009	open	[doc] Update upgrade instructions for 2015.2
job080002	closed	When editing a project that has owners, unchecking the 'Owners' checkb...
job080001	open	Navigation away from the project settings page after a change has been...
job079995	open	At the moment test steps which check a change description only match t...
job079990	open	Currently the functions iShouldSeeButton() and iClickOnTheButton() sel...
job079989	open	Currently there seem to be two ways of naming these. For example, JobC...
job079988	closed	Add basic test cases for commits
job079987	open	Add test case for downloading an old version of a file

Select Cancel

For more information on job search criteria, see [Jobs](#) in *Helix Core Server User Guide*.

4. If you find the job you want to add, click its row to highlight it and then click **Select**. Or, double-click the desired job to add it.
5. If you do not find the appropriate job, click **Cancel**.

Note

If you attempt to add a job to a review that affects a single project, Swarm applies the project's job view filter to display only jobs that affect the project. It is not currently possible to expand the filter to include jobs outside of the project.

Unlinking jobs

Swarm does not provide the ability to delete jobs from the Helix Server, but jobs can be unlinked from changelists or reviews:

1. Navigate to a changelist or review that has an associated job.
2. Click the **X** button beside the job.
3. When prompted for confirmation, click **Unlink** to unlink the job.

Changelists

Changelists are the basic unit of versioning work in Helix Core Server. A changelist is a list of files, their revision numbers, and the changes made to those files. Commits is a shorter synonym used throughout Swarm.

More information is available here:

- [Browsing changelists](#)
- [Browsing a user's shelved changelists](#)
- [Swarm's internal use of changelists to facilitate code reviews](#)

Changelist Display

View a specific *changelist* by clicking on a linked changelist number, or by visiting the URL:
`https://myswarm.url/changes/changelist number`

When Swarm displays a change, the presentation is similar to:

Change 238

steve.russell committed this change 21 days ago into //projects/mercury [Request Review](#)

Branched the main line to both a new candidate and dev branch.

[Add a Comment](#)

[+ Add Job](#)

Files 8 Comments 0

0 edited 8 added 0 deleted

- > candidate/README.md#1
- > candidate/src/api/Jamfile#1
- > candidate/src/api/Jamfile.api#1
- > candidate/src/api/p4api.cc#1
- > dev/README.md#1
- > dev/src/api/Jamfile#1
- > dev/src/api/Jamfile.api#1
- > dev/src/api/p4api.cc#1

Tip: Use **n** and **p** to cycle through the changes.

The changelist display includes:

- The avatar and userid of the user who made the change
- The time the change was made
- The common depot location containing all the files included in the change
- The **Download .zip** button, used to download a ZIP archive that contains all of the files in the changelist:

Important

Files **Marked for Add** in pre-commit reviews and shelved changelists are not included in the zip file.

Note

The **Download .zip** button is not displayed if the zip command-line tool is not installed on the Swarm server. For information about installing, and configuring the zip command-line tool, see "[Zip archive](#)" on page 359.

When you click the **Download .zip** button, Swarm performs the following steps:

1. Scans the files/folders:
 - Checks that you have permission to access their contents, according to the Helix Core Server protections.
 - Checks that the total file size is small enough to be processed by Swarm.
2. Syncs the file contents to the Swarm server from the Helix Core Server.
3. Creates the ZIP archive by compressing the file content.
4. Starts a download of the generated ZIP archive.

Note

- You might not see all of the above steps; Swarm caches the resulting ZIP archives so that repeated requests to the same files/folders can skip the sync and compress steps whenever possible.
- If an error occurs while scanning, syncing, or compressing, Swarm indicates the error.

- If the change was involved in a code review, a link to the review along with a **View Review** button.
- The description of the change
- A list of jobs that this change *fixes*, if any. You can [add jobs](#) and [unlink jobs](#) here.
- The list of files included in the change, including any folders between the common depot location and the file, and the file's version number.
- A tab to review any comments made regarding the change, or any of its files.

Each file is presented in a diff display, showing you whether the file was added, modified, or deleted. For text-based and image files, Swarm can display any changes made within the file. For changes with only a single file, the diff display is the default; otherwise each file is listed. Click the filename to see the diff display. See ["Diffs" below](#) for more information.


The **Request Review** button indicates the current state of this change; no Review record has been created. Clicking **Request Review** starts a code review for this change. For more information, see ["Start a review" on page 275](#).

Important

If your Helix Server is configured as a commit-edge deployment, and your normal connection is to an edge server, Swarm refuses to start reviews for shelved changes that have not been promoted to the commit server.


Within Swarm, this means that the **Request Review** button does not appear for unpromoted shelved changes. Outside of Swarm, attempts to start reviews for unpromoted shelved changelists appear to do nothing. Ask your Helix Server administrator for assistance if you cannot start a review.

An administrator of the Helix Server can automatically promote shelved changes to the commit server by setting the configurable `dm.shelve.promote` to 1.

When a file in a changelist has one or more associated comments, an icon  appears near the far right of the file's entry.

Diffs

When you view a changelist or code review, the associated files are presented as *diffs*, short for differences, showing you how they have changed.

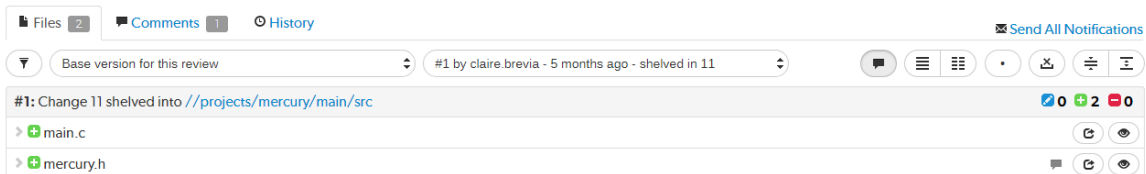

The review revision selectors are used to specify which revisions of a review you want to *diff*, they are located in the **Files** tab above the list of files.

- **Left dropdown selector:** the base version for the review is selected by default, base is the version of the file that was checked out of the depot before it was changed for this review. The current version in the depot, sometimes called Head can be selected, if there are multiple revisions of the review a specific revision can be selected.
- **Right dropdown selector:** the latest revision of the review is selected by default. If there are multiple revisions of the review, a specific revisions of the review can be selected.

Tip

If a review consists of one or more Swarm-managed changelists. When comparing versions of a review, Swarm is showing any differences between the selected versions, not the review author's personal changelist. See "[Internal representation](#)" on page 253 for details.

The first row of buttons above the files allow you to (left to right):



- **Show Comments** button: toggles the display of comments to inline in files or only in the **Comments** tab.
- **Show Diffs In-Line** button: displays all diffs as inline.
- **Show Diffs Side-by-Side** button: displays all diffs as side-by-side.
- **Toggle Show Whitespace** button: toggles the display of whitespace characters (such as space, tab, and newline) for all files.
- **Toggle Ignore Whitespace** button: toggles the highlighting of whitespace changes in all of the file diffs.
 - **Highlight whitespace changes:** makes it easier to identify changes in file types where whitespace is important. This is the default value.
 - **Ignore whitespace changes:** whitespace changes are not highlighted, this makes it easier to see the important changes in file types where whitespace changes are not important.
- **Collapse All** button: collapses all files
- **Expand All** button: expands all files. By default this button is disabled if there are more than 10 files in the review. For details, see [Expand All Limit](#)

Tip

The default states for the **Show Comments**, **Show Diffs Side-by-Side**, **Toggle Show Whitespace**, and **Toggle Ignore Whitespace** buttons are set in your user settings, see [User Settings](#).

Each file is presented with an icon indicating whether the file was:


- Added/Branched/Imported
- Edited/Integrated
- Deleted

The file's presentation can be controlled with (left to right):



- **Comments in File** icon (only displayed if the file contains comments): indicates that the file contains comments.
- **Show In-line** button: highlights line additions, modifications, and removals in a single pane.
- **Show Side-by-Side** button: highlights additions, modifications, and removals in two panes, with the older version of the file on the left, and the newer version on the right.
- **Show Whitespace** button: makes whitespace characters more visible; spaces show up as dots, tabs show up as arrows that point to a bar, and line endings show up as down-pointing arrows.
- **Ignore Whitespace** button: toggles the highlighting of whitespace changes in a file, making it easier to identify non-formatting changes. Normally, whitespace is not ignored.
- **Toggle Ignore Whitespace** button: toggles the highlighting of whitespace changes in the file diff.
 - **Highlight whitespace changes:** makes it easier to identify changes in file types where whitespace is important. This is the default value.
 - **Ignore whitespace changes:** whitespace changes are not highlighted, this makes it easier to see the important changes in file types where whitespace changes are not important.
- **Show all diffs** button (edited and integrated files only): toggles between displaying all the diffs for the file and only the first few. The limit of what are shown by default is configurable by the administrator (see [Max Diffs](#)) and defaults to 1500. If there are fewer than that then this button is hidden.
- **Show Full Context** button (edited and integrated files only): toggles between displaying only the portions of the file that have changed and the full file.
- **Open File** button (edited or integrated files only): opens a new browser tab/window display the full file (where possible), provide access to its history, and a button to download the file.
- **Mark file as read** button (displayed only for code reviews only): helps you (and others) keep track of which files have been reviewed. This is particularly useful when a code review consists of many files.

When clicked, the button color inverts and the associated file is visually muted, to make it easy to distinguish read files from unread files:



If a file has been marked as read, click the button a second time to reset the status to unread.

Viewing a diff

When you view a diff, the changes are highlighted:

- Red indicates lines that have been removed.
- Blue indicates lines that have been modified.
- Green indicates lines that have been added.

151	# Initialize variables	151	# Initialize variables
152	#	152	#
153	# "default =" - set only if unset	153	# "default =" - set only if unset
154		154	
155		155	
156	OSFULL = \$(OS)\$(OSPLAT)\$(OSVER) \$(OS)\$(OSPLAT) \$(OS)	156	OSFULL = \$(OS)\$(OSPLAT)\$(OSVER) \$(OS)\$(OSPLAT) \$(OS)
157		157	
158	#	158	#
159	# OS specific variable settings	159	# OS specific variable settings
160	#	160	#
161		161	
162	switch \$(OS)	162	switch \$(OS)
163	{	163	{
164	case AIX : LINKLIBS default = -lbsd ;	164	case AIX : LINKLIBS default = -lbsd ;
165	case DGUX : RANLIB default = "" ; RELOCATE =	165	case DGUX : RANLIB default = "" ; RELOCATE =
166	case HPUX : RANLIB default = "" ;	166	case HPUX : RANLIB default = "" ;
167	INSTALL default = "" ;	167	INSTALL default = "" ;
168	case IRIX : RANLIB default = "" ;	168	case IRIX : RANLIB default = "" ;
169	INSTALL default = "" ;	169	INSTALL default = "" ;
170	case MVS : RANLIB default = "" ; RELOCATE =	170	case MVS : RANLIB default = "" ; RELOCATE =
171	case NEXT : AR default = libtool -o ;	171	case NEXT : AR default = libtool -o ;
172	RANLIB default = "" ;	172	RANLIB default = "" ;
173	case NCR : RANLIB default = "" ;	173	case NCR : RANLIB default = "" ;
174	INSTALL default = "" ;	174	INSTALL default = "" ;
175	case PTX : RANLIB default = "" ;	175	case PTX : RANLIB default = "" ;
176	case QNX : INSTALL default = "" ;	176	case QNX : INSTALL default = "" ;
177	case SCO : RANLIB default = "" ;	177	case SCO : RANLIB default = "" ;
210	CCFLAGS default = -nosyspath	209	CCFLAGS default = -nosyspath
211	C++ default = \$(CC) ;	210	C++ default = \$(CC) ;
212	C++FLAGS default = -nosyspath ;	211	C++FLAGS default = -nosyspath ;
213	FORTTRAN default = "" ;	212	FORTTRAN default = "" ;
214	LIBDIR default = /boot/develop	213	LIBDIR default = /boot/develop
215	LINK default = mwld ;	214	LINK default = \$(CC) ;
216	LINKFLAGS default = "" ;	215	LINK default = \$(CC) ;
217	LEX default = "" ;	216	LEX default = "" ;
218	MANDIR default = /boot/documen	217	MANDIR default = /boot/documen
219	NOARSCAN default = true ;	218	NOARSCAN default = true ;
220	RANLIB default = "" ;	219	RANLIB default = "" ;
221	STDHDRS default = /boot/develop	220	STDHDRS default = /boot/develop
1884	actions quietly updated piecemeal together RmTe		
1885	{		
1886	{		
1887	\$(RM) \$(>)		
1888	}		
1889	}		
1890	actions Shell		
1891	{		
1892	copy \$(>) \$(<)		
1893	}		
1894	}		
1895		1769	
1896		1770	
1897	#	1771	#
1898	# Backwards compatibility with jam 1, where rules w	1772	# Backwards compatibility with jam 1, where rules w
1899	#	1773	#

Show more context buttons

The diff presentation displays a concise view of where changes were made within a file, showing the changed lines and only a few lines before and after the change. Sometimes, this concise view needs to be expanded to fully understand the context of the change, use the **Show More** and **Show All** buttons to display extra lines around the change:


Note

By default, the number of extra lines displayed when you click the **Show More Lines Above** and **Show More Lines Below** buttons is 10. This setting can be changed by your Swarm administrator, see "More context lines" on page 417.


- ⏶ **Show All Lines to Start of File** button (only displayed for the first change in the file): click to show all of the lines up to the start of the file.
- ⏶ **Show More Lines for the Code Below** button: click to show 10 more lines above the change, the extra lines are displayed in the pane below the button.
- ⏶ **Show Entire Section** button: click to show all of the lines between the changes that are above and below the button, the two changes and the lines between them are displayed in a single pane.
- ⏷ **Show More Lines for the Code Above** button: click to show 10 more lines below the change, the extra lines are displayed in the pane above the button.
- ⏷ **Show All Lines to End of File** button (only displayed for the last change in the file): click to show all of the lines down to the end of the file.

Comments

Comments can be displayed within the body of a file and appear immediately below the line the commenter targeted for comment. See "Comments" on page 196 for more details.

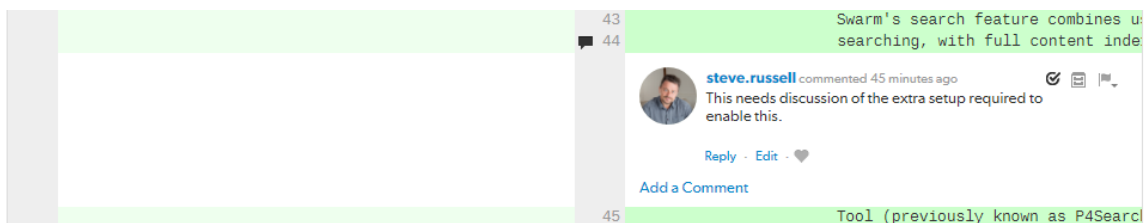

Note

The *comment here* icon  appears in the line number column whenever there is a comment. Click the icon to display the comment and click the icon again to collapse the comment. This is useful when the comment display is toggled off.

Inline diff view

When viewing a diff in-line, the line numbers for the old version are first, the line numbers for the new version are second, and they are followed by the file content. Some users find it easier to use this view to locate an area that has changed, but they then switch to the side-by-side view to understand the change better. Swarm maintains the scroll position, you do not lose your place in the file after toggling the diff view.

```

151 151
152 152 # Initialize variables
153 153 #
154 154 # "default =" - set only if unset
155 155
156 156 +if $(NT) { OS = NT ; }
157 157 +
158 158 OSFULL = $(OS)$OSPLAT)$OSVER) $(OS)$OSPLAT) $(OS)$OSVER) $(OS) ;
159 159
160 160 #
  
```

Note

Press **n** on your keyboard to scroll to the next changed area within a file. Press **p** to scroll to the previous change.

Per-file toolbar

When a diff contains multiple files, the changes can be taller than your browser window. Swarm keeps the *per-file toolbar* in view for each file as you scroll, this means that you can identify the file and control its presentation with the buttons on the right of the toolbar.

```

275 275
276 276 # define MAXSYM 1024 /* longest symbol in the environment */
277 277 # define MAXJPATH 1024 /* longest filename */
278 278
279 279 # define MAXJOBS 64 /* silently enforce -j limit */
280 280 # define MAXARGC 32 /* words in $(JAMSHELL) */
281 281
282 282 # define CMDBUF 10240 /* size of command blocks */
283 283
284 284 /* Jam private definitions below. */
285 285
286 286 # define DEBUG_MAX 10
287 287
288 288 struct globs {
  
```

```

1 1 /* Generated by mkjambase from Jambase */
2 2 char *jambase[] = {
3 3 /* Jambase */
4 4 "OSFULL = $(OS)$OSPLAT)$OSVER) $(OS)$OSPLAT) $(OS)$OSVER) $(OS) ;\n",
5 5 "switch $(OS)\n",
6 6 "{\n",
7 7 "case AIX : LINKLIBS default = -lbsd ;\n",
  
```

Comments

Comments are the primary feedback mechanism provided by Swarm. Review comments can be flagged as *tasks* for a lightweight workflow within a review that helps authors and reviewers prioritize review feedback, see "[Tasks](#)" on [page 198](#) for details. By default, comment notifications are delayed to allow you to add or edit comments as you progress through a review without sending a notification for each individual comment on the review. Comment notifications are rolled up into a single notification that you can either leave to be sent automatically, or you can send manually, see "[Comment notification delay](#)" on [page 202](#).

You can also like comments, add links, add attachments, and add Emoji emoticons, see "[Comment features](#)" on [page 202](#) for details.

You can add comments to:

- A changelist, review, or job
- A changelist or review description
- A line of a text file in a changelist, or review
- A file in a changelist, or review

Access comments for a changelist, review, or job, by clicking the **Comments** tab. The number of open (non-archived comments) is displayed in the tab. Hover your mouse pointer over the comment count, the tooltip shows how many comments are archived. See "[Archiving comments](#)" on [page 210](#) for details.

Adding comments

This section describes how to add comments.

Related comment features:

- [Comment notification delay](#)
- [Reply to comment](#)
- [Emoji](#)
- [Links](#)
- [Attachments](#)
- [Markdown](#)

Tip

You can use "[@mention](#)" on [page 241](#) in comments. An @mention includes the specified user in the review, and they will receive a notification whenever there is an update to the review.

Commenting on a changelist, review or job

1. From the changelist, review, or job page: click **Comments** to view the **Comments** tab.
2. Add your comment in the text area.
3. Click **Post**.

Commenting on a changelist or review description

1. From the changelist or review page description area: click **Add a Comment** or **X Comments** (where **X** is the number of comments that already exist).
2. Add your comment in the text area.
3. Click **Post**.

Tip

To hide the description comments, click **X Comments** (where **X** is the number of description comments that exist). To display the comments again, click **X Comments**.

Commenting on a specific line in a file in a changelist or review

1. From the changelist or review page: click **Files** to view the **Files** tab.
2. Click on the line you want to comment on.
3. Add your comment in the text area.
4. Click **Post**.

Commenting on a file in a changelist or review

1. From the changelist or review page: click **Files** to view the **Files** tab.
2. If there are multiple files, click the file you want to comment on to expand its view.
3. Click the **Add a Comment** link in the footer of the file display.
4. Add your comment in the text area.
5. Click **Post**.

Editing comments

This section describes how to edit comments.

Related comment features:

- [Comment notification delay](#)
- [Reply to comment](#)

- [Emoji](#)
- [Links](#)
- [Attachments](#)
- [Markdown](#)

Note

- You can only edit comments that you have created.
- If a comment is edited, all of the likes for that comment are removed.

1. Click the comment **Edit** link.
2. Edit the comment content, including adding new attachments or removing existing attachments.

When you remove an attachment, the attachment is marked for removal, the green bar for the attachment is muted, and the **X** button is replaced with a **Restore** button ➔.

Tip

Click the **Restore** button ➔ to the right of the attachment to keep the attachment on the comment.

Attachments cannot be restored after the comment edit has been saved. In this case you must edit the comment again and add the attachment to it.

3. Click **Save** to save the edited comment and remove any attachments marked for removal. The comment timestamp is marked as *(edited)* to show that the comment has been changed. Swarm sends a notification to everyone involved in the review, including the review author and the reviewers, but not the editor of the comment.

Note

Swarm does not provide a mechanism to see older versions of edited comments.

Tasks

Flagging review comments as *tasks* is a lightweight workflow within a review that helps authors and reviewers prioritize review feedback. Any comment on a code review can be flagged as a task, indicating to the code review's author that the described issue needs to be addressed, and that the review is unlikely to be approved without a fix.

Note

Changelist and Job comments cannot be flagged as tasks.

Flag a comment as a task

To flag a comment as a task, select the **Flag as Task** checkbox when posting a comment, or click the **Flag** button in the upper right of an existing comment and select **Flag as Task** in the drop-down menu.




Note

If you do not have permission to archive comments, you do not have permission to flag comments as tasks. Anonymous users never have permission to archive comments, and can only view current task states.

Set a task to Task Addressed or Not a Task


Once a comment is flagged as a task, it is considered to be an *open task*. Click the **Red Flag** button to display a drop-down menu with the following options:

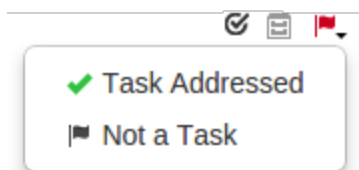

- **Task Addressed:** usually used by the author of the review to indicate that the issue has been fixed.
- **Not a Task:** used to correct comments that have been flagged as tasks by mistake.

Verify a task, verify and archive a task, or reopen a task


A comment with a green check indicates that the task has been addressed. Click the **Green Check** button to display a drop-down menu with the following options:

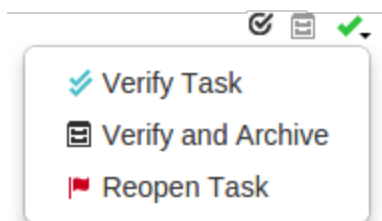

- **Verify Task:** usually used by the author of the comment, or another reviewer, after confirming that the issue is fixed.
- **Verify and Archive:** used to both indicate that the issue has been fixed, and to archive the comment so that it is hidden from view. Archived tasks, whether they are open, addressed, or verified, are not included in the task counts for the code review.
- **Reopen Task:** used if the issue needs further work after it has been marked as addressed.

Reopen a task

A comment with a blue double-check indicates that the task has been verified. Click the **Blue Double-check** to display a drop-down menu with the following option:




- **Reopen Task:** used if the issue needs further work post-verification, or if verification was made by mistake.

Task list

A summary of the number and status of comments flagged as tasks is displayed below the code review description. Archived comments that are flagged as tasks are not included in the summary.



Click the **Task list** button  to display a dialog listing all tasks associated with the review:

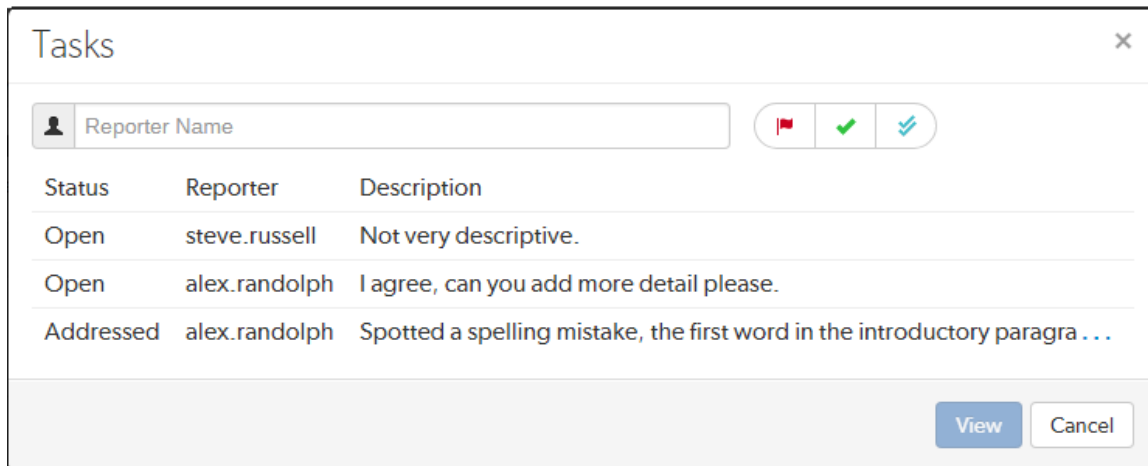

Within the **Tasks** dialog, you can filter the tasks by the reporter (the userid of the user who created the task), and/or by task state:

- Click the **Red Flag** button to display only open tasks (comments that need to be addressed).
- Click the **Green Check Mark** button to display only addressed tasks (comments that have been addressed).
- Click the **Blue Double-check Mark** button to display only verified tasks (comments that have been addressed and verified).

Note

Archived tasks do not appear in the Tasks dialog.

To view a particular task, select the task in the **Tasks** dialog, and click the **View** button. Alternately you can double-click on the task in the **Tasks** dialog. The **Tasks** dialog closes and Swarm adjusts the review display so that the chosen task is in view.

Approve a Review with open tasks


Flagging a comment as a task provides a visual indication that there is an identified issue that needs to be addressed before the review can be approved, see ["Set a task to Task Addressed or Not a Task" on page 199](#).

Note

If Swarm is configured to prevent approval of reviews with open tasks and a review has open tasks, the **Approve**, and **Approve and Commit** options will not be available for the review. This option is configured by an administrator, see ["Prevent Approve for reviews with open tasks" on page 411](#).

To approve, or approve and commit a review with open tasks, you must address the tasks first and then set them to **Task Addressed**, or **Not a Task**, see ["Set a task to Task Addressed or Not a Task" on page 199](#) for details.

If you **Approve** or **Approve and Commit** a review that has open tasks with Swarm, a warning message is displayed in the **Update Review** dialog. The warning is only advisory, either click **Cancel** and address the open tasks or click **Approve** to approve the review. Archived open tasks will not trigger the warning message.

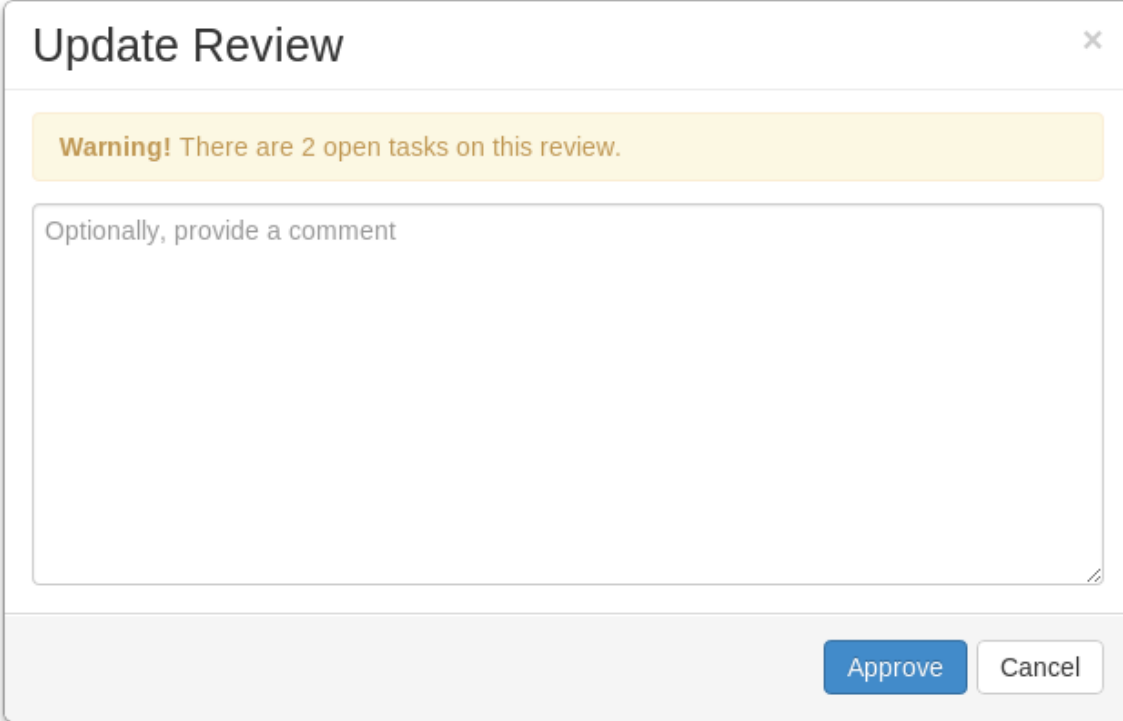

The image shows a dialog box titled "Update Review" with a close button (X) in the top right corner. Below the title bar is a yellow warning banner that reads "Warning! There are 2 open tasks on this review." Underneath the banner is a large text input area with the placeholder text "Optionally, provide a comment". At the bottom right of the dialog box are two buttons: "Approve" (a blue button) and "Cancel" (a white button with a grey border).

Comment features

Comment notification delay

By default, comment notifications are delayed to allow reviewers to add or edit comments as they progress through a review without sending a notification for each individual comment on the review. Comment notifications are rolled up into a single notification and sent either manually by the reviewer, or automatically after the notification delay time has been exceeded.

The delay countdown is reset each time the reviewer adds or edits a comment on the review, by default the notification delay time is set to 30 minutes.

- If you are commenting on more than one review, each of the reviews that you are commenting on has its own notification delay countdown that only applies to the comments that *you* make on *that* review.
- If another reviewer is making comments on the same review as you, *that* reviewer has their own notification delay timer for *that* review.
- If you manually send a delayed comment notification, the notification will only contain the comments that *you* made on *that* review.

Tip

The comment notification delay does not delay the posting of the comments, only the comment notification is delayed.

Note

Comment notifications are only delayed for comments on reviews. Comments on commits or jobs produce notifications immediately.

Note

The notification delay time is a global configuration setting configured by the Swarm administrator, see [Comment notification delay](#).

Manually send the comment notification immediately:

1. Add or edit your comment as normal.
2. Click the **Post and Notify (X)** button to the right of the comment box.
Where **(X)** is the number of delayed comment notifications in the queue waiting to be sent, this number does not include the current comment you are working on.

Tip

- If you forget to click the **Post and Notify (X)** button, click the **Send All Notifications** button below your avatar on the review page to send all of the notification for the review immediately.
- Only the comments that you have made on this review are rolled up into the notification that is sent when you click **Post and Notify (X)** or **Send All Notifications**.

Reply to comments

By default, you can reply to comments, replies are displayed in a thread below the parent comment. Comment thread depth is set to 4 by default, this means you can have up to 4 levels of replies for a parent comment. The **Reply** link is not displayed for replies at or above the maximum thread depth set for Swarm. If the parent comment is archived, replies are archived with the parent, see "[Archiving comments](#)" on page 210.

Note

Comment replies can be disabled, and the thread depth can be increased or reduced by a Swarm administrator, see "[Comment threading](#)" on page 369.

Tip

If the thread depth is reduced by a Swarm administrator, earlier replies at a deeper level will continue to be displayed but you cannot reply to them.


To reply to a comment:

1. Click on the **Reply** link below the comment you are replying to.
2. Add your comment in the text area.
3. Click **Post**.

Files 1 **Comments** 4 **History** **Send All Notifications**


4 archived comments


jack.boone commented 6 months ago (edited)




```
+ * Returns the client object for the given client.
+ */
+client_t * get_client( int id )
+{
+  int r_cx = rpc_connect(srvr);
```

claire.brevia (revision 1) (on client.cc, line 13) commented 4 months ago
Don't we normally wrap the rpc_connect() call in a macro for sanity checking?
[Reply](#) - [Edit](#) - 1

 **steve.russell** (revision 1) (on client.cc, line 13) replied 4 months ago
We stopped doing that last release. It was a big performance hit.
[Reply](#) - 1

 **claire.brevia** (revision 1) (on client.cc, line 13) replied 4 minutes ago
Okay got it. Thanks
[Reply](#) - [Edit](#) -



Add a comment

Drop files here to attach them Emoji codes are supported

Flag as Task **Post and Notify (1)**

Emoji

Swarm comments support Emoji short-hand; when you save a comment, emoticon text like `:smile:` is displayed as: 😊. Hover your mouse over an Emoji emoticon to see a tooltip displaying the text short-hand for the emoticon:



For more information on Emoji, see [Emoji on Wikipedia](#). Emoji emoticons are listed in the [Emoji Cheat Sheet](#).

Links in comments

Whenever you include a URL in a comment, it is automatically made into a link. If the link points to an image, or a YouTube video, that resource is displayed at the end of the comment.

Code snippet from the first comment:

```

+<html>
+<head>
+<title>Testing Manipulation of CSS Precedence with Javascript</title>
+
+<script type="text/javascript" src="jquery-1.3.2.min.js"></script>
    
```

jack.boone (revision 1) (on test-00.txt, line 4) commented 29 minutes ago
 Do we want to use this version of jQuery? The latest version can be found here: <http://jquery.com>

Reply · ♥

jack.boone commented 4 minutes ago
 The Helix Swarm Overview: <https://www.youtube.com/watch?v=8fWNZqojycl>

Video player content:

Helix Swarm Overview

Review 12393

John_Wakeman authored this 3 minutes ago for release-1-0, last v...

Changed value for broken bolt ↕

+ Add Job

Tasks Reviewers

Files Comments History

#1: Change 12393 shelved into /!depot/Talkhouse/!E1Dcom/walkerbrns/common/widget

Ehnut.java

// Constants for state of nut

Comment attachments

Arbitrary files can be attached to comments. This is useful for sharing documents that are helpful in code reviews, such as screenshots of error conditions, reference code, etc.

Note

Swarm must be [configured to enable comment attachments](#). Once the configuration is complete, the comment area will include the following text **Drop files here to attach them**.

To attach a file to an open comment:

1. Drag the file from your file browser and drop it on the comment area.
Multiple files can be attached to a comment, either one at a time, or by dragging a group of files. Folders cannot be attached to comments.
2. The upload to Swarm starts immediately and progress is displayed below the comment.
 - **Blue Progress Bar:** the upload to Swarm is in progress.
 - **Green File Bar:** upload complete.
3. If you attach a file to the comment by mistake, you can remove it by clicking the **X** button on the **Green File Bar**.
4. Click **Post**.

The filename and file size is displayed in the comment for each attached file, click on the filename to view the file.


When comments are viewed in the **Comments** tab, image previews are displayed for the attached images.


Note

Image previews are only displayed in the **Comments** tab, they are not displayed when a comment is viewed in the **Files** tab.




Liking comments

As an authenticated user, you can *like* a comment by clicking the muted heart icon beneath the comment [about 16 hours ago](#) - .

When you like a comment, a [notification](#) is sent to the author of the comment, and the heart icon changes to red to indicate that you have liked the comment [about 16 hours ago](#) - **1** . The number of likes the comment has is displayed next to the heart icon. If a comment is edited, all of the likes for that comment are removed.

Hover your mouse pointer over the number of likes to display the usernames of everyone that has liked the comment:

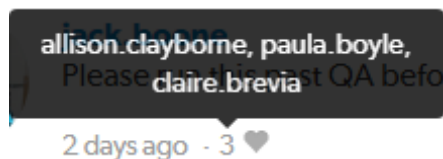


Click the heart icon again to *unlike* a comment.

Note

You cannot like/unlike a comment that has been archived.

Comment context

When comments are added to files in a review, on lines that have been changed, Swarm records several lines of context before the line receiving the comment. This helps makes sense of the comments should later changes remove those lines.

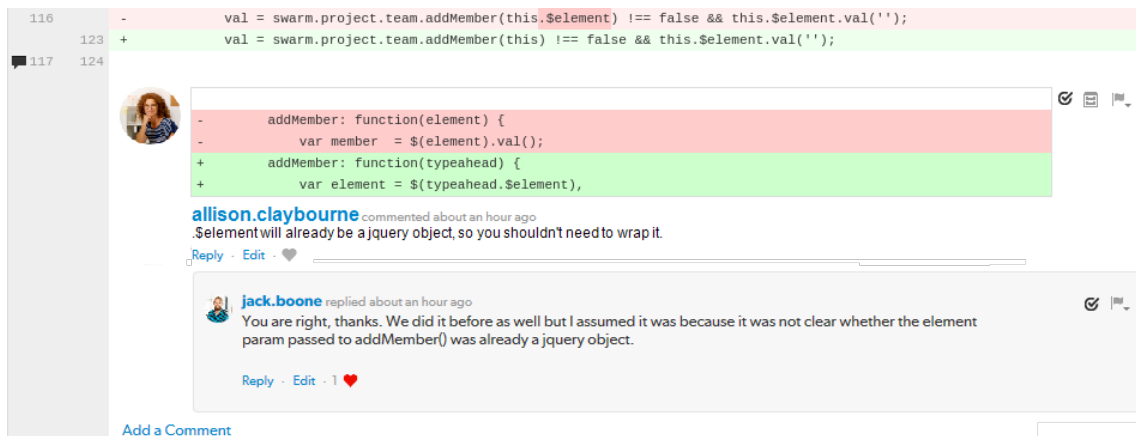


Each comment associated with that line has a record of the context, but only the first comment displays that context.

Mark comments as read

When you mark a comment as read, the comment is rolled up into a single line to save space and make it easier for you to find comments you have not read. The read flag is remembered independently for each user.

Mark a single comment as read:

1. Click the **Mark comment as read** button  at the top right of a posted comment.
2. The comment is rolled up into a single line to save space.


bruno commented 38 minutes ago (edited)   

Note

Marking a parent comment as read will not mark the child comments as read.

Mark all of the comments on a review as read:

1. Click the **Mark all comments read** button in the review heading.
2. All of the comments in the review are rolled up into single lines to save space.

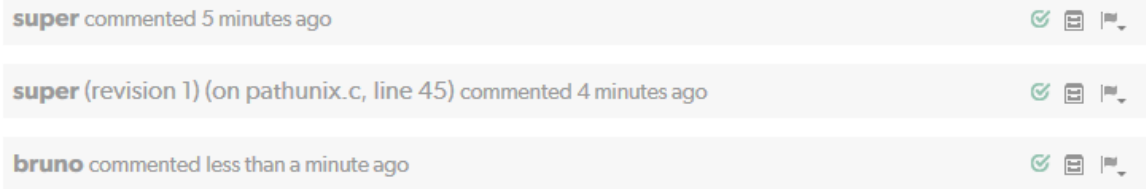**Tip**

Mark all comments read will mark all the comments as read including the description comments.

Mark comments as unread

Marking a comment as unread expands the comment so that you can view the comment content. If a comment is marked as read and the comment changes, Swarm will automatically clear the read flag so that you can see that the comment has changed. Changes that automatically mark a comment as unread are:

- Comment text is edited
- Comment attachments are added or removed
- Comment is marked as a task
- Task is reopened
- Comment or task is unarchived

Mark a single comment as unread:

1. Click the **Mark comment as unread** button  to the right of the comment.
2. The comment content is expanded.

Note

Marking a parent comment as unread will not mark the child comments as unread.

Mark all of the comments on a review as unread:


1. Click the **Mark all comments unread** button in the review heading.
2. The content of all of the comments in the review are expanded.

Tip

Mark all comments unread will expand the content of all the comments including the description comments.

Archiving comments


As a code review progresses, comments made on earlier versions of a file might become less useful. Archiving these comments tidies up the comment view and makes it easier to find the more important comments.

The **Archive** button  is only available for top level comments, if a comment has replies they are archived with the parent comment.


To archive a comment:

- Click the *Archive* button  at the top right of a posted comment.

Archived comments are hidden from view, the number of archived comments that exist for the review is displayed in the **archived comments** button at the top of the **Comments** tab.

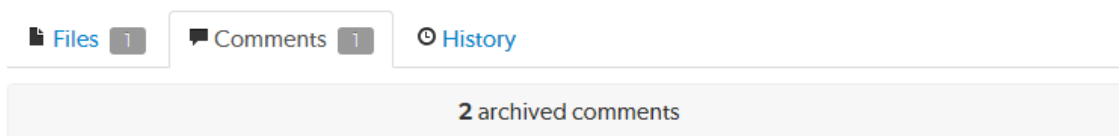

Click on the **archived comments** button to toggle the archive comment display on and off.

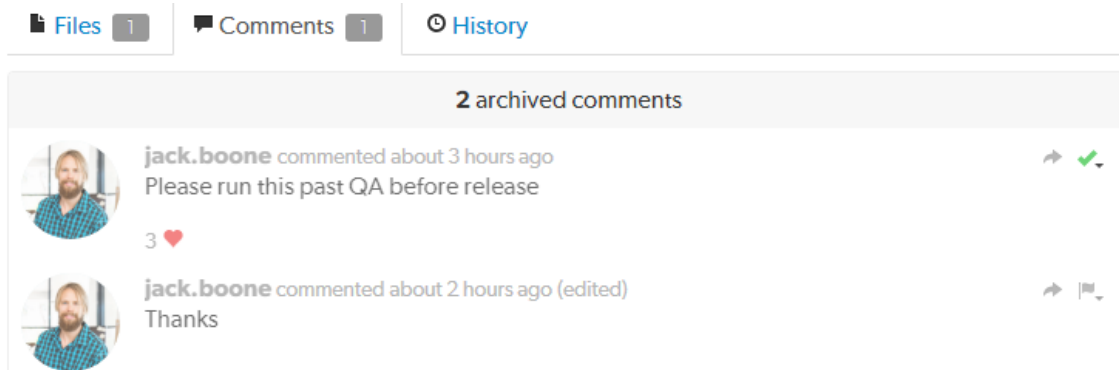



Restore comments

Archived comments can be restored. If archived comments have replies, the replies are also restored.

To restore archived comments:

1. Click the **archived comments** button at the top of the **Comments** tab to display all of the archived comments.

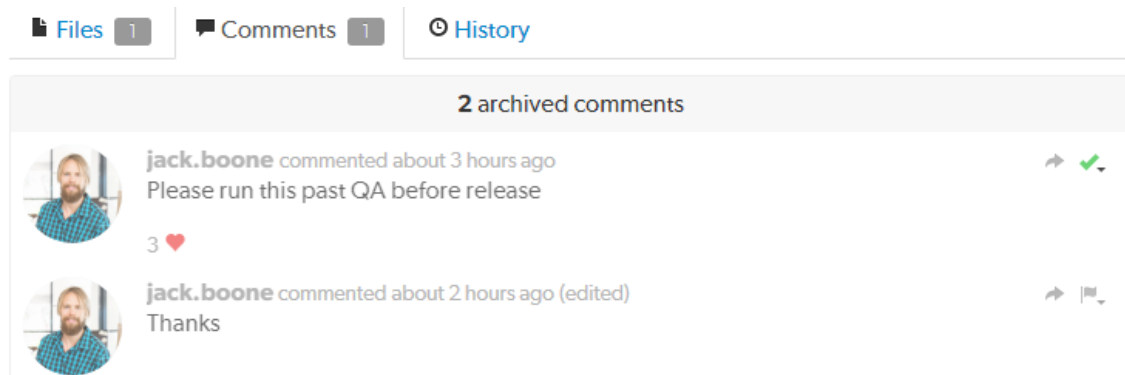

2. Find the comment you want to restore.
3. Click the **Restore** button  in the top right of the comment to restore it.


Users


Swarm's users are based on the users configured in the Helix Server.

- "Viewing your user profile" below
- "Viewing another user's profile" on page 218
- "Viewing another user's profile when you have admin or super user privileges" on page 219

Viewing your user profile

Display your own user profile when you are logged in by clicking on your userid at the top-right of the main toolbar and selecting **Profile**.

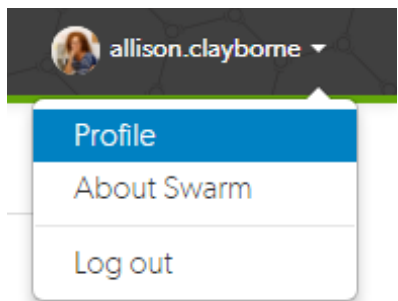

The user profile page displays your [avatar](#), your full name, your email address, an **Unfollow all projects and users for your-username** button, a list of users following your activity, the users or [projects](#) that you are following, and the list of projects of which you are an owner or member, including an eye icon () beside any private projects you belong to.

The screenshot shows a user profile for 'allison.clayborne'. At the top, there is a navigation bar with links for REVIEWS, PROJECTS, FILES, COMMITS, JOBS, GROUPS, and WORKFLOWS. Below this, the profile header includes the username 'allison.clayborne', a profile picture, and statistics: 2 FOLLOWERS, 1 FOLLOWING, and 3 PROJECTS. A red button labeled 'Unfollow all Projects and Users for allison.clayborne' is visible. The profile lists several projects: JPlugin (Owner, Member), Test Data (Member), and Mercury (Following). The main activity feed shows a list of recent actions, including review requests and code commits, each with a timestamp and an 'Add a comment' link.

Unfollow all projects and users for yourself

When you are viewing your own user profile, you can unfollow all projects and users that you are following.

Note

This action cannot be undone.

1. Click the **Unfollow all projects and users for *your-username*** button.
2. Click **OK** when the confirmation dialog is displayed to complete the unfollow action.
3. You will no longer be following any projects or users.

Activity tab

Click the **Activity** tab to display the [activity stream](#) for events you have created.

Activity

Shelves

Settings

Notifications

Reviews

Commits

Comments

Jobs

📡

allison.clayborne requested [review 185](#) for [jplugin:main](#) about a month ago

These browsers are no longer supported by the product and the code should be removed.

🗨 [Add a comment](#)

allison.clayborne requested [review 135](#) for [jplugin:main](#) about a month ago

Tidying up some of the code to fix some edge conditions. Also putting some support for future features in place. #review @@triage

🗨 [Add a comment](#)

allison.clayborne committed [change 134](#) into [jplugin:main](#) about a month ago

Tidying up some of the code to fix some edge conditions. Also putting some support for future features in place. #review @@triage

🗨 [Add a comment](#)

allison.clayborne requested [review 133](#) for [jplugin:main](#) about a month ago

Added setter for the buildParent flag so we can modifier it later.

🗨 [Add a comment](#)

allison.clayborne committed [change 132](#) into [jplugin:main](#) about a month ago

Added setter for the buildParent flag so we can modifier it later.

🗨 [Add a comment](#)

allison.clayborne committed [change 6](#) 2 months ago

Imported JPlugin project into repository.

🗨 [Add a comment](#)

Shelves tab

Click the **Shelves** tab to display a list of your shelved changelists.

Change	Description	Created		
1380317	#review-1380318 Update the coverage of My Reviews to cover the new look/behaviour. @ph...	4 days ago		View Review
1379450	Update the phone numbers listed in Swarm's contact page to match those (a...	5 days ago		Request Review
1378653	#review-1378654 Remove language indicating that Swarm is at an early stage. @pmclary s...	7 days ago		View Review
1378432	#review-1378433 Add coverage of the new p4 -> auto_create_url configuration item, whic...	7 days ago		View Review
1371898	#review-1371899 Update the admin configuration to capture the change in project settings...	26 days ago		View Review
1371895	#review-1371896 Remove the note fro the JIRA integration page about manual configuration...	26 days ago		View Review
1371884	#review-1371886 Update delayed notifications description to make it clear that the checkb...	26 days ago		View Review
1357393	#review-1357327 My tweaks to Jenny's review.	2 months ago		View Review

A *shelved* changelist is a pending changelist that has a copy of one or more files from within the changelist stored on the server. Shelved files are not versioned. If you update the shelved files, the update replaces any existing files on the changelist's shelf.

Note

Swarm can use multiple shelved changes to record the history of reviews. See "[Internal representation](#)" on page 253 for details.

Swarm uses shelved changelists as the basis of its code review feature. However, not all shelved changelists are reviews. Users may shelve files for other reasons, including ensuring that the Helix Server has a copy of work in progress, or as a way to move temporary work from one workspace to another.

Click **Request Review** to start a Swarm review for any shelved changelist that is not already involved in a review.

Click **View Review** to view the Swarm review associated with shelved changelists when a review has already started.

Important

By default, when you delete files from a shelved changelist, the files are not removed from the

associated review.

However, Swarm can be configured to remove files from a review when they are deleted from an associated shelf, see "[Process shelf file delete when](#)" on page 412. To delete a shelved changelist without removing all of the shelved files from the associated review, see "[Deleting shelves](#)" on page 281.

Do not use the Swarm user that is configured in the [Swarm configuration file](#) when deleting shelves, or deleting files from shelves. The Swarm logic processes the `shelf-delete` trigger event, if the event is invoked by the Swarm user it is rejected. The delete operations will fail.

Settings tab

The **Settings** tab allows you to configure how [diffs](#) are initially displayed when you view them, and how time is displayed by Swarm.

Note

Defaults for these options are configured by the Swarm administrator, see [Users](#). The defaults set by the Swarm administrator are used until you change your settings.

[Activity](#)
[Shelves](#)
[Settings](#)
[Notifications](#)

Profile Settings Reset to default

Reviews

Sets default values for how diffs are displayed on all reviews.

Show comments in files	<input checked="" type="checkbox"/>
View diffs side-by-side	<input checked="" type="checkbox"/>
Show space and newline characters	<input type="checkbox"/>
Ignore whitespace when calculating differences	<input type="checkbox"/>

Time Display

Sets how you would like to display time across Swarm.

Display the time in Timestamp ▼

Save
Cancel

Toggle the **Reviews** settings to control how diffs are initially displayed on changelists and reviews by default.

Choose the **Time Display** settings to configure how time is displayed by Swarm. You can configure Swarm to display timestamps based on your local machine browser time, or by how long ago events happened.

Tip

If timestamp is selected, the date format used by Swarm matches the date format configuration of the local machine browser.

Click the **Save** button to save the settings. Click **Reset to default** to reset the settings back to system defaults.

Notifications tab

The **Notifications** tab allows you to configure which notifications you receive when events occur within Swarm. This allows you to limit the number of emails you receive to just those you are interested in. The settings apply across all projects.

Note

Defaults for these options are configured by the Swarm administrator. Your Swarm administrator may force some of these options to on or off, see "[Global settings](#)" on page 395.

[Activity](#)
[Shelves](#)
[Settings](#)
[Notifications](#)

Adjust when notifications are sent to you about reviews that you're associated with (as an author, reviewer, project member or moderator).

Email me when: [Reset to default](#)

Check all

I change the state of a review	<input type="checkbox"/>
I am the author, and	
a review is requested	<input checked="" type="checkbox"/>
files in the review are updated	<input checked="" type="checkbox"/>
tests on the review have finished	<input checked="" type="checkbox"/>
a vote is cast on a review	<input checked="" type="checkbox"/>
the state of the review changes	<input checked="" type="checkbox"/>
a review or change is committed	<input checked="" type="checkbox"/>
a comment is made on the review	<input checked="" type="checkbox"/>
a comment on the review is updated	<input checked="" type="checkbox"/>
Someone likes one of my comments	<input checked="" type="checkbox"/>
I am a member, and	
a review is requested	<input checked="" type="checkbox"/>
a review or change is committed	<input checked="" type="checkbox"/>
I am a reviewer, and	
files in the review are updated	<input checked="" type="checkbox"/>
tests on the review have finished	<input checked="" type="checkbox"/>
a vote is cast on a review	<input checked="" type="checkbox"/>
the state of the review changes	<input checked="" type="checkbox"/>
someone joins or leaves the review	<input checked="" type="checkbox"/>
a review or change is committed	<input checked="" type="checkbox"/>
a comment is made on the review	<input checked="" type="checkbox"/>
a comment on the review is updated	<input checked="" type="checkbox"/>
I am a moderator, and	
files in the review are updated	<input checked="" type="checkbox"/>
tests on the review have finished	<input checked="" type="checkbox"/>
a review or change is committed	<input checked="" type="checkbox"/>

[Save](#) [Cancel](#)

Toggle notifications for each event on or off to control whether you receive an email when that event occurs.

Click the **Save** button to save the settings. Click **Reset to default** to reset the settings back to system defaults.

Viewing another user's profile

View the profile pages of other users displayed anywhere in Swarm by clicking on their [avatar](#), [userid](#), or by visiting the URL: `https://myswarm.url/users/userid`.

Note

When viewing another user's profile page you can see the user's **Settings** tab but you cannot make changes to it.

Note

Currently, Swarm does not provide an overall list of users.

Follow or unfollow the user

- **If you are not following the user:** click the **Follow** button below the user's avatar to start following the user.
- **If you are following the user:** click the **Unfollow** button below the user's avatar to stop following the user.

alex.randolph

Activity Shelves Settings Notifications Reviews Commits Comments Jobs

alex.randolph commented on review 240 (client.cc, line 5) for mercury:dev
I agree with @claire.brevia 5 days ago
7 comments

alex.randolph edited a comment on review 113 (test-17.txt, line 2)
Thanks, can you have this done by the end of the day? 12 days ago
6 comments

alex.randolph commented on review 113 (test-17.txt, line 2)
@steve.russell Thanks, can you have this done by the end of the day? 13 days ago
6 comments

alex.randolph made their vote required on review 236 for mercury:main
Need to be able to lookup a user id based on its username. 2 months ago
Need to cope with the situation where an alias is returned instead,
and go find the real u...
Add a comment

alex.randolph cleared their vote on review 236 for mercury:main
Need to be able to lookup a user id based on its username. 2 months ago
Need to cope with the situation where an alias is returned instead,
and go find the real u...
Add a comment

alex.randolph voted up review 236 for mercury:main
Need to be able to lookup a user id based on its username. 2 months ago
Need to cope with the situation where an alias is returned instead,
and go find the real u...
Add a comment

FULL NAME
Alex Randolph

EMAIL ADDRESS
alex.randolph@nowhere.xxjzj.com

FOLLOWING
1 user

PROJECTS
Test Data Member
Mercury Member

0 FOLLOWERS 1 FOLLOWING 2 PROJECTS

Follow

Viewing another user's profile when you have admin or super user privileges

View the profile pages of other users displayed anywhere in Swarm by clicking on their *avatar*, *userid*, or by visiting the URL: `https://myswarm.url/users/userid`.


Unfollow all projects and users for another user

When a user has been removed from the Helix Server but they are still following projects and users, it is useful to be able to remove all of their follows. This helps to keep the project and user follower lists up to date.

Warning

This action cannot be undone.

1. Click the **Unfollow all projects and users for *username*** button located below the user's email address.
2. Click **OK** when the confirmation dialog is displayed to complete the unfollow action.
3. The user will no longer be following any projects or users.

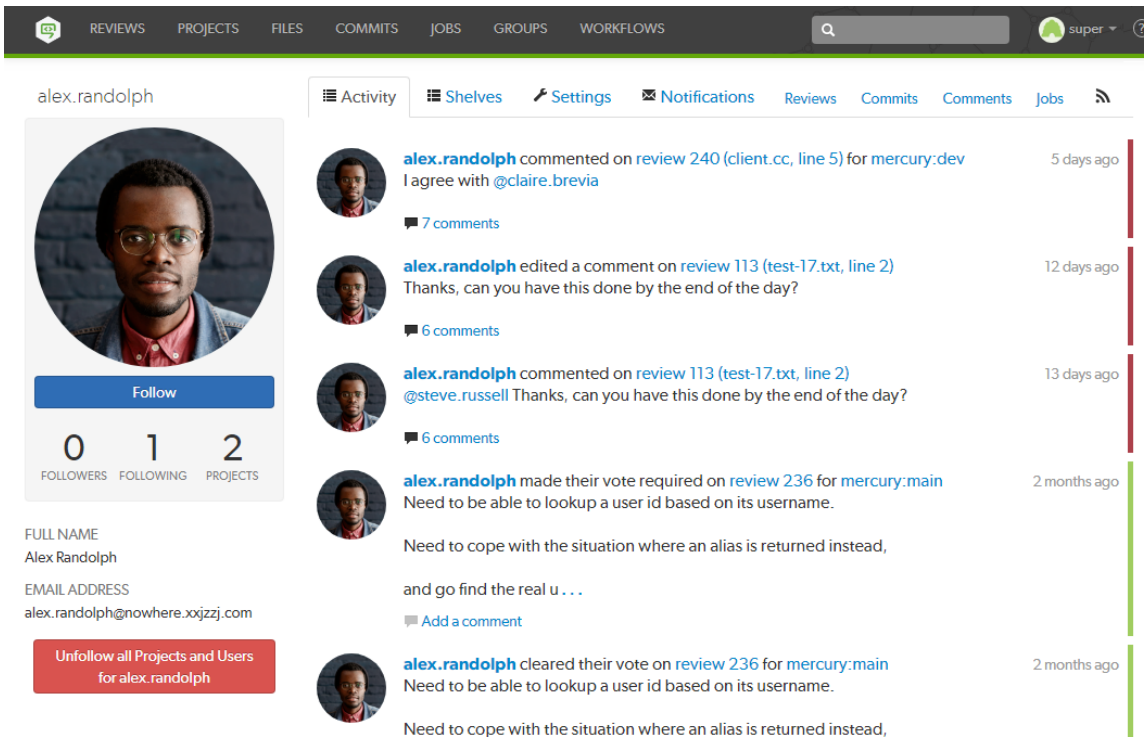

Groups

Groups are a feature of Helix Server that makes it easier to manage permissions for users.

It is important to be aware of certain aspects of Helix Server groups:

- Groups can have both users and sub-groups. A user that is a member of a sub-group is also a member of the parent group.
- Groups have owners, but owners are not members of their groups. A group owner can be added as a member of a group.
- Groups can be created by users with *super* privileges in Helix Server (p4d). If p4d is at version 2012.1 or newer, users with *admin* privileges can also add groups.
- Groups can be edited by their owners, or by users with *super* privileges in Helix Server.

- Groups have a separate namespace from users; you can have a user named `fish` that is a member of a group named `fish`.
- Groups can be project moderators
- Groups can be reviewers, see [Review display](#) and [@@mention](#) for details.
- You can `@mention` a group in a code review comment to ensure the mentioned group receives [notifications](#) of code review events. This also creates a link that displays the group's details when clicked. See [@@mention](#) for details.
- Groups cannot be project owners.

More information on adding, editing, and removing groups is included in the ["Groups" on page 305](#) chapter.

Listing groups

Begin browsing groups by clicking the **Groups** link in the main toolbar.

Name	Description	Owners	Members
Marketing marketing	Marketing team		3
triage	Triage team.		5
docs	Docs team		3
swarm-group	Swarm group		1
swarm-support	Swarm support team		3

For each group, the group's name, description, list of owner avatars, and a membership count (which has a darker background when you are a member). Click on a group name to display details for that group.

The groups listing is sorted by multiple criteria:

- Groups that you own, or belong to, are listed first. A thicker row border indicates where your group ownership/membership ends; you are not an owner/member of any group below the thicker border.
- Groups are then sorted by name.

You can search available groups by entering some text in the **Search** field and clicking **Search**. Any group names or descriptions that match the entered text are displayed.

Name	Description	Owners	Members
swarm-group	Swarm group		1
swarm-support	Swarm support team		3

If you have *super* privileges in Helix Server (P4D), or have admin privileges in P4D version 2012.1 or newer, Swarm displays the **Add Group** button. Click **Add Group** to add a new group.

Note

If your Helix Server has a large number of groups, the time required to display the list of groups might be notable.

Viewing a group

View a specific group by clicking on a linked group name, or by visiting the URL:
<https://myswarm.url/groups/group-id>

When Swarm displays a group, the presentation is similar to:

docs

Activity | Reviews

Activity

- paula.boyle** updated files in [review 249 \(revision 8\)](#) for `jplugin:main` Adding description to P4Tickets 7 days ago [Add a comment](#)
- paula.boyle** updated files in [review 249 \(revision 7\)](#) for `jplugin:main` Adding description to P4Basecredentials and P4Credentials 7 days ago [Add a comment](#)
- paula.boyle** updated files in [review 249 \(revision 6\)](#) for `jplugin:main` Adding description to P4Basecredentials and P4Credentials 7 days ago [Add a comment](#)
- paula.boyle** updated files in [review 249 \(revision 5\)](#) for `jplugin:main` Minor update in description of P4Password 7 days ago [Add a comment](#)
- paula.boyle** updated files in [review 249 \(revision 4\)](#) for `jplugin:main` Adding description to P4Credentials & P4CredentialsImpl 7 days ago [Add a comment](#)
- paula.boyle** updated files in [review 249 \(revision 3\)](#) for `jplugin:main` Adding description to P4Basecredentials and P4Credentials 7 days ago [Add a comment](#)
- paula.boyle** requested [review 249 \(revision 1\)](#) for `jplugin:main` Adding description to P4Credentials & P4CredentialsImpl 7 days ago [Add a comment](#)

Reviews | Commits | Comments | Jobs |

Docs team

1 OWNER 3 MEMBERS

EMAIL ADDRESS
docs.team@nowhere.xxzzj.com

OWNERS

MEMBERS

The information presented in the group display includes:

- In the left sidebar:
 - The group's name.
 - The group's avatar, if it has one.
 - The group's description, if it has one.
 - The count of the group's owners and members.
 - The group's email address, if it has one
 - The avatars of the group's owners.
 - The avatars of the group's members.
- Any events generated by a group member is associated with the group, and appears in the right-hand area as an [activity stream](#).

Click the **Reviews** link in the group toolbar to display the [review list](#) associated with the group, which includes all reviews authored by any of the group's members.

Projects

A Swarm project is made up of a group of Helix Server [users](#) who are working together on one or more codelines within the Helix Server. A project's definition includes one or more branches of code, and optionally a job filter, [automated test integration](#), and [automated deployment](#). This section provides an introduction to the interactions users have with projects. For details about managing projects, see "Projects" on page 313.

Listing projects

To view a list of projects, click the **Projects** link in the main toolbar.



The screenshot shows the Helix Server interface for listing projects. The top navigation bar contains links for REVIEWS, PROJECTS (which is the active tab), FILES, COMMITS, JOBS, GROUPS, and WORKFLOWS. A search bar and a user profile for 'allison.clayborne' are also present. The main content area is titled 'Projects' and features a search input, a '+ Add Project' button, and two tabs: 'My Projects' and 'All Projects'. Below the tabs, four project cards are displayed:

- jPlugin**: A Java plugin for continuous integration. (3 items)
- Mercury**: Mercury project for code management. (8 items)
- Swarm**: Beautiful code review for your beautiful code. (5 items)
- Test Data**: This project contains all of the test data for the web-based products. (3 items)

Logged-in users can choose which projects to display by clicking on the **My Projects** tab or the **All Projects** tab. Anonymous users only see the public projects, the **My Projects** tab is not available to anonymous users:

- The **My Projects**: tab lists all of the projects that you are an owner of or a member of.
- The **All Projects**: tab lists all of the available projects.

Tip


- The **Project Owner** icon  is displayed for projects you own.
- The **Private Project** icon  is displayed for private projects you are authorized to view. For details, see "[Private projects](#)" on page 228.
- The number in the icon to the right of the project name displays the total number of members for the project.

Search project names and project descriptions

You can search for Swarm project names and for the content of the project description from the projects page:

1. Enter text in the search box.
2. Click **Search**.

Any project names, and descriptions that match the search text are displayed in the project tab:

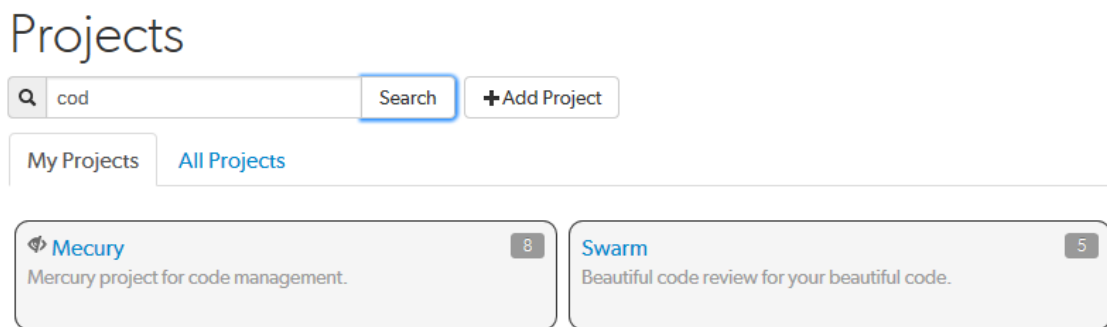**Tip**

Switch to the other project tab to display search results for that tab.

Viewing a project

View a project by doing one of the following:

- Click on the project name in the projects list on the Swarm **Projects** page.
- Click on the project name or branch identifier in an [activity stream](#).
- Visit the URL: **`https://myswarm.url/projects/project-name`**

Overview tab

The project **Overview** tab shows a description of the project.

Important

The project's **Overview** tab is only displayed if there is a **README .md** in the project's mainline.

The **README .md** file can contain Markdown text, allowing a formatted description of the project to be provided. For a description of the type of formatting that is supported, see "[Markdown in projects](#)" on page 248. For details on how to configure the mainline of a project, see "[Mainline branch identification](#)" on page 392.

The screenshot shows the Jenkins Overview tab for the 'P4 Plugin' project. At the top, there is a navigation bar with tabs for 'JPlugin', 'Overview' (selected), 'Activity', 'Reviews', 'Files', 'Commits', and 'Jobs'. Below the navigation bar, the page is divided into two main sections. On the left, there is a sidebar containing:

- An 'About' section with a description: 'A Java plugin for continuous integration.' and a 'Follow' button.
- Statistics: 3 MEMBERS, 1 FOLLOWER, and 2 BRANCHES.
- OWNERS: A list of one owner with a profile picture.
- MODERATORS: A list of one moderator with a profile picture.
- MEMBERS: A list of three members with profile pictures.
- FOLLOWERS: A list of one follower with a profile picture.
- BRANCHES: A list with 'MAIN' (highlighted in blue) and 'CANDIDATE'.

 On the right, the main content area displays:

- The title 'P4 Plugin' and a subtitle 'Jenkins plugin for a Perforce Helix Versioning Engine (P4D)'.
- A 'Contents' section with links to 'Release notes', 'Setup guide', 'Notes page', and 'Jenkins page'.
- A 'Requirements' section with a list of requirements: 'Jenkins 1.642.3 or greater.', 'Helix Versioning Engine 2012.1 or greater.', 'Minimum Perforce Protection of `open` for the Jenkins user.', and 'Review Build feature requires Swarm 2014.2 or greater.'.
- An 'Install' section with a list of four steps:
 - Open Jenkins in a browser; e.g. http://jenkins_host:8080
 - Browse to 'Manage Jenkins' --> 'Manage Plugins' and Select the 'Available' tab.
 - Find the 'P4 Plugin' or use the Filter if needed
 - Check the box and press the 'Install without restart' button
- A note: 'If you are unable to find the plugin, you may need to refresh the Update site.'
- A list of three steps for installation:
 - Select the 'Advanced' tab (under 'Manage Plugins')
 - Press the 'Check now' button at the bottom of the page.
 - When 'Done' go back to the update centre and try again.

The following information is displayed in the project sidebar:

- A short description of the project
- A **Follow** button, click to follow the project. This button is not available if you are a member of the project.
- A list of project owners
- A list of project moderators
- A list of project members

- A list of project followers
- A list of the branches defined for the project

Activity tab

The project **Activity** tab shows the [activity stream](#) for the project

The screenshot displays the 'Activity' tab for a project. The top navigation bar includes 'JPlugin', 'Overview', 'Activity' (selected), 'Reviews', 'Files', 'Commits', and 'Jobs'. The left sidebar contains project information: 'About' (A Java plugin for continuous integration), a 'Follow' button, 3 members, 1 follower, and 2 branches. Below this are lists for Owners, Moderators, Members, Followers, and Branches (MAIN, CANDIDATE). The main activity stream shows a list of updates by 'paula.boyle' and 'alex.randolph' with timestamps ranging from 6 days ago to 2 months ago.

The following information is displayed in the project sidebar:

- A short description of the project
- A **Follow** button, click to follow the project. This button is not available if you are a member of the project.
- A list of project owners
- A list of project moderators
- A list of project members
- A list of project followers
- A list of the branches defined for the project

Reviews tab

The project **Reviews** tab shows a list of code reviews specific to the project.

ID	Description	Branches	Created				
249	Adding description to P4Credentials & P4CredentialsImpl	main	6 days ago	0	0/0		
185	These browsers are no longer supported by the product and the code should be removed.	main	7 months ago	0	1/0		
135	Tidying up some of the code to fix some of the edge conditions. Also putting some support...	main	7 months ago	0	1/0		
133	Added setter for the buildParent flag so we can modifier it later.	main	7 months ago	0	0/0		

For more details on browsing, filtering, and searching reviews, see ["Reviews list" on page 256](#).

Files tab

The project **Files** tab shows a list of files for the project, starting with a folder view representing each branch. Branches are designated with the *branch* icon

Name	Modified	Size
main		
candidate		

The project's *main* branch, identified by using a name such as *main*, *mainline*, *master*, *trunk*, is sorted to the top of the list of branches and appears in bold. The list of names can be configured, see ["Mainline branch identification" on page 392](#) for details.

For more information on browsing files, see ["Files" on page 175](#).

Commits tab

The project **Commits** tab shows a list of changes made to the project.

Change	User	Description	Committed
241	steve.russell	Created candidate branch for the plugin, so that we know what is ready to be released to...	5 months ago
134	allison.clayborne	Tidying up some of the code to fix some edge conditions. Also putting some support for f...	7 months ago
132	allison.clayborne	Added setter for the buildParent flag so we can modifier it later. #review-133	7 months ago
8	paula.boyle	Added in check to make sure that we are not setting a null review. There have been proble...	7 months ago
6	allison.clayborne	Imported JPlugin project into repository.	7 months ago

For more details on history browsing, see ["Commits" on page 182](#).

Jobs tab

The project **Jobs** tab shows a list of jobs associated with the project.

Important

The **Jobs** tab is only displayed when the project configuration includes a *job filter*. See ["Add a project" on page 313](#) for details.


Job	Status	Reported By	Description	Modified Date
job086341	Fixed	p4dtguser	Enable "require_login" by default. This is due to the way the new Groups feature interacts with anon...	37 minutes ago
job086335	Open	p4dtguser	[doc] Update coverage/mentions of require_login to note that it is now enabled by default. This r...	about 4 hours ago

For more details on browsing and searching jobs, see ["Jobs" on page 184](#).

Private projects

Private projects, introduced in Swarm 2016.2, provide a way to make specific projects and their activity less visible to Swarm users. When a project is made private, only the projects owners, moderators, and members, plus users with *super* privileges in the Helix Server, can see the project, its activity streams, and ongoing reviews.

If you are logged in as an owner, moderator, or member of a private Swarm project, that project appears on the Swarm project page with an eye icon to indicate that it is private and has limited visibility:

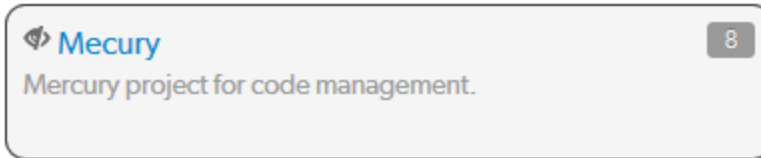

Similarly, the eye icon appears beside the project's title when viewing the project. When you hover your mouse over the eye icon, a tooltip appears indicating that this project is indeed private.

Caveats

The following are important caveats regarding private projects:

- While Swarm can mask the existence of projects, their activity, and reviews, Swarm honors each user's access to files within the Helix Server. This means that users that have access to the files in a private project's branches can browse to those branch paths within the depot and see the files and any committed changes.
- If you need to prevent access to important files, your Helix Server administrator is required to manage the protections table accordingly. For details, see [Authorizing Access](#) in the *Helix Core Server Administrator Guide: Fundamentals*.
- It is possible for a user to start a review that touches files that belong to a private project. If the user is not a member, owner, or moderator of the private project, or does not have super privileges in the Helix Server, they cannot participate in the review.
- If a user is not a member, owner, or moderator of a private project, or does not have super privileges in the Helix Server, and they are added as a review participant (via an "[@mention](#)" on [page 241](#) or by editing a review's participants) to a review containing files within the private project's branches, that user cannot participate in the review: the user cannot see the review, its files, or comments. Due to limitations in how Swarm sends email notifications, such users could still receive notifications for reviews they cannot participate in.
- Notifications usually include links and mentions of the associated projects. Notifications involving private projects are filtered to remove any references to those private projects.

Workflows - Technology preview feature

Warning

Workflow is a [technology preview feature](#) and is disabled by default.

A workflow can be applied to a project or project branch to ensure that changelists and code reviews in the project/branch follow the rules specified in that workflow.

- Swarm workflows can be created by any Swarm user.
- Shared Swarm workflows can be viewed by any Swarm user.

- Shared Swarm workflows can be applied to a project or project branch by any Swarm user that is authorized to edit the project.

Important

The Swarm administrator can enforce a minimum workflow rule setting (by setting the rule to **policy** mode) for the entire Helix Core Server. If a project or project branch has an associated workflow, the global rule is merged with the workflow rule and the most restrictive setting is used.


- For more information about how workflow rules are merged, see "[Merging multiple workflows](#)" on page 345.
- For more information about setting global workflow rules, see "[Workflow global rules - Technology preview feature](#)" on page 445.

This section provides an introduction to listing, searching, and viewing workflows.

- For an overview of workflows, see "[Workflow overview](#)" on page 338.
- For instructions on how to add a workflow, see "[Add a workflow](#)" on page 348.
- For instructions on how to delete a workflow, see "[Delete a workflow](#)" on page 353.
- For instructions on how to add a workflow to a project, and a project branch, see "[Add a project](#)" on page 313.

Listing workflows

To view a list of workflows, click the **Workflows** link in the main toolbar.

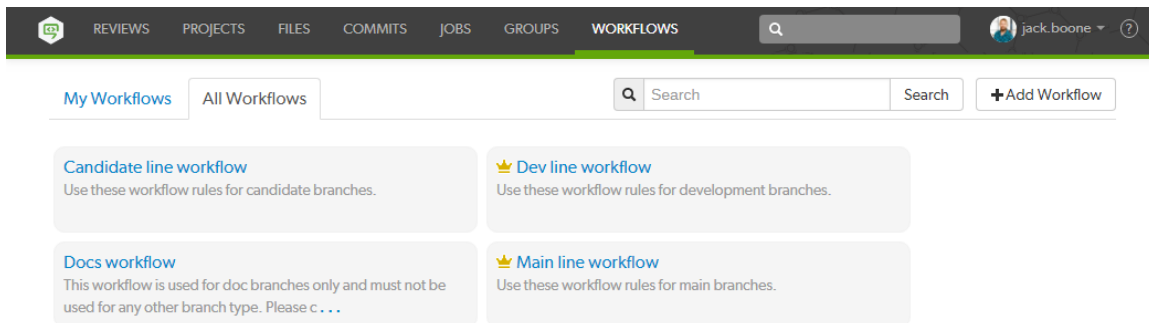

Logged-in users can choose which workflows to display by clicking on the **My Workflows** tab or the **All Workflows** tab. Anonymous users only see the shared workflows, the **My Workflows** tab is not available to anonymous users:

- The **My Workflows:** tab lists all of the workflows that you are an owner of.
- The **All Workflows:** tab lists all of the shared workflows, and workflows that you are an owner of.

Tip


The **Workflow Owner** icon  is displayed for workflows you own.

Search workflow names and workflow descriptions

You can search for Swarm workflow names and for the content of the workflow description from the workflows page:

1. Enter text in the search box.
2. Click **Search**.

Any workflow names, and descriptions that match the search text are displayed in the workflows tab:

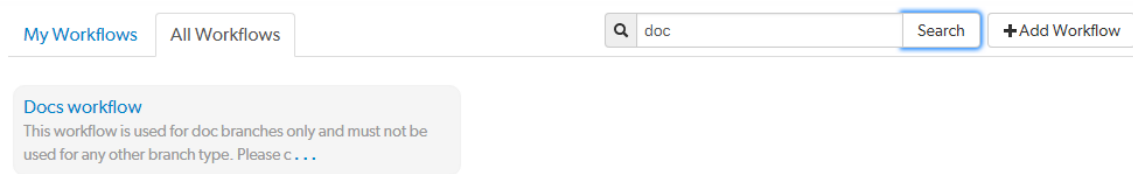

My Workflows All Workflows Search + Add Workflow

Docs workflow
This workflow is used for doc branches only and must not be used for any other branch type. Please c...

Tip

Switch to the other workflow tab to display search results for that tab.

Viewing a workflow that you own

To view workflow details:

1. Click the **Workflows** link in the main toolbar.
2. Click on the name of the workflow you want to view.

For information about editing the workflow, see "[Add a workflow](#)" on page 348.

Note

You can edit a workflow if you are the owner of the workflow, or if you have *super* user rights.

Candidate line workflow ✕

Name
Candidate line workflow

Description
Use this workflow for candidate branches.

Rules ⓘ

- On commit without a review: Reject
- On commit with a review: Reject unless approved
- On update of a review in an end state: Reject
- Count votes up from: Members
- Automatically approve reviews: Based on vote count

Owners
Add an Owner

Individuals:
bruno ✕

Shared with others

▼ 2 projects use this workflow

- ▼ jPlugin
Branches
1. Candidate
- ▼ Test Data
Branches
1. Candidate branch

Save Cancel Delete

Tip

- The project count does not include project branches.
- If the workflow is associated with a [Private project](#), the private project name is only displayed if you are authorized to view it. Private projects are included in the project count.

Viewing a shared workflow that you do not own

Shared workflows can be viewed and used by all Swarm users.

To view workflow details:

1. Click the **Workflows** link in the main toolbar.
2. Click on the name of the workflow you want to view.

Main line workflow
✕

Name

Description

Use this workflow for main branches.

Owners

Individuals:

abigail7

Shared with others

▼ 2 projects use this workflow

▼ jPlugin

Branches

1. Main

Rules ⓘ

On commit without a review	Create a review ▼
On commit with a review	Reject unless approved ▼
On update of a review in an end state	Reject ▼
Count votes up from	Anyone ▼
Automatically approve reviews	Based on vote count ▼

Tip

- The project count does not include project branches.
- If the workflow is associated with a [Private project](#), the private project name is only displayed if you are authorized to view it. Private projects are included in the project count.

Notifications

Provided you have entered a working email address for your userid in Helix Server, Swarm sends email notifications to you when various events take place. The table below shows the notifications sent if all of the project, group, and user notifications are enabled, this is the default behavior.

Note

The system-wide default notifications can be changed by the system owner. See "[Global settings](#)" on [page 395](#) for details.

Tip

Many of the notifications can be disabled, this allows project, group, and user notifications to be customized to limit the number and type of notifications sent.

- Project notifications are configured on the [project settings tab](#).
- Group notifications are configured on the [group Notifications tab](#).
- User notifications are configured on the [user Notifications tab](#).

Legend:

A = Author	PM = Project member or project member group	✓ = role user/group receives notification
R = Reviewer or reviewer group	PF = Project follower	✗ = role user/group does not receive notification
M = Moderator or moderator group	AF = Author follower	∅ = role not included for this event
GM = Group member	CA = Comment author	

Event	Notification sent to one of these roles...								
	Event by you?	A	R	M	GM	PM	PF	AF	CA
A review is committed in Swarm	✗	✓	✓	✓ 3	✓ ⁴	✓ 1	✓ ¹	✗	∅
A review is committed outside of Swarm	✗	✗	✓	✓ 3	✓ ⁴	✓ 1	✓ ¹	✗	∅
A change is committed outside of Swarm (see "(1) Committed change notifications" on page 237)	✗	✗	∅	✓ 3	✓ ⁴	✓ 1	✓ ¹	✓ ¹	∅
A review is started (see "(2) Review start notifications" on page 237)	✓	✓	✓	✓ 3	✓ ⁴	✓ 2	✗	✗	∅
A reviewer casts a vote	✓	✓	✓ 5	✗	✓ ⁴	✗	✗	✗	∅

Event	Notification sent to one of these roles...								
	Event by you?	A	R	M	GM	PM	PF	AF	CA
A review's state changes	✗	✓	✓ 5	✗	✓ ⁴	✗	✗	✗	∅
A review's reviewers are changed	✗	✓	✓ 5	✗	✓ ⁴	✗	✗	✗	∅
A review's files are updated	✓	✓	✓ 5	✗	✓ ⁴	✗	✗	✗	∅
A review's automated tests have finished (see "(7) Tests have finished" on page 239)	✗	✓	✓	✓	✓ ⁴	✗	✗	✗	∅
A review's description is changed	✗	✗	✗	✗	✗	✗	✗	✗	∅
A review comment is created (see "Comment notification delay" on page 202).	✗	✓	✓ 5	✗	✓ ⁴	✗	✗	✗	✗ 6
A review comment is edited (see "Comment notification delay" on page 202).	✗	✓	✓ 5	✗	✓ ⁴	✗	✗	✗	✗ 6
A committed change comment is created	✗	✓	∅	✗	✓ ⁴	✗	✗	✗	∅ ⁶
A committed change comment is edited	✗	✓	∅	✗	✓ ⁴	✗	✗	✗	∅ ⁶
Someone joins or leaves a review	✗	✓	✓ 5	✗	✓ ⁴	✗	✗	✗	∅

Event	Notification sent to one of these roles...								
	Event by you?	A	R	M	GM	PM	PF	AF	CA
Someone likes a comment you wrote	✗	✗	✗	✗	✗	✗	✗	✗	✓ ⁵
You like a comment you wrote	✓	✗	✗	✗	✗	✗	✗	✗	✗

Any custom modules added to Swarm may also send notifications.

Important
 Email delivery for events related to restricted changes is disabled by default. See "[Restricted Changes](#)" on page 422 for details on how to enable restricted change notifications.

@mention notifications

Users: @mention

Using an @mention in a review, changelist, or comment causes the referenced userid to receive a notification and be included in any future notifications regarding the associated file or review.

When a comment is added to a job, Swarm sends a notification to users listed in user fields in the job, users @mentioned in the job description, and the authors of any associated changes.

Note
 Typically, you would not receive a notification when you @mention yourself. @mentions themselves do not trigger notifications; they inform who receives notifications. See "[notify_self](#)" on page 381 for details on how to enable self notification.

Groups: @@mention

Using an @@mention in a review, changelist, or comment causes the referenced groupid members to receive a notification and be included in any future notifications regarding the associated file or review.

When a comment is added to a job, Swarm sends a notification to groups listed in group fields in the job, groups @@mentioned in the job description, and the authors of any associated changes.

Note

- **Group mailing list enabled:** notifications are sent to the group email address.
- **Group mailing list disabled:** notifications are sent to the group members individual email addresses.

(1) Committed change notifications

Notifications for committed changes are sent by default, but can be disabled or require users to opt-in. Please see the [notification configuration](#) and [adding a project](#) for more details.

When committed change notifications are configured for opt-in, you need to copy the configuration's special depot path to the **Reviews:** field in your user spec within Helix Server. Once you have done so, Swarm can send you committed change notifications for any change that matches a depot path specified in the **Reviews:** field.

Update Reviews with p4

1. Begin editing your user spec:

```
$ p4 user
```

2. Edit the **Reviews:** field to include the special depot path, plus any other paths you want to receive notifications for.
3. Save the spec.

Update Reviews with P4V

1. Select **Connection > Edit Current User**.
2. Edit the **Reviews:** field to include the special depot path, plus any other paths you want to receive notifications for.
3. Click **OK**.

(2) Review start notifications

By default, notifications are sent when a review is started, but can be disabled for a project, group, or user.

Note

If a user or group is added as a reviewer when a new review is created, the reviewer will be notified that the review has been started. This initial notification cannot be muted.

(3) Moderator notifications

Moderators and moderator groups are associated with specific project branches. Moderators receive notifications for reviews and commits against the branches they are associated with.

(4) Group member notifications

Groups can be members of a project, moderators of a project branch, and reviewers of a review. The notifications that group members receive will depend on, the role the group has and the group notification settings that are configured for that group. Notifications received by group members also depend on whether the group has a group mailing list enabled, in this case additional notification settings are available. See *Group mailing list enabled* below for details.

Group mailing list disabled

Group members can be notified when a member of the group starts a review. Group members can also be notified when a change is committed by, or on behalf of, a changelist owner who is also a member of the group. These two notifications can be individually selected as required. See ["Add a group" on page 305](#) for details.

Notifications are sent to the group members individual email addresses.

Group mailing list enabled

Group members can be notified when a member of the group starts a review. Group members can also be notified when a change is committed by, or on behalf of, a changelist owner who is also a member of the group. These two notifications can be individually selected as required.

Additional notifications are available if the group mailing list address is enabled. See ["Add a group" on page 305](#) for details.

Notifications are sent to the group email address.

(5) Disable notifications

By default, notifications for events in a review are sent to all reviewers. Reviewers can disable notifications during a review to avoid further email notifications. Once notifications are disabled for a reviewer, they can be re-enabled when they are specifically [@mentioned](#); reviewers can disable notifications again after they have been re-enabled. See ["Disable notifications" on page 272](#) for details.

(6) Comment author notifications

By default, notifications are not sent to comment authors, but Swarm can be configured to send notifications of comments to comment authors. See ["notify_self" on page 381](#) for details.

(7) Tests have finished

By default, notifications are sent when:

- Automated tests have failed for a review.
- The first time automated tests pass for a review after a test failure for that review.

Log in/Log out

When you are not logged into Swarm, certain features are unavailable to you, such as providing comments to changes or reviews, adding projects, and more.

Log in to Swarm

1. Click the **Log in** link found at the right of the main toolbar.
2. Type in your username and password, appropriate for the Helix Server that Swarm is configured to use.
3. Select the **Remember Me** check box if you prefer to stay logged in between browser restarts.

Note

The Helix Server can enforce maximum login times. You may become logged out even if **Remember Me** is selected. Swarm administrators can change the maximum login time, see "Sessions" on page 420 for details.

4. Click the **Login** button.

Note

If multi-factor authentication is configured for your Helix Server, complete your additional MFA steps to log in to Swarm.

Log out of Swarm

1. Click your userid, found at the right of the main toolbar.
2. Select **Log out** from the drop-down menu.

Note

If multi-factor authentication is configured for your Helix Server, logging out of Swarm will not invalidate your MFA status. If you log back in to Swarm while your MFA status is still valid, you will not be prompted to complete the additional MFA log in steps.

require_login

By default, Swarm requires users to login, which prevents anonymous users from accessing a Helix Server via Swarm. Users who have not logged in see a login page immediately when visiting Swarm:

The steps to log in are identical to using the **Login** dialog.

Swarm administrators can disable `require_login` to allow anonymous users to see commits, reviews, etc.

Note

`service` and `operator` users are not permitted to login.

See [User types](#) in the *Helix Core Server Administrator Guide: Fundamentals* .

Notable minor features

Quick URLs

Many developers like to type the least amount of information to locate the data they're looking for. Swarm tries to assist by handling URLs intelligently. If you visit a URL like:

```
https://myswarm.url/identifier
```

Swarm attempts to locate `identifier` as a [review](#), [changelist](#), [depot path](#), [project](#), [job](#), [user](#), [group](#), depot name, and Git Fusion SHA1 (or fragment). If you visit the URL

https://myswarm.url/123, Swarm redirects to

https://myswarm.url/changes/123, provided that `changelist 123` exists. If you visit the URL **https://myswarm.url/bob**, Swarm tries each of the following URLs and redirects to the first match:

```
https://myswarm.url/changes/bob
```

```
https://myswarm.url/files/bob
```

```
https://myswarm.url/projects/bob
```

```
https://myswarm.url/jobs/bob
```

```
https://myswarm.url/users/bob
```

```
https://myswarm.url/groups/bob
```

If you enter an identifier that does not exist for any type of resource, Swarm displays a **Page Not Found** error.

Note

Changelist identifiers must be numeric, so there could never be a changelist called bob.

Note

Git Fusion SHA1 identifiers (or a fragment of one) work when the SHA1 refers to a single changelist. If the SHA1 refers to more than one changelist, which can occur for Git branches, Swarm reports a 404 error.

@mention

When you write a changelist description, job description, comment, or review, use `@mention` to refer to projects, changelists, jobs, and users. Use `@@mention` to refer to groups. Swarm automatically creates a link for each `@mention` and `@@mention`, so it's easy to navigate to the specified resource. For example, when you include `@job12345` in a comment, Swarm turns that text into a link that, when clicked, displays the Jobs page for `job12345`.

Note

For jobs, the `@` character is optional: Swarm creates job links for any text that looks like a job identifier, such as `job012345`.

Similarly, for changes and reviews, the `@` character is optional: Swarm creates change links for `change 1234`, or review links for `review 2345`.

When you start a code review, including a user `@mention`, or a group `@@mention` in the changelist description automatically makes them reviewers for that code review. During a code review, including a user `@mention` or group `@@mention` in a comment causes the mentioned user or group to receive [notifications](#) of code review events, even if they are not a member of your project or following you or your project.

Additional option for a user @mention:

- `@*mention`: include an asterisk (`*`) before the userid to make the user a required reviewer. See ["Required reviewers" on page 292](#) for details.


Additional options for a group @@mention:

- `@@*mention`: include an asterisk `*` before the groupid to make the group a required reviewer, **All votes required**. See ["Required reviewers" on page 292](#) for details.
- `@@!mention`: include an exclamation mark `!` before the groupid to make the group a required reviewer, **One vote required**. See ["Required reviewers" on page 292](#) for details.

Note

- **Group mailing list enabled:** notifications are sent to the group email address.
- **Group mailing list disabled:** notifications are sent to the group members individual email addresses.

Search

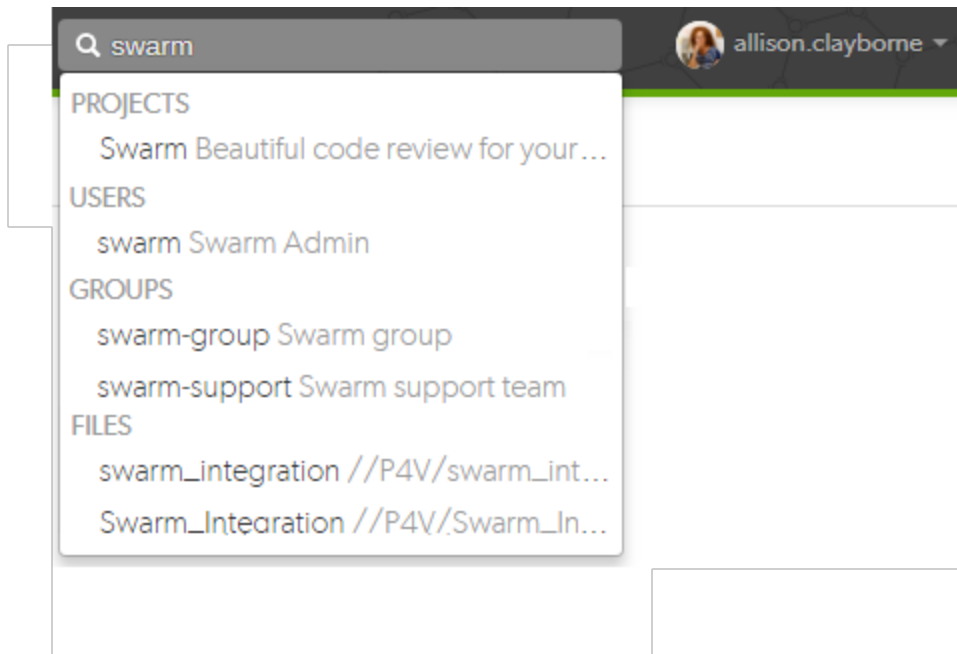

Swarm can search for users, groups, projects, and file paths. Enter keywords or path elements into the search field, which appears at the right of the Swarm toolbar, to display any matching results.

Navigate the results with the ↑ (up arrow) or ↓ (down arrow) keys, and display the details for the result by pressing **Enter**. Or, click a search result with your mouse.

Full-content searching is only available if your Swarm administrator installs the Helix Server Search Tool. See "[Search](#)" on page 418 for details.



Swarm updates the search results as you type. Some results should appear within a second or two. You may have to wait a few seconds for final results to be incorporated into the results list. When Swarm does not yet have any results, it indicates such.

JIRA integration

Swarm ships with a JIRA module that can:

- create links to JIRA when Swarm displays JIRA issue identifiers in changelists, comments, jobs, reviews, etc.

- add links within JIRA back to Swarm, for JIRA issues associated with reviews or committed changes. These links reflect the current status of associated code reviews.

By default, the JIRA module is disabled. To enable JIRA integration, see "[Enabling the JIRA module](#)" on page 355.

Avatars

Each event in an activity stream includes an *avatar*, an image that represents the user responsible for the event. Avatars help to visually tie together various events and personalize the history presented in the stream.

Based on the email address entered in a user's or group's Helix Server account, Swarm attempts to fetch an avatar from [gravatar.com](#). Swarm selects an avatar from its collection of default avatars if an avatar is not returned from [gravatar.com](#).



Hover your mouse over an avatar to display the fullname of the user or group.

Following

Whenever you see a **Follow** button, for example when you are viewing a project page or user profile, clicking the button causes Swarm to send you notifications whenever there is activity generated by the current resource.

This is useful if, in the case of a project, you are not a project member but want to know what's happening in the project. Or, in the case of a user, you want to see what activity that user generates.

To stop receiving notifications, visit the project page or user profile and click the **Unfollow** button.

Time

Swarm typically displays the time of an event, such as when a file was created, as about *X units ago*. Hover your mouse pointer over a time display to see a tooltip displaying the exact date and time of the event.

Tip

Configure Swarm to display the exact time and date of events by setting **Time Display to Timestamp** on your user [Settings tab](#).

Keyboard shortcuts

Swarm provides the following keyboard shortcuts:

- **n** - While viewing "Diffs" on page 190, pressing **n** scrolls to the next difference.
- **p** - While viewing "Diffs" on page 190, pressing **p** scrolls to the previous difference.
- **ESC** - While viewing a dialog, pressing **ESC** closes the dialog.

While entering text into a text area, pressing **ESC** stops text entry.

About Swarm

You can discover the version of Swarm you are using:

1. [Log in](#) to Swarm.
2. Click your `userid`, found at the right of the main toolbar, and select **About Swarm**.

A dialog appears displaying the Swarm version.

Custom error pages

If Swarm encounters an error during processing, such as when a "Quick URLs" on page 240 is used that points to a non-existent resource, Swarm displays a custom error page.

Short links

Swarm provides a *short link* feature that creates shorter URLs than normal to make sharing specific views within Swarm easier. It is also possible to register or configure an alternate, shorter hostname to have even shorter URLs. See "Short links" on page 429 for details.

Conceptually, this is identical to <http://tinyurl.com>, or the Twitter feature <http://t.co>, but is restricted to Swarm URLs on a hostname you control.

Swarm displays a *bookmark* button  when viewing files or folders in the depot.

Click the button to display a popup containing the short link. Press **CTRL+C** (on Windows and Linux), or **Command+C** (on Mac OSX), to copy the short link. You can then paste the short link anywhere you'd like to share the current file or folder view in Swarm.


Mobile browser compatibility

Swarm is intended to be used from any modern desktop browser, mobile browsers are not supported.

Markdown

It is possible to use *Markdown* within Swarm to add text styles to comments and project overview pages. It is not supported in reviews.

Markdown in comments

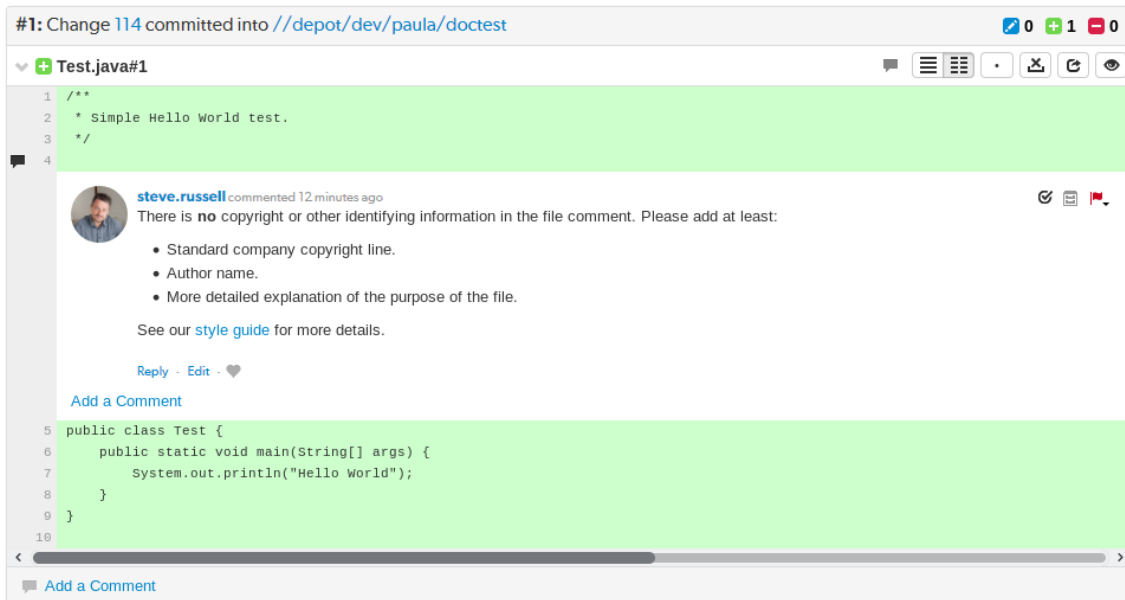

The supported set of Markdown styles in review comments is limited to inline styles, so headers and other structural syntax are ignored.

- **bold** and *italics* can be specified with ****bold**** or **italics**.
- Unordered lists can be specified with asterisk (*) markers. Plus (+) and minus (-) signs also work:

```

* This
* That
* Another

```

- Ordered lists can be specified with numbered markers:

```

1. First
2. Second
3. Third

```

- Hypertext links can be specified with [Link text](http://address/page). If you don't need to add anchor text, then a URL in the text without any markup is linkified.
- You can mark inline text as code using `backticks`.

- You can also mark blocks of code using three backticks on a line, like:

```
```  
var text = "Some code text";
alert(text);
```
```

Markdown is only supported in comments, not in the review description.

The following example shows all of the above syntax in a single example, with both the source and the final result.

```
*Comments* can include Markdown text, which allows basic styles to be  
applied to the text.
```

```
You can have unordered lists, like this:
```

```
* A line  
* Another line  
  * A sub list  
  * Again  
* Back again
```

```
Or ordered lists:
```

```
1. First  
2. Second  
3. Third
```

```
It is possible to mark text as { like: this } or to define a block  
of text as code:
```

```
```  
var i = 1;
var j = 10;
for (i = 1; j != i; i++) {
 print i * j;
}
```
```

```
You can also [create hyper links](http://www.perforce.com) which point to  
other places.
```

Use the backslash character `\` to escape Markdown syntax characters.

You can escape the following characters:

Asterisk `*`

Underscore `_`

Curly braces `\{ \}`

Square brackets `\[\]`

Brackets `\(\)`

Hash `\#`

Plus `\+`

Minus `\-`

Period `\.`

Exclamation point `\!`



claire.brevia commented 6 minutes ago (edited)



Comments can include **Markdown** text, which allows basic styles to be applied to the text.

You can have unordered lists, like this:

- A line
- Another line
 - A sub list
 - Again
- Back again

Or ordered lists:

1. First
2. Second
3. Third

It is possible to mark text as `code { like: this }` or to define a block of text as code:

```
var i = 1;
var j = 10;
for (i = 1; j != i; i++) {
    print i * j;
}
```

You can also [create hyper links](#) which point to other places.

Use the backslash character `\` to escape Markdown syntax characters.

You can escape the following characters:

Asterisk `*`

Underscore `_`

Curly braces `{ }`

Square brackets `[]`

Brackets `()`

Hash `#`

Plus `+`

Minus `-`

Period `.`

Exclamation point `!`

[Reply](#) · [Edit](#) · ❤️

Markdown in projects

Project pages can have a `README.md` file in the root of their `MAIN` branch, which if present will be displayed on the project's overview page.

If you need to change which branch is considered MAIN, and therefore from where the `README.md` is read from, see "Mainline branch identification" on page 392.

Note

By default, Markdown content is displayed but is limited to prevent the execution of raw HTML and JavaScript content. Markdown support can be configured to `disabled` or `unrestricted` mode, see "Project readme" on page 401 for details.

JPlugin Overview Activity Reviews Files Commits Jobs

About

A Java plugin for continuous integration.

Follow

3 MEMBERS 1 FOLLOWER 2 BRANCHES

OWNERS

MODERATORS

MEMBERS

FOLLOWERS

BRANCHES

MAIN

CANDIDATE

P4 Plugin

Jenkins plugin for a Perforce Helix Versioning Engine (P4D).

Contents

- [Release notes](#)
- [Setup guide](#)
- [Notes page](#)
- [Jenkins page](#)

Requirements

- Jenkins 1.642.3 or greater.
- Helix Versioning Engine 2012.1 or greater.
- Minimum Perforce Protection of `open` for the Jenkins user.
- Review Build feature requires Swarm 2014.2 or greater.

Install

1. Open Jenkins in a browser; e.g. http://jenkins_host:8080
2. Browse to 'Manage Jenkins' --> 'Manage Plugins' and Select the 'Available' tab.
3. Find the 'P4 Plugin' or use the Filter if needed
4. Check the box and press the 'Install without restart' button

If you are unable to find the plugin, you may need to refresh the Update site.

1. Select the 'Advanced' tab (under 'Manage Plugins')
2. Press the 'Check now' button at the bottom of the page.
3. When 'Done' go back to the update centre and try again.

As well as the *Markdown* syntax that is supported in comments and described above, the README pages support a more extensive range of syntax, the most notable of which are described below. For a more thorough list of syntax, see the [Markdown cheatsheet](#).

- Headers can be defined using hash (#) marks.

```
# Main heading
## Sub heading
### Lesser heading
```

- Images can be added as well. You can either provide the full URL, or use a relative URL to reference something in Swarm.

```
![alt text](https://p4swarm/view/depot/www/dev/images/jamgraph-jam.gif "Title Text")
```

```
![alt text](/view/depot/www/dev/images/jamgraph-jam.gif "Title Text")
```

- Tables are supported by using pipe (|) separators between columns and colons (:) for justification.

```
| Tables | Look | Like this |
| ----- | ----- | ----- |
| Left | right: | :center: |
```

- It is also possible to blockquote paragraphs using the greater than symbol (>).

```
> Blockquotes can be displayed like this, using the
> the greater than sign at the start of the line.
```

```
Normal text resumes here.
```

6 | Code reviews

A code review is a process in which other developers can see your code and provide feedback that can suggest ways to improve the code's structure, performance, maintainability, and interaction with other code.

Benefits

Some of the benefits of code review are:

- Enforcing coding standards: code reviews can catch code that does not meet your team's coding standards. This improves the readability and consistency of your codebase.
- Knowledge and experience sharing: your team can help you learn to code better. This is particularly useful for developers new to the team.
- Early defect detection: small errors can be caught before they become problems later on.
- Code sharing: code reviews spread knowledge of the current codebase, which helps both with maintaining a mental model of the overall project, as well as defending against developer absences.
- Better personal review: knowing that someone might catch a simple coding error often increases the review developers perform of their own code.

Swarm attempts to provide these benefits without adding onerous overhead for developers.

Facilities

Swarm provides the following code review facilities. In the list, the term *author* refers to the person who creates a change to be reviewed, *reviewer* refers to any authenticated Swarm user performing code review tasks, and *required reviewer* refers to a reviewer whose up-vote is required before a review can be approved.

- Authors can request reviews, and can designate reviewers and required reviewers.
- Reviewers can start a code review on existing changes.
- Reviewers can add themselves to a review to indicate that they are participating in the review and sharing responsibility for the review.
- Reviewers can add comments to a changelist, to a specific file in a changelist, or to a specific line in a file, using [Markdown](#) text.
- Reviewers can vote on a review, to indicate their approval or disapproval.
- Required reviewers can prevent a review from becoming approved until they up-vote the review.
- Project branches with assigned moderators limit review approval to one of the moderators.

- Reviews spanning multiple project branches with assigned moderators, limit review approval to one moderator from any one of the branches by default.

Note

Swarm can be configured to require that one moderator from each branch must approve the review. For more information about moderator behavior, see ["Moderators" on page 291](#).

- Reviewers can mark changes as needing revision, approved, rejected, or to be archived for future consideration.
- Reviewers can commit approved changes if necessary.

Workflow

By default, Swarm's code review workflow is basically advisory in nature with very few restrictions imposed on the code review workflow. However, Swarm does provide a number of mechanisms to structure or restrict code review workflows, such as:

- A required reviewer, which is any user designated by a review author, project member or moderator, or is any authenticated user that joins a review and makes their vote required, can prevent reviews from being approved until they up-vote the review. See ["Required reviewers" on page 292](#) for details.
- Branch moderators, when configured for one or more branches in a project, prevent reviews from being approved (or rejected) without their involvement. For more information about moderators, see ["Moderators" on page 332](#).
- Administrators can optionally configure Swarm to prevent reviews with open tasks being approved or, approved and committed, see ["Prevent Approve for reviews with open tasks" on page 411](#).
- **Workflow Technology preview feature:** off by default:
 - Global workflow rules can be configured to enforce a minimum code review workflow on the entire Helix Core Server. For more information on global workflows, see ["Workflow basics" on page 341](#).
 - Global workflow rules can be configured to enforce a minimum code review workflow on projects, and branches that don't have an associated workflow. For more information on global workflows, see ["Workflow basics" on page 341](#).
 - Individual workflows can be configured by users and can be associated with projects, and branches to enforce that code review workflow on them. For more information on workflow, see ["Workflow basics" on page 341](#).

Agile development teams should find sufficient capability within Swarm to make code reviews a regular part of their workflow. Swarm's development team has been using it regularly during development of Swarm. If you have ideas and suggestions for improvement, please [contact us](#).

Models

There are three code review models: pre-commit, post-commit, and the Git Fusion model. Which model you use for code reviews with Swarm is up to you.

Pre-commit model

The pre-commit model is possible due to Helix Server's *shelving* feature. Shelving enables you to temporarily make copies of your files available to other users without committing the changes into the depot. Shelving can be a very handy way for developers to create a backup, or to handle local workspace changes that might otherwise lose work in progress, without having to commit code that might destabilize a codebase.

Swarm uses the shelving feature in Helix Server to manage code reviews. Shelving allows reviewers to easily acquire a copy of the code to be reviewed, and allows updates to the reviewed code prior to submission.

For more information on shelving, see [Shelve Changelists](#) in *Helix Core Server User Guide*.

Post-commit model

The post-commit model can be used if your team's development processes preclude the use of shelving. Code must be committed to the Helix Server before code review can begin, which reduces the opportunity to fix problems before, for example, a continuous integration system notices problems. However, code reviews can be started for any existing code regardless of how long it has been committed.

Git Fusion model

Perforce Git Fusion provides repo management for Git repositories, and provides workflows that enable Git and Helix Server users to collaborate on the same projects using their preferred tools.

The Git Fusion model is similar to the pre-commit model; changes in your local repo can be pushed for review to a named Helix Server branch in the Git fusion repo configuration, making your proposed changes available so that others can review and comment on them prior to committing them to the target branch. Git Fusion and Swarm work together to create a review branch and container for the pre-commit collaboration.

The Git Fusion model has several limitations that you should be aware of:

- The target branch for Git Fusion-created reviews must be a fully populated branch, and must be listed in the repo-specific Git Fusion configuration.
See [Setting up Repos](#) in the *Git Fusion Guide* for details on converting a lightweight branch into a fully populated Helix Server branch.
- Reviews created with Git Fusion can only be updated from Git Fusion.

- You cannot clean up history and then push your changes to the same review. If you perform a Git rebase, you should push your changes as a new review.
- A Git Fusion review does not currently display the individual task branch commits that make up the review. Only the merged commit diffs are shown.

For more information on Git Fusion, see the [Git Fusion Guide](#).

Internal representation

Swarm-managed changelists

A code review consists of one or more shelved changelists that Swarm manages. A shelved changelist is a pending changelist that has a snapshot of its files on a shelf associated with the changelist.

When a review is started, Swarm creates a new changelist that becomes the review changelist. What happens afterwards varies:

- If the review contains uncommitted work (the pre-commit model), Swarm copies the shelved files from the user's changelist that initiated the review into the review's changelist.
- Any time that a user's changelist associated with the review has its shelved files updated, Swarm copies the shelved files into its review changelist and creates an archive changelist. An archive changelist is no different from any other pending changelist with shelved files, but it allows Swarm to provide versioning and diffs within a review.
- If the head version of a review is committed (the post-commit model), the review's changelist is emptied of files.

The review's changelist is never actually committed; this allows the review to be opened later with additional shelved changes.

Important

Swarm's managed review changelists should only be deleted if you are uninstalling Swarm.

Swarm's review changelists maintain the history of a review and all of its feedback. The deletion of a Swarm shelved changelist causes instability and potentially data loss, and represents a scenario that can be very challenging to recover from, even with the engagement of Perforce consultants.

You can display a list of all of the Swarm-managed changelists using the `p4 changelists` command:

```
$ p4 changelists -u swarm
Change 1212285 on 2015/07/31 by swarm@swarm-96017af4-5615-9819-7af1-
6fc1fa537214 *pending* 'Add requirements and instructions'
Change 1212284 on 2015/07/31 by swarm@swarm-96017af4-5615-9819-7af1-
```

```
6fc1fa537214 *pending* 'Add requirements and instructions'
...
```

swarm is the userid with *admin*-level privileges within the Helix Server that Swarm is [configured to use](#). Use the appropriate userid when you run the `p4 changelists` command.

Swarm-managed workspaces

Whenever Swarm creates a changelist for a review, it uses a client workspace (or just workspace) associated with the configured Helix Server userid that has *admin* privileges. Whenever a user commits a change via Swarm's user interface, Swarm uses a workspace associated with that user.

To learn more about workspaces, see [Helix Server as a version control implementation](#) in the *Solutions Overview: Helix Version Control System* Guide.

The workspaces that Swarm creates and uses live in the `SWARM_ROOT/data/clients` folder.

Inside the clients folder, Swarm maintains a user-specific folder that contains any workspace folders that may be required. Each user-specific folder is named by converting their Helix Server userid into hexadecimal to avoid any characters that would be problematic in the filesystem, such as slashes, accents, UTF-8 characters, etc. For example, the folder for the user `steve.russell` would be named `73746576652e72757373656c6c`.

Within the user-specific folder are the folders that become the root of each workspace. Each of these folders is named with a globally-unique identifier (GUID) prefixed with `swarm-`, for example `swarm-438d482b-f107-9a35-c06c-86ac68136b00`. Accompanying each folder is a lock file with the same name plus the `.lock` extension. Finally, the user-specific clients folder contains a management lock file called `manage.lock`.

Here is an example of the folder structure:

```
SWARM_ROOT/
  data/
    clients/
      73746576652e72757373656c6c/
        manage.lock
        swarm-438d482b-f107-9a35-c06c-86ac68136b00/
        swarm-438d482b-f107-9a35-c06c-86ac68136b00.lock
        swarm-8388362a-233d-0cb9-3e90-895eaaa99f6c/
        swarm-8388362a-233d-0cb9-3e90-895eaaa99f6c.lock
      7061756c612e626f796c65/
        manage.lock
        swarm-da7de4b4-0ecb-12c8-1b35-f3e32bb18033/
        swarm-da7de4b4-0ecb-12c8-1b35-f3e32bb18033.lock
```

Here are the steps Swarm takes when it needs to use a client:

1. Convert the current connection's userid to hexadecimal.
2. Check to see whether a user-specific folder exists within `SWARM_ROOT/data/clients`; if not, create the folder.
3. Within the user-specific folder, loop over any existing workspace folders and attempt to lock each in turn:

If a lock is acquired skip to the next step. Otherwise, perform the following procedure.

Create workspace procedure:

- a. Check if the max number of clients for the current user has been reached:
 - If so, wait a short amount of time (50 milliseconds), and start [step 3](#) again.
 - If not, proceed to the next step.
 - b. Take a lock on `manage.lock`.
 - c. Check if the max number of clients for the current user has been reached:
 - If so, release the `manage.lock`, wait a short amount of time (50 milliseconds), and start [step 3](#) again.
 - If not, proceed to the next step.
 - d. Create a new workspace folder using a GUID-based filename, and take a lock on the folder.
 - e. Release the `manage.lock` lock.
4. Perform the necessary file operations using the locked workspace folder.
 5. Revert the file content within the workspace folder to avoid having constantly growing disk space use.

Note

There may occasionally be stray files left; Swarm is not aggressive about cleaning up.

6. Swarm releases the lock on the workspace folder.

Most users should only require 1-2 workspaces, and those are only required if they commit from Swarm. The *admin* user that Swarm is configured to use should only use one workspace per configured worker.

By default, the number of workspaces that could be active at any given instant is two times the number of configured workers. Since the default worker count is three, Swarm would use at most six workspaces simultaneously.

If the workspace limit is reached, further file processing is blocked until a workspace becomes available. Potentially, this means that users could encounter timeouts. Configuring Swarm to use more workers could solve that issue.

Removal considerations

Administrators might wish to remove Swarm-managed workspaces. There are a few considerations that should be assessed prior to removal:

- Ideally, you should stop the web server (taking Swarm out of service) before removing a Swarm-managed workspace from the Swarm server; this eliminates the risk of removing a workspace that is in use.

If you do not stop the web server first, Swarm may encounter an error during a submit.

- Removal of a Swarm-managed workspace folder does not remove the client spec from the Helix Server. Unless the client spec is removed, that workspace effectively becomes orphaned. Orphaned clients are, of themselves, not a big concern as the storage and performance impact is negligible.
- Removal of a Swarm-managed workspace's corresponding client spec in the Helix Server can be done. However, **you should never remove a client spec that has associated shelved files.**

Usually, the only client specs that should have associated shelved files belong to the *admin* account that Swarm is configured to use. All other workspaces that may exist for other users are primarily used for submitting changes, and so should not have shelved files associated.

Reviews list

The code review list helps you keep track of code reviews that:

- Have been requested and are awaiting review
- Are underway
- Have been accepted, rejected, or archived

To see all available reviews, click the **Reviews** link in the main toolbar.

The **Reviews** page lists open and closed reviews for all projects in the Helix Core Server.

The screenshot shows the Helix Core Server interface. At the top, there's a navigation bar with 'REVIEWS' highlighted. Below it, the 'Reviews' section has two tabs: 'Opened' (31) and 'Closed' (77). A toolbar contains various icons for filtering and actions. The main content area displays a table of reviews:

ID	Description	Project	Created	Actions
234	Updating tests for test-19.txt,	test-data:data	26 days ago	View, Comment, Edit, 0, 0/0
232	Updating tests for test-18.txt,	test-data:data	26 days ago	View, Comment, Edit, 0, 0/0
230	Updating tests for test-17.txt,	test-data:data	26 days ago	View, Comment, Edit, 0, 0/0

The **Opened** and **Closed** tabs display:

- **Opened** tab: displays a list of all code reviews that have started, are being reviewed, are awaiting revisions, or need to be committed.


- **Closed** tab: displays a list of all code reviews that have been approved and committed, rejected, or archived.

Each review displays the following information:



- The review id
- The avatar of the review's author
- The review's description
- The associated project's name and branch
- When the review was created or when the review was last updated depending on the **Result order** button setting.

When review results are older than 24 hours they are displayed in numerical order within each day.



To change the sort order, click the **Result order** button and select **Created** or **Last activity** from the dropdown menu:

- **Created**: Reviews sorted by when they were created
- **Last activity**: Reviews sorted by when they were last updated

Note

- If the **Result order** button is not displayed reviews are sorted by when they were created.
- **Result order** button display is a global setting controlled by the Swarm administrator. See "[Reviews filter](#)" on page 409 for details.

- An icon indicating the current review state
- An icon indicating the review type. This can be Pre-commit or Post-commit.
- An icon indicating the test suite state
- A counter for the number of open (non-archived) comments that are associated with the review. Hover your mouse over the comment count to display a tooltip showing the number of archived comments associated with the review.
- An indicator showing the number of up votes and down votes

Note

Hover your mouse over any of the icons to see tooltips.

"Projects" on page 223 and "Groups" on page 220 have their own review lists that display reviews created by their members.

Filtering reviews


The following filtering options are available for code reviews:

- **Branches** (only available on the project "Reviews tab" on page 226): a dropdown menu that lets you filter which reviews to display based on the current project branches:




- **All:** all reviews are displayed for all branches within the current project.
- **Branch Search:** An auto-complete search field that allows you to choose one of the branches within the current project. Once specified, only reviews for the selected project branch are displayed.
- **Select Branch:** selecting a branch name displays only reviews for that project branch.

- **Project:** a dropdown menu that lets you filter which reviews to display based on project:

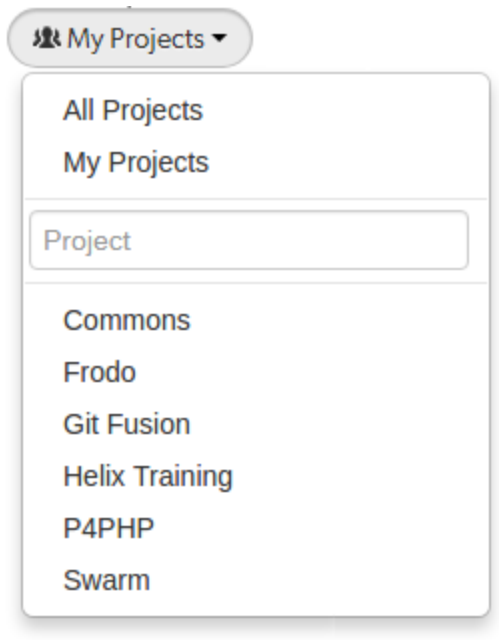

- **All Projects:** all reviews are displayed for all projects.
- **My Projects:** all reviews for all of the projects you are participating in, as a member, owner, moderator, or follower.
- **Project Search:** An auto-complete search field that allows you to choose one of the projects defined in Helix Server. Once specified, only reviews for the selected project are displayed. Click the **X** button to remove a *projectid* after it has been specified.
- **Select Project:** selecting a project name displays only reviews for that project.

- **Users:** a dropdown menu that lets you filter which reviews to display based on user involvement:

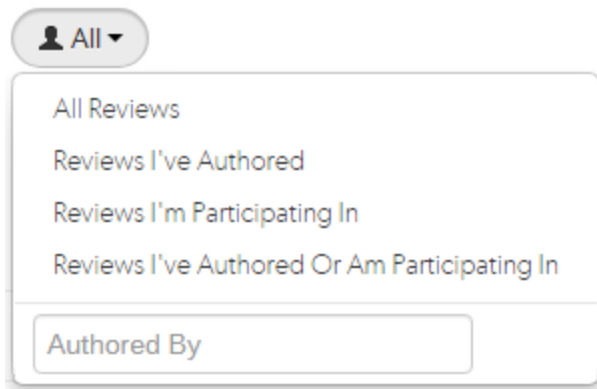

- **All Reviews:** displays all reviews.
- **Reviews I've Authored:** displays reviews that you have authored.
- **Reviews I'm Participating In:** displays reviews that you are a reviewer of, but not an author of.
- **Review I've Authored Or Am Participating In:** displays reviews that you have authored, or are a reviewer of.
- **Specific User:** An auto-complete search field that allows you to choose one of the user accounts defined in the Helix Server. Once specified, only reviews authored by the user are displayed. Click the **X** button to remove a userid after it has been specified.

When you select one of the available options, the list of options updates to match the currently selected filter, and the **Users** dropdown indicates the current filter: **All**, **Author**, **Participant**, or **userid**.

- **Reviewer presence, (Opened tab only):**



- **Has Reviewers:** displays reviews that have one or more reviewers.
- **No Reviewers:** displays reviews that have no reviewers.

- **Review state, (Opened tab only):**



- **Needs review:** the review's changes need to be reviewed.
- **Needs revision:** the review's changes have been reviewed, but further revisions are required before the review can be accepted.
- **Approved:** the review's changes have been approved, and should be committed.

■ **Review state, (Closed tab only):**



- **Approved:** the review's changes have been approved and committed.
- **Rejected:** the review's changes have been rejected.
- **Archived:** the review's changes have been put aside.

■ **Test status:**



- **Tests pass:** when automated tests are enabled for the associated project, and the test suite execution succeeds, Swarm updates the review accordingly.
- **Tests fail:** similar to the Tests pass state, except that the test suite execution has failed. Check with your test suite to determine why the tests failed.

■ **Vote status:**



- **Voted up:** I have voted the review up.
- **Voted down:** I have voted the review down.
- **Not voted:** I am a participant but have not voted on the review.

Filters for voting only apply to reviews which you are a participant of. Commenting on or voting on a review will automatically add you as a participant. If you leave the review after commenting on it, then this review will not be included in the list.

■ **Comment status:**



- **Has comments:** I have commented on the review.
- **Does not have comments:** I have not commented on the review.

Filters for commenting only apply to reviews which you are a participant of. Commenting on or voting on a review will automatically add you as a participant. If you leave the review after commenting on it, then this review will not be included in the list.

■ **Bookmark:** review filters can be remembered by bookmarking the page, and this icon acts as a reminder of that.



■ **Search term:** where review descriptions match your search string.

Swarm updates the URL in your browser to reflect filtering options. This makes it easy to bookmark or share review list URLs. Swarm maintains the current filtering if you click on a review link and then use your browser's back button to return to the review list.

Review display

During a code review, reviewers spend most of their time using the review interface:

The screenshot displays the Swarm code review interface. At the top, there is a navigation bar with tabs for REVIEWS, PROJECTS, FILES, COMMITS, JOBS, GROUPS, and WORKFLOWS. Below this is a sub-navigation bar with links for JPlugin, Activity, Reviews (selected), Files, Commits, and Settings. The main content area shows a review titled "Review 135" by a user with a profile picture. The review text reads: "Tidying up some of the code to fix some of the edge conditions. Also putting some support for future features in place. #review @triage". Below the text are buttons for "Add a Comment" and "Add Job". To the right of the review text are several utility buttons: "Mark all comments read", "Mark all comments unread", "Add Change", "Download .zip", and "Needs Review". Below the review text, there are sections for "Tasks", "Reviewers", "Groups", and "Individuals". At the bottom, there is a "Files" section with a "Comments" tab selected, showing a list of changes committed into a specific branch. The changes listed are: "FishEyeBrowser.java#2", "OpenGrokBrowser.java#2", "P4Browser.java#2", "P4WebBrowser.java#2", and "SwarmBrowser.java#2". A tip at the bottom of the screenshot reads: "Tip: Use [n] and [p] to cycle through the changes."

The review interface is very similar to the [changelist interface](#); and provides largely the same functionality, but has several notable differences that are described in the following sections.

Add Change button

Once a review has been started you can add a changelist to the review. It can be useful to add changelists to an existing review. For example, if follow up changes are made to files in a review or if you need to group a number of changelists under a single review.

The **Add Change** button in the review heading is used to add a changelist to an existing review. The button is not visible if the review is in a state that is protected from change by the review workflow rules. For details of the **On update of a review in an end state** rule, see "[Workflow rules](#)" on page 339.



The options available in the **Add Change** dropdown menu depend on whether the review is pre-commit or post-commit:

■ Pre-commit reviews:

- **Append Pending Changelist:** when you add a pending changelist to a review, the files in the changelist are appended to the existing files in the review, see ["Append a pending changelist to a review" on page 285](#).
- **Replace with Pending Changelist:** when you add a pending changelist to a review, all of the files in the review are replaced with the files in the changelist you are adding to the review, see ["Replace review with a pending changelist" on page 287](#).
- **Replace with Committed Changelist:** when you add a committed changelist to a review, all of the files in the review are replaced with the files in the changelist you are adding to the review, see ["Replace review with a committed changelist" on page 289](#).

Note

If you replace a pre-commit review with a committed changelist, the new version of the review will be a post-commit review.

■ Post-commit reviews:

- **Replace with Pending Changelist:** when you add a pending changelist to a review, all of the files in the review are replaced with the files in the changelist you are adding to the review, see ["Replace review with a pending changelist" on page 287](#).

Note

If you replace a post-commit review with a pending changelist, the new version of the review will be a pre-commit review.

- **Replace with Committed Changelist:** when you add a committed changelist to a review, all of the files in the review are replaced with the files in the changelist you are adding to the review, see ["Replace review with a committed changelist" on page 289](#).

Tip

When the content of a review is changed, Swarm checks to see which branches are in the new revision of the review:

- **If a new branch was added to the review:**
 - Default reviewers on the new branch are added to the review.
 - Moderators from the added branch become moderators for the review alongside the existing moderators.
 - **Only if workflow is enabled:** if the new branch is associated with a workflow, the [workflow is merged](#) with the existing workflow. The most restrictive workflow is used for the review.
- **If a branch is no longer part of the review:**
 - Reviewers for the review are not changed.
 - Moderators from the removed branch no longer moderate the review.
 - **Only if workflow is enabled:** if the branch was associated with a workflow, the branch workflow is removed from the review.

Download .zip button

The **Download .zip** button is used to download a ZIP archive containing all of the files in the review. The version of the files downloaded is the most recent review revision selected in the review revision selector, see ["Select review revisions to view"](#) on page 273.

Important

Files **Marked for Add** in pre-commit reviews and shelved changelists are not included in the zip file.

Note

The **Download .zip** button is not displayed if the zip command-line tool is not installed on the Swarm server. For information about installing, and configuring the zip command-line tool, see ["Zip archive"](#) on page 359.



When you click the **Download .zip** button, Swarm performs the following steps:

1. Scans the files/folders:
 - Checks that you have permission to access their contents, according to the Helix Core Server protections.
 - Checks that the total file size is small enough to be processed by Swarm.
2. Syncs the file contents to the Swarm server from the Helix Core Server.
3. Creates the ZIP archive by compressing the file content.
4. Starts a download of the generated ZIP archive.



Note

- You might not see all of the above steps; Swarm caches the resulting ZIP archives so that repeated requests to the same files/folders can skip the sync and compress steps whenever possible.
- If an error occurs while scanning, syncing, or compressing, Swarm indicates the error.

Deployment status

When [automated deployment](#) has been configured for a project, the deployment success  or failure  is indicated in the review's heading. If your deployment program can provide a URL that provides details of the deployment, the indicator becomes linked; click the indicator to see the deployment results.

Test status

When [continuous integration](#) has been configured for a project, test success  or failure  is indicated in the review's heading. If your continuous integration tests can provide a URL that provides details of a test run, the indicator becomes linked; click the indicator to see the test details.


When you hover your mouse over the test status indicator, Swarm indicates the test status and how long ago that status was achieved.

Review state button

The **Review state** button displays the current state of the review, and is also used to change the state of the review.

For information on the review states and changing the review state, see ["States" on page 299](#) and ["Change review state" on page 302](#).

Edit description

An **Edit Description** icon  appears in the review's description, which allows you to update the description to reflect any updates have been made during the review.

Tasks

Comments can be flagged as tasks, for more details on working with tasks see [Tasks](#).

Note

If Swarm is configured to prevent approval of reviews with open tasks and a review has open tasks, the **Approve**, and **Approve and Commit** options will not be available for the review. This option is configured by an administrator, see ["Prevent Approve for reviews with open tasks"](#) on page 411.

To approve, or approve and commit a review with open tasks, you must address the tasks first and then set them to **Task Addressed**, or **Not a Task**, see ["Set a task to Task Addressed or Not a Task"](#) on page 199 for details.


A summary of the number and status of comments flagged as tasks is displayed below the code review description. Archived comments that are flagged as tasks are not included in the summary.


Tasks 


 11  0  0


Click the **Task list** button  to display a dialog listing all tasks associated with the review:

Tasks
✕

 Reporter Name







Status	Reporter	Description
Open	steve.russell	Not very descriptive.
Open	alex.randolph	I agree, can you add more detail please.
Addressed	alex.randolph	Spotted a spelling mistake, the first word in the introductory paragra...

View

Cancel

Within the **Tasks** dialog, you can filter the tasks by the reporter (the userid of the user who created the task), and/or by task state:

- Click the **Red Flag** button to display only open tasks (comments that need to be addressed).
- Click the **Green Check Mark** button to display only addressed tasks (comments that have been addressed).
- Click the **Blue Double-check Mark** button to display only verified tasks (comments that have been addressed and verified).


Note

Archived tasks do not appear in the Tasks dialog.

To view a particular task, select the task in the **Tasks** dialog, and click the **View** button. Alternately you can double-click on the task in the **Tasks** dialog. The **Tasks** dialog closes and Swarm adjusts the review display so that the chosen task is in view.

Reviewers

A *Reviewers* area appears below the review's description whenever a review has one or more reviewers, or you are logged in.



This area includes, from left to right, the [edit reviewers button](#) , the current up and down vote counts, the avatars of current reviewer groups, and the avatars of the current reviewers.

Note


By default, reviewer group members are not displayed in the *Individuals* area of the reviews page when they interact with a review (vote, comment, update, commit, archive, etc.). This avoids overloading the *Individuals* area with individual avatars if you have large reviewer groups.

An exception to this behavior is when a member of a reviewer group is also an individual [required reviewer](#), in this case their avatar will be displayed in the *Individuals* area.

See "[Expand group reviewers](#)" on [page 415](#) for details on displaying reviewer group members when they interact with a review.

Group reviewer

If you are a member of a group that is a reviewer on the review, click your individual avatar to vote on the review. See the "[Individual reviewer](#)" on [page 269](#) table for details. Your vote is registered for the group, and is also displayed on your individual avatar. Click on the group avatar to see how individual members have voted on the review:

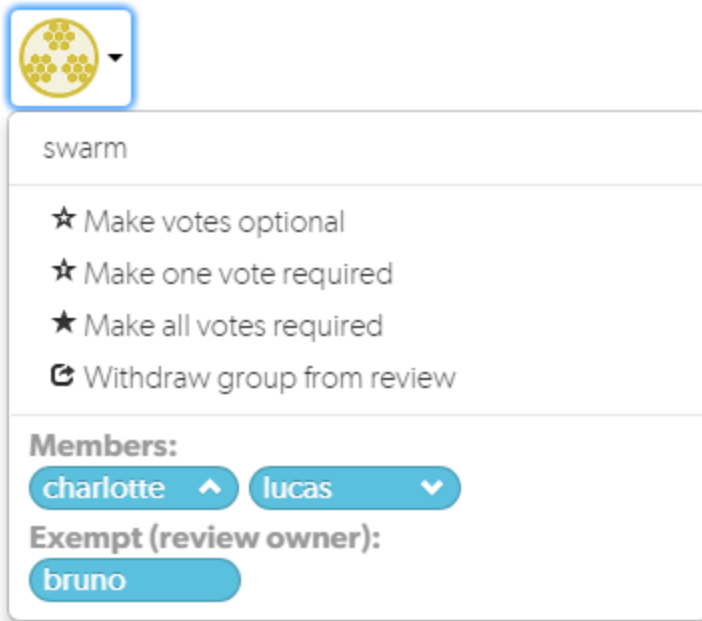

You must be the review author, a project member, a project moderator, or a user with super privileges to change the group settings:

Note

If the review includes content that is part of a project or branch with [Retain default reviewers](#) enabled, the following restrictions apply to the review:

- The voting option for a retained default reviewer can only be changed to a stricter level, you cannot reduce the voting level.
- Retained default reviewers cannot be removed from the review.

■ Make votes optional:

- If any group member votes down the review, the group avatar displays a badge indicating that the group has voted down the review.
- If at least one group member votes up the review and **no** members of the group vote down the review, the group avatar displays a badge indicating that the group has voted up the review.

■ Make one vote required: Indicated by a star badge with a 1 over the group avatar.

- If any group member votes down the review, the group avatar displays a badge indicating that the group has voted down the review.
- If at least one group member votes up the review and **no** members of the group vote down the review, the group avatar displays a badge indicating that the group has voted up the review. See [Required reviewers](#) for details.

- **Make all votes required:** Indicated by a star badge over the group avatar.
 - If any group member votes down the review, the group avatar displays a badge indicating that the group has voted down the review.
 - If all the group members vote up the review and **no** members of the group vote down the review, the group avatar displays a badge indicating that the group has voted up the review. See [Required reviewers](#) for details.
- **Withdraw group from review:** Removes the group from the review.

Individual reviewer

When an individual reviewer has voted on a review, their avatar displays a badge indicating whether they voted up or down. [Required reviewers](#) have a star badge over their avatar.

If you are logged in and viewing a review you did not author, your avatar appears to the right of any other reviewers and its appearance varies according to the following conditions:


Note

If the review includes content that is part of a project or branch with [Retain default reviewers](#) enabled, the following restrictions apply to the review:

- The voting option for a retained default reviewer can only be changed to a stricter level, you cannot reduce the voting level.
- Retained default reviewers cannot be removed from the review.


When you are not yet a reviewer, or you are a member of a reviewer group who has not yet voted: Clicking your avatar presents a menu allowing you to vote up or down and thereby become an individual reviewer, or simply join the review as an individual reviewer without voting.

When a member of a reviewer group votes they automatically become an individual reviewer as well.




When you are an individual reviewer who has not yet voted: No badge appears on your avatar and clicking your avatar presents a menu allowing you to vote up or down, change whether your individual vote is required or not, or leave the review.

If you are also a member of a reviewer group and you click **Leave Review**, you will remain a member of the reviewer group.

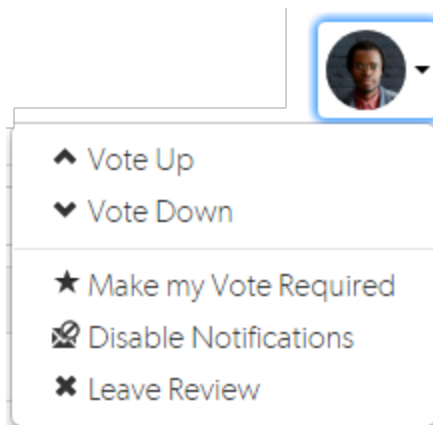


When you are an individual reviewer who has voted, or a member of a reviewer group who has voted: Your avatar displays a badge indicating your vote. Clicking your avatar presents a menu allowing you to clear or change your vote, change whether your individual vote is required or not, or leave the review.

If you are also a member of a reviewer group and you click **Leave Review**, your vote is cleared but you will remain a member of the reviewer group.

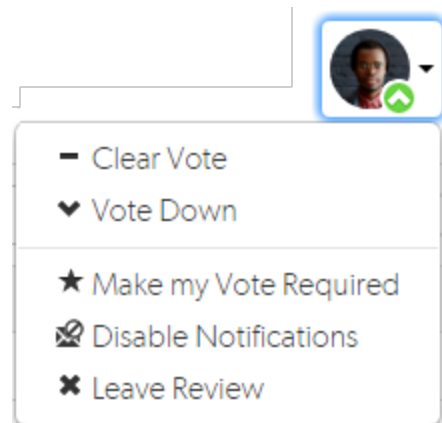

When you are a required reviewer, or a member of reviewer group that requires all votes: Your avatar displays a star badge indicating that the review cannot be approved until you vote up. Clicking your avatar presents a menu allowing you to change your vote, make your vote optional, or leave the review.

If you are also a member of a reviewer group and you click **Leave Review**, you will remain a member of the reviewer group. **Make my Vote Optional** is not available for members of "all votes required" reviewer groups.

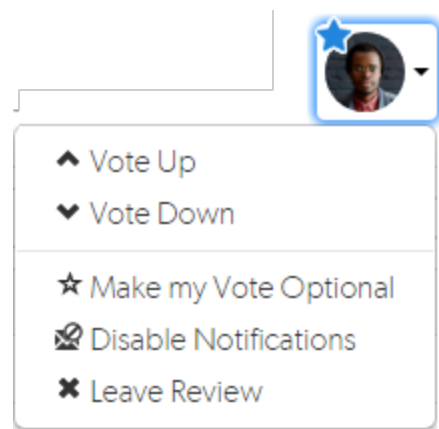

Review approval

A review can be approved when the following requirements are met:

- There are no down votes on the review.
- All of the [Required reviewers](#) on the review have voted up.
- The **Minimum up votes** on the review has been satisfied for **each** of the [projects](#) and [branches](#) the review spans.

Use the [Review state button](#) to approve the review.

Tip

- If the review is moderated, only the moderator can approve the review. For more information about review moderation, see "[Moderators](#)" on page 291.

■ Automatic approval of reviews:

- If the **Automatically approve reviews** workflow rule is enabled for the review's project/branch, the review is automatically approved as soon as the review requirements are satisfied.
- If the review has a moderator, the review will not be automatically approved. The moderator must approve the review manually.

For more information about the **Automatically approve reviews** rule, see "[Workflow rules](#)" on [page 339](#).

Stale votes

When a review is updated, if the review's list of files, file content, or file-types changes, any votes cast on the review become *stale*. The vote counts are reset, and the vote indicators become muted.

If you hover your mouse over a reviewer with a stale vote, a tooltip appears displaying the *userid*, how they voted, and on which version of the review; each version is represented as a point on the "[Select review revisions to view](#)" on the next page.

Note

Stale vote handling is not supported for Git-created reviews.

Disable notifications


When you become a review participant, by joining the review or being [@mentioned](#) in a comment or in the review's description, you receive notifications for any events associated with the review. If you find that the notifications become more of a burden than benefit and you wish to continue being a review participant, you can disable notifications:


1. Click your avatar in the reviewers area to display your reviewer options.
2. Click **Disable Notifications**.

Once notifications are disabled, you no longer receive notifications. However, if you are [@mentioned](#) in a subsequent review comment, you do receive a notification for that comment; regular notifications remain disabled. This approach ensures that you don't miss anything that other reviewers or the review author deems important.


Changing the review author

If the [configuration option](#) to allow users to change the author of a review is enabled, then an extra icon is displayed to the left of the Tasks and Reviewers icons. By default this option is disabled, talk to your Swarm Administrator if you require this feature.

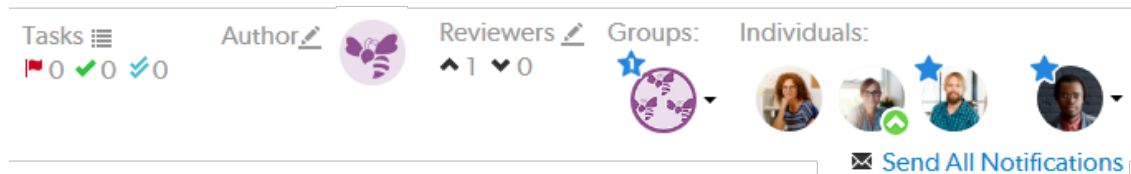

If the edit author button  is displayed, clicking the edit button will open a dialog that allows the author of this review to be changed. This is useful if the original author is no longer available, or ownership has passed to a different developer.

Select review revisions to view



The review revision selectors are used to specify which revisions of a review you want to *diff*, they are located in the **Files** tab above the list of files.

- **Left dropdown selector:** the base version for the review is selected by default, base is the version of the file that was checked out of the depot before it was changed for this review. The current version in the depot, sometimes called Head can be selected, if there are multiple revisions of the review a specific revision can be selected.
- **Right dropdown selector:** the latest revision of the review is selected by default. If there are multiple revisions of the review, a specific revisions of the review can be selected.

Tip

If a review consists of one or more Swarm-managed changelists. When comparing versions of a review, Swarm is showing any differences between the selected versions, not the review author's personal changelist. See "[Internal representation](#)" on page 253 for details.

For information on viewing *diffs*, see "[Diffs](#)" on page 190.

Filter comments button

For involved reviews that have many revisions and many comments, it can sometimes be difficult to determine whether the points expressed in comments have been addressed. To help with such

situations, click the **Filter comments** button  to limit the displayed comments to the current review version.

File listing

The file listing header displays:

#3: Change 753398 shelved into `//depot/main/swarm/collateral/sphinx/administration`

- The current version of the files in the review.
- Which changelist contains a shelved copy of the review's files.
- The common path for all of the files in the review.




In diff mode, the file listing header displays:


#2-3: Changes between shelf 753759 and shelf 753398 into `//depot/main/swarm/collateral/sphinx/administration`

- Which two versions of the review's files are being compared.
- Which changelists contain the files being compared.
- The common path for all of the files in both versions of the review.

History tab


The **History** tab presents a list of the events that affect this review.

 Files 5
 Comments 0
 History




paula.boyle updated description of [review 135 \(revision 2\)](#) for `jplugin:main`

42 minutes ago




alex.randolph cleared their vote on [review 135 \(revision 2\)](#) for `jplugin:main`

about an hour ago



alex.randolph updated description of [review 135](#) for `jplugin:main`

13 days ago




alex.randolph updated description of [review 135](#) for `jplugin:main`

13 days ago


Events include:

- When the review was started
- When a new reviewer joins the review
- When the review's state changes
- When the review's files are updated
- When a reviewer votes on the review
- When someone comments on the review, or one of its files
- When tests pass or fail, provided continuous integration is configured

Mark file as read

Beside each file in a review is a **Mark file as read** button , which help you keep track of which files you have reviewed. The read flag is remembered independently for each user. If the content of a file is changed in an update to the review, the read flag automatically clears. This is particularly useful when a code review consists of many files.

When clicked, the button color inverts and the associated file is visually muted, to make it easy to distinguish read files from unread files:



If a file has been marked as read, click the button a second time to reset the status to unread.

Identifying reviews created with Git Fusion

Git Fusion-initiated reviews include the Git logo beside the main review identifier. This indicator is important because Helix Server users cannot update Git Fusion-initiated reviews.

Review 773273 

Activities

This section describes the major activities that affect code reviews, including starting a review, updating a review, and fetching a review's files.

Start a review

To start a code review, choose one of the following approaches:

Important

If your Helix Server is configured as a commit-edge deployment, and your normal connection is to an edge server, Swarm refuses to start reviews for shelved changes that have not been promoted to the commit server.

Within Swarm, this means that the **Request Review** button does not appear for unpromoted shelved changes. Outside of Swarm, attempts to start reviews for unpromoted shelved changelists appear to do nothing. Ask your Helix Server administrator for assistance if you cannot start a review.

An administrator of the Helix Server can automatically promote shelved changes to the commit server by setting the configurable `dm.shelve.promote` to `1`.

- When you use Swarm to view a shelved or submitted changelist, click the **Request Review** button to request a review of that changelist.

Requesting a review on a shelved changelist uses the [pre-commit](#) model and requesting a review on a submitted changelist uses the [post-commit](#) model.

Note

To view a shelved or submitted changelist, use a [Quick URL](#). For example, if your change is **54321**, visit the URL: `https://myswarm.url/54321`

- When you are about to shelve or submit files:
 1. Include `#review` within your changelist (separated from other text with whitespace, or on a separate line).

Once the review begins, Swarm replaces `#review` with `#review-12345`, where **12345** is the review's identifier.

Note

The `#review` keyword is customizable. For details, see ["Review keyword" on page 404](#).

2. At this time, you can add reviewers to the code review by using `@mention` for users, and `@@mention` for groups in the changelist description for each desired reviewer.

If your `@mention` or `@@mention` includes an asterisk (*) before the *userid* or *groupid*, for example `@*userid`, that user or all of the group members become required reviewers. If your `@@mention` includes an exclamation mark (!) before the *groupid*, for example `@@!groupid`, the members of that group become required reviewers but only one member of the group is required to vote. See ["Required reviewers" on page 292](#) for details.
3. Complete your shelve or submit operation.

Warning

If you shelve a changelist and subsequently edit the description to include `#review`, a review is **not started**. You must re-shelve the files after adding `#review`.

Tip

You can also start a Swarm review with P4V, P4VS, and P4Eclipse. See below for details:

- **P4V**: see the [Swarm integration features](#) section of the *P4V User Guide*.
- **P4VS**: see the [Managing files](#) chapter of the *P4VS User Guide*.
- **P4Eclipse**: see the [Reviewing changes](#) chapter of the *P4Eclipse User Guide*.

- When you are using Git Fusion, you can start a review by pushing your changes to a target branch using the following command:

```
$ git push origin task1:review/master/new
```

task1 is the name of the current Git task branch, and **master** is the target branch that the proposed changes are intended for.

Important

The target branch must be mapped to a named Helix Server branch in the Git Fusion repo configuration.

See the [Converting a lightweight branch into a fully-populated branch](#) section of the *Git Fusion Guide* for details.

When the command completes, the output indicates the **review id** that has been created:

```
remote: Perforce: Swarm review assigned: review/master/1234
```

where **1234** is the review id that was just created.

For more information on Git Fusion, see the *Git Fusion Guide*.

Note

If you are using P4V and its Swarm integration, and you encounter the error **Host requires authentication**, ask your Helix Core Server administrator for assistance. See "P4V Authentication" on page 371 for details.

Update a review

To update a code review, use one of the following approaches:

- For a **pre-commit** review that you authored:
 1. Edit the files
 2. Shelve the files

You can repeat these steps as many times as necessary.

- For a [post-commit](#) review, or a review where you are not the author:
 1. [Fetch the review's files](#) into a new changelist
 2. Edit the files
 3. Update the changelist's description to include `#review-12345` (separated from other text with whitespace, or on a separate line)
 4. Shelf the changelist's files

Once these steps are complete, further updates involve editing the files, and then shelving the changelist's files.

Warning

If you use an invalid review identifier, it will appear that nothing happens. Swarm is currently unable to notify you of this situation. If the review has not been correctly updated, use the **Add Change** button in the Swarm review heading to add the changelist to the review, see "[Add a changelist to a review](#)" on page 284.

- When you are working with Git Fusion:

Important

You can only update Git Fusion-initiated reviews using Git Fusion.

In the following example, the current Git task branch is `task1`, the target branch is `master`, the review id is `1234`, the Git Fusion hostname is `gfserver`, and the remote repo name is `p4gf_repo`.

1. Fetch the review's head version:

```
$ git fetch --prune origin
From gfserver:p4gf_repo
* [new_branch]      review/master/1234 ->
origin/review/master/1234
x [deleted]         (none)      -> origin/review/dev/new
```

The `--prune` option lets the local Git repo delete the unwanted `review/master/new` reference created by the initial `git push origin task1:review/master/new` command.

2. Check out the review's head version:

```
$ git checkout review/master/1234
```

3. Edit the files as required.
4. Add the edited files to the index of files, in preparation for the next commit.

There are several ways to do this. For example, to add all modified files to the index, run:

```
$ git add -A
```

5. Commit the files in Git:

```
$ git commit -m "made some changes"
```

6. Push the Git changes to the review:

```
$ git push origin review/master/1234
```

Note

If you get review feedback that is better expressed as a Git rebase and cleaned up history, you can make your changes and push them as a new review.

You **cannot** clean up history and then push your changes to the *same* review.

For more information on Git Fusion, see the [Git Fusion Guide](#).

Fetch a review's files

First, determine the changelist containing the review's files:

1. Visit the review's page.
2. The current review version's changelist appears in the file list heading:

```
#3: Change 697707 shelved into //depot/main/swarm
```

In this example, the changelist is `697707`. You use the identified changelist in place of shelved changelist below.

3. Decide whether you will use [P4](#), [P4V](#), or [Git Fusion](#) to fetch the files, and follow the instructions in the appropriate section below.

Using P4

1. For a **shelved changelist**, use a command-line shell and type:

```
$ p4 unshelve -s shelved changelist
```

2. For a committed changelist, use a command-line shell and type:

```
$ p4 sync @committed changelist
```

Note

Your client's view mappings need to include the changelist's path.

Using P4V

For a shelved changelist:

1. Select **Search > Go To**.
2. Change the select box to **Pending Changelist**.
3. Type in the *shelved changelist* number and click **OK**.
4. Select the files in the **Shelved Files** area.
5. Right-click and select **Unshelve**.
6. Click **Unshelve**.

For a committed changelist:

1. Select **Search > Go To**.
2. Change the select box to **Submitted Changelist**.
3. Type in the *submitted changelist* number and click **OK**.

4. Select the files in the **Files** area.
5. Right-click and select **Get this Revision**.
6. Click **Close**.

Using Git Fusion

In the following example, the current local task branch is `task1`, the target branch is `master`, the review id is `1234`, the Git Fusion hostname is `gfserver`, and the remote repo name is `p4gf_repo`.

1. Fetch the review's head version:

```
$ git fetch --prune origin
From gfserver:p4gf_repo
* [new_branch]      review/master/1234 ->
origin/review/master/1234
x [deleted]        (none)      -> origin/review/dev/new
```

The `--prune` option lets the local Git repo delete the unwanted `review/master/new` reference created by the initial `git push origin task1:review/master/new` command.

2. Check out the review's head version:

```
$ git checkout review/master/1234
```

Important

You can only update Git Fusion-initiated reviews using Git Fusion.

For more information on Git Fusion, see the [Git Fusion Guide](#).

Deleting shelves

If you have a number of unused shelves, you can delete them if you want to tidy up your workspace.

Important

By default, when you delete files from a shelved changelist, the files are not removed from the associated review.

However, Swarm can be configured to remove files from a review when they are deleted from an associated shelf, see "[Process shelf file delete when](#)" on page 412.

Do not use the Swarm user that is configured in the [Swarm configuration file](#) when deleting shelves, or deleting files from shelves. The Swarm logic processes the `shelve-delete` trigger event, if the event is invoked by the Swarm user it is rejected. The delete operations will fail.

To delete a shelf from a changelist without removing the shelved files from the associated review, use [P4](#) or [P4V](#) to delete the entire shelf in one operation as described below. This enables you to delete a shelved changelist in your workspace without affecting the associated Swarm review even if Swarm is configured to remove files from a review when they are deleted from a shelf.

Using P4

To delete a shelved changelist without removing the files from the associated review:

1. Use a command-line shell and type:

```
$ p4 shelve -d -c changelist
```

Important

Do not delete the files from the shelf individually. Deleting the entire shelf ensures that files are not removed from an associated review even if Swarm is configured to do so.

2. The shelved files are deleted from the pending changelist.

Using P4V

To delete a shelved changelist without removing the files from the associated review:

1. In P4V, right-click on the pending changelist.
2. Select **Delete Shelved Files**.

Important

Do not delete the files from the shelf individually. Deleting the entire shelf ensures that files are not removed from an associated review even if Swarm is configured to do so.

3. The shelved files are deleted from the pending changelist.

Edit reviewers

A review author, or users with *admin* or *super* privileges are able to edit the reviewers for a review. Reviewers are able to join or leave reviews, or to change whether their vote is required or optional.

Note


If the review includes content that is part of a project or branch with [Retain default reviewers](#) enabled, the following restrictions apply to the review:


- The voting option for a retained default reviewer can only be changed to a stricter level, you cannot reduce the voting level.
- Retained default reviewers cannot be removed from the review.

Additionally, the following individuals may edit reviewers:

- If the review is [moderated](#), the moderators.
- If the review is part of a project, but not moderated, all project members.
- If the review is not part of a project, any authenticated user.

To edit reviewers for a review:

1. Navigate to a review.
2. Click the edit reviewers button , which appears just to the left of reviewer avatars. The **Reviewers** dialog is displayed.

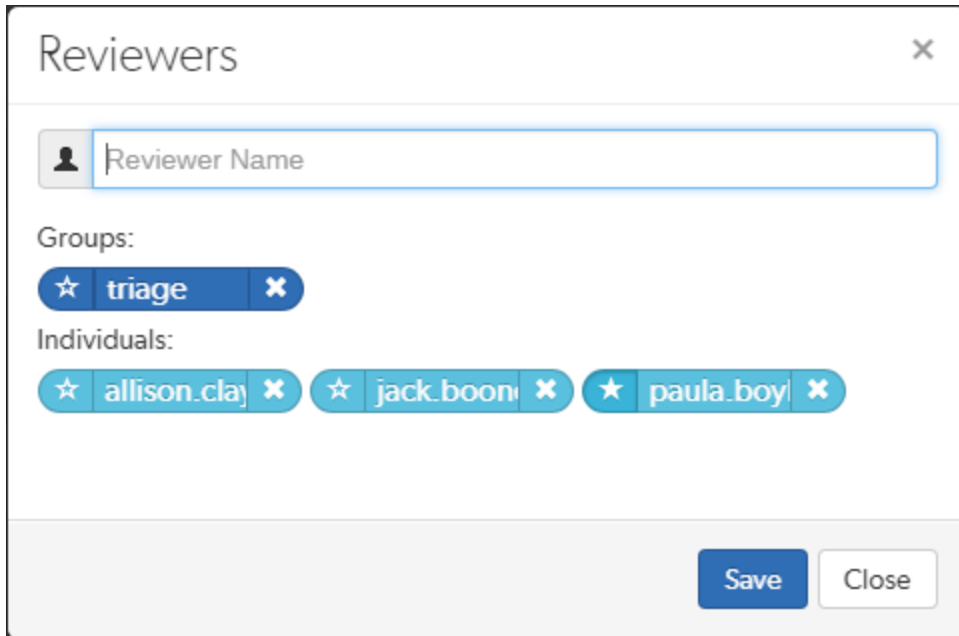

3. Add or remove reviewers, or change the vote requirement.

Use the reviewer search field to find users and groups by name, *userid*, *groupid*. The field auto-completes as you type, click on the user or group to add to the review.

- **Groups:** click the star icon to the left of the *groupid*, and select whether the group is a required reviewer (one vote), a required reviewer (all votes), or an optional reviewer. A solid star means that all group member votes are required to approve a review, a solid star with a 1 inside means at least one group member must vote up and no group members vote down to approve a review, and the outlined star means that the group vote is optional.
- **Users:** click the star icon to the left of the *userid* to toggle whether their vote is required or not. A solid star means that their vote is required to approve a review, whereas the outlined star means that their vote is optional.

Click the **X** icon to the right of the *userid* or *groupid* to remove that reviewer from the review.

4. Click the **Save** button to save any changes made.

Add a changelist to a review

Once a review has been started you can add a changelist to the review. It can be useful to add changelists to an existing review. For example, if follow up changes are made to files in a review or if you need to group a number of changelists under a single review.

The **Add Change** button in the review heading is used to add a changelist to an existing review. The button is not visible if the review is in a state that is protected from change by the review workflow rules. For details of the **On update of a review in an end state** rule, see "[Workflow rules](#)" on page 339.



The options available in the **Add Change** dropdown menu depend on whether the review is pre-commit or post-commit:

■ Pre-commit reviews:

- **Append Pending Changelist:** when you add a pending changelist to a review, the files in the changelist are appended to the existing files in the review, see "[Append a pending changelist to a review](#)" on the next page.
- **Replace with Pending Changelist:** when you add a pending changelist to a review, all of the files in the review are replaced with the files in the changelist you are adding to the review, see "[Replace review with a pending changelist](#)" on page 287.
- **Replace with Committed Changelist:** when you add a committed changelist to a review, all of the files in the review are replaced with the files in the changelist you are adding to the review, see "[Replace review with a committed changelist](#)" on page 289.

Note

If you replace a pre-commit review with a committed changelist, the new version of the review will be a post-commit review.

■ Post-commit reviews:

- **Replace with Pending Changelist:** when you add a pending changelist to a review, all of the files in the review are replaced with the files in the changelist you are adding to the review, see "[Replace review with a pending changelist](#)" on page 287.

Note

If you replace a post-commit review with a pending changelist, the new version of the review will be a pre-commit review.

- **Replace with Committed Changelist:** when you add a committed changelist to a review, all of the files in the review are replaced with the files in the changelist you are adding to the review, see "[Replace review with a committed changelist](#)" on page 289.

Tip

When the content of a review is changed, Swarm checks to see which branches are in the new revision of the review:

- **If a new branch was added to the review:**
 - Default reviewers on the new branch are added to the review.
 - Moderators from the added branch become moderators for the review alongside the existing moderators.
 - **Only if workflow is enabled:** if the new branch is associated with a workflow, the [workflow is merged](#) with the existing workflow. The most restrictive workflow is used for the review.
- **If a branch is no longer part of the review:**
 - Reviewers for the review are not changed.
 - Moderators from the removed branch no longer moderate the review.
 - **Only if workflow is enabled:** if the branch was associated with a workflow, the branch workflow is removed from the review.

Append a pending changelist to a review

The **Append Pending Changelist** option is used to add a pending changelist to a pre-commit review.

Example:

- Original review contains the following files: A#1, B#2, C#1, D#1, and E#4
- Changelist contains the following files: A#2, C#3, E#4 (marked for delete), and F#1
- Appending the changelist to the original review generates a new revision of the review that contains the following files: A#2, B#2, C#3, D#1, E#4 (marked for delete), and F#1

Important

Committing a review with Swarm (recommended): Swarm automatically commits the files in the approved revision of the review.

Committing a review outside of Swarm:

Before you commit the review:

1. Unshelve the review into the pending changelist associated with the review.
2. Reshelve the files in the pending changelist.

3. Commit the pending changelist.
4. This process ensures that all of the files in the approved revision of the review are committed.

Workflow technology preview feature disabled (default):


Swarm can be configured to automatically check that the files being committed match the files in the approved revision of the review, see the [strict](#) trigger option.

Workflow technology preview feature enabled:

Swarm can be configured to automatically check that the files being committed match the files in the approved revision of the review by using the **On commit with a review** workflow rule. For information about the **On commit with a review** rule, see "[Workflow rules](#)" on page 339.

To append a changelist to a review:

1. Click **Add Change** from the review heading.
2. Select **Append Pending Changelist** from the dropdown menu and the append review dialog is displayed with a list of recent pending changelists:

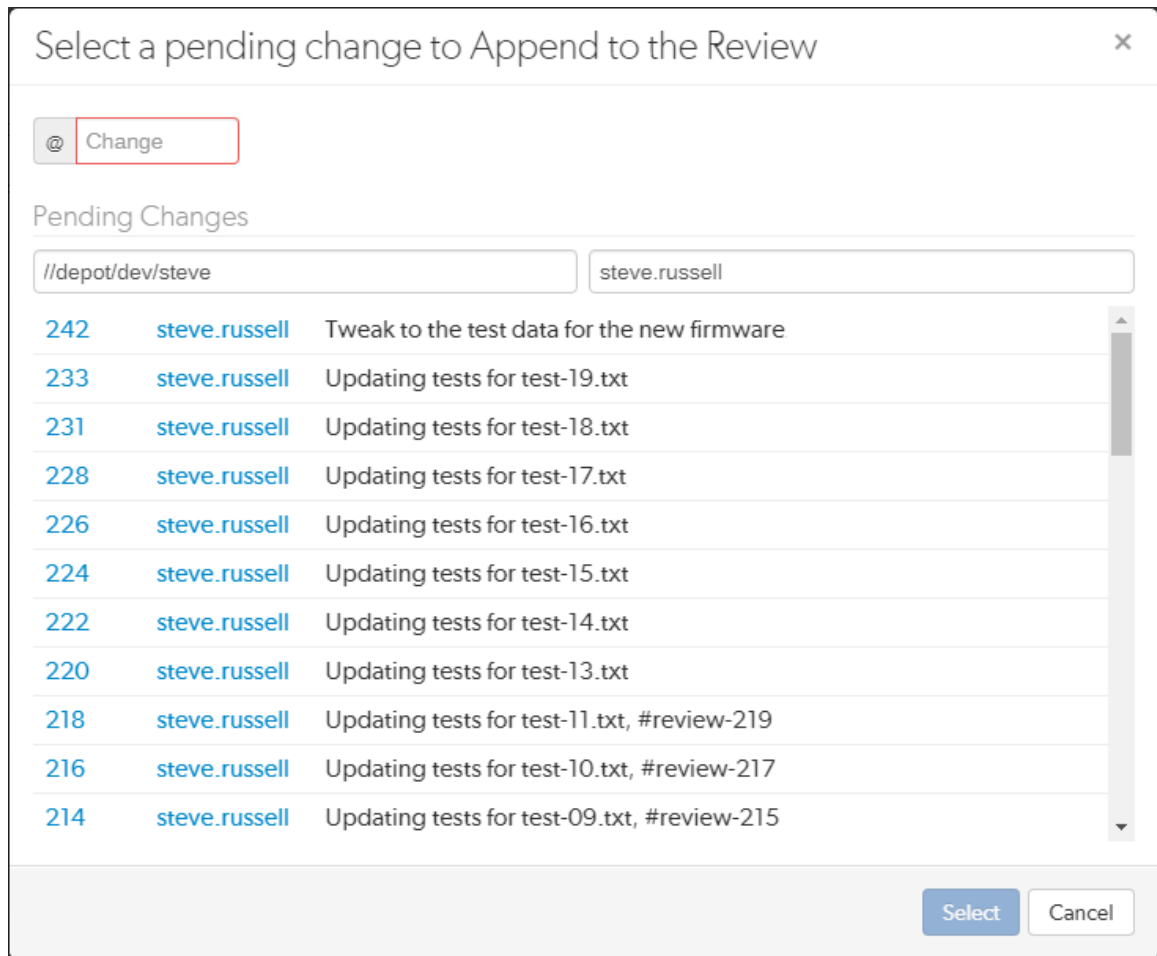

3. Enter the pending changelist number directly in the **@ Change** box, filter by depot path and user, or select a changelist from the list of recent changelists.

Note
The changelist must not be part of another review, if it is Swarm will reject it.

4. Click **Select** to append the changelist to the review, double-click a changelist to do the same.
5. The changelist is appended to the review and the review version is updated.

Replace review with a pending changelist

The **Replace with a Pending Changelist** option is used to replace the files in a review with the files in a pending changelist.

Note

If you replace a post-commit review with a pending changelist, the new version of the review will be a pre-commit review.

Example:


- Original review contains the following files: A#1, B#2, C#1, D#1, and E#4
- Changelist contains the following files: A#2, C#3, E#4 (marked for delete), and F#1
- Replacing the original review with the changelist generates a new revision of the review that contains the following files: A#2, C#3, E#4 (marked for delete), and F#1

Tip

When you replace a review with a changelist, the base versions of the files in the new revision of the review are the base versions of the files in the replacement changelist.

To replace the files in a review with the files in a changelist:

1. Click **Add Change** from the review heading.
2. Select **Replace with a Pending Changelist** from the dropdown menu and the replace review dialog is displayed with a list of recent pending changelists:

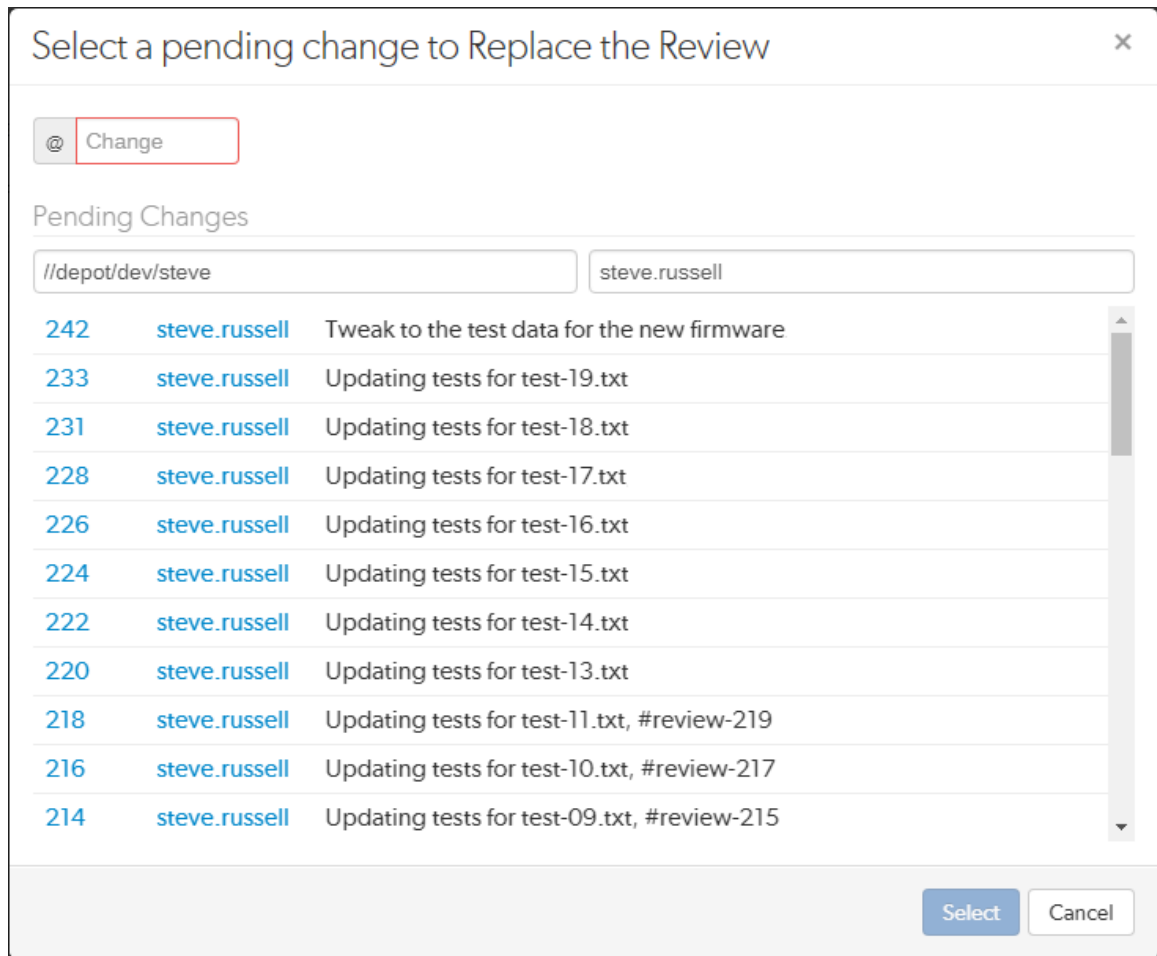

3. Enter the pending changelist number directly in the **@ Change** box, filter by depot path and user, or select a changelist from the list of recent changelists.

Note
The changelist must not be part of another review, if it is Swarm will reject it.

4. Click **Select** to replace the review with the changelist, double-click a changelist to do the same.
5. The changelist files replace the files in the review and the review version is updated.

Replace review with a committed changelist

The **Replace with a Committed Changelist** option is used to replace the files in a review with the files in a committed changelist.

Note

If you replace a pre-commit review with a committed changelist, the new version of the review will be a post-commit review.

Example:

- Original review contains the following files: A#1, B#2, C#1, D#1, and E#4
- Changelist contains the following files: A#2, C#3, E#4 (marked for delete), and F#1
- Replacing the original review with the changelist generates a new revision of the review that contains the following files: A#2, C#3, E#4 (marked for delete), and F#1

Tip

When you replace a review with a changelist, the base versions of the files in the new revision of the review are the base versions of the files in the replacement changelist.

To replace the files in a review with the files in a changelist:

1. Click **Add Change** from the review heading.
2. Select **Replace with a Committed Changelist** from the dropdown menu and the replace review dialog is displayed with a list of recent committed changelists:

3. Enter the committed changelist number directly in the **@ Change** box, filter by depot path and user, or select a changelist from the list of recent changelists.

Note

The changelist must not be part of another review, if it is Swarm will reject it.

4. Click **Select** to replace the review with the changelist, double-click a changelist to do the same.
5. The changelist files replace the files in the review and the review version is updated.

Responsibility

Initially, code reviews have no reviewers.

User and group default reviewers can be set for individual projects and project branches. Each time a new review is created in the project or project branch, the default reviewers will be added to the review. See [default reviewers](#) for details.

Code review authors can designate users as reviewers by including an [@mention](#) for each desired reviewer, and an [@*mention](#) for each required reviewer. They can also designate groups as reviewers by using [@@mention](#) for each desired group reviewer, an [@@*mention](#) for each [required reviewer](#) group (all members required), and an [@@!mention](#) for each [required reviewer](#) group (one vote required). Code review authors can also designate users or groups as reviewers by using the **Edit Reviewers** dialog which allows reviewers to be added, removed, and to configure the reviewer type.

Other users can show their interest in participating in the code review by clicking their own avatar in the **Reviewers** area of the code review and selecting **Join review**, or by commenting on a review or one of its files. Once a user shows such interest, they are added to the review's list of reviewers and share in the responsibility of performing the code review. Later on, reviewers can change whether their vote is required or optional, or leave a review (perhaps to prevent further notifications).

Looking at a [review list](#) can help you determine which reviews have likely not been started, using the **No Reviewers** filter. Once a review has reviewers, it is considered to be active and appears in the review list with the state **Has Reviewers**.

Review participation is *advisory* by default, and is used to inform your team that a code review is being conducted. The disposition of the review is reflected in the review's current state, the badges that may appear over each reviewer's avatar, and any comments reviewers might add.

Moderators

A project moderator is a user assigned to moderate reviews for a specific branch associated with a project.

When the **Only Moderators can approve or reject reviews** restriction is enabled for a project branch, that branch is *moderated*. See [Add a project](#) for details on adding moderators to project branches.

Changing the state of any review associated with a moderated branch is restricted as follows:

- Only moderators can approve or reject the review. Moderators can also transition a review to any other state.

Important

Moderators prevent the automatic approval of reviews. **Workflow is disabled by default:** for more information about automatically approving reviews using workflow rules, see "[Workflow rules](#)" on page 339.

Note

By default, when a review spans multiple branches that have different moderators, only one moderator from any one of the branches needs to approve the review.

Swarm can be configured to require that one moderator from each branch must approve the review, this is a global setting. If a moderator belongs to more than one of the branches spanned by the review, their approval will count for each of the branches they belong to. For instructions on how to configure moderator behavior, see "[Moderator behavior when a review spans multiple branches](#)" on page 411.

- The review's author, when not a moderator, can change the review's state to **Needs Review**, **Needs Revision**, **Archived**, and can attach committed changelists.

Normally, the review's author cannot change the review's state to **Approved** or **Rejected** on moderated branches. However, authors that are also moderators have moderator privileges, and may approve or reject their own review.

When `disable_self_approve` is enabled, authors who are moderators (or even users with admin privileges) cannot approve their own reviews.

- Project members can change the review's state to **Needs Review** or **Needs Revision**, and can attach committed changelists. Project members cannot change the review's state to **Approved**, **Rejected**, or **Archived**.
- Users that are not project members, moderators, or the review's author cannot transition the review's state.
- For the review's author and project members, if a review is not in one of their permitted states, for example if the review's state is **Rejected**, they cannot transition the review to another state.

These restrictions have no effect on who can start a review.

Required reviewers

Reviews can optionally have required reviewers. When a review has required reviewers, the review cannot be approved until all required reviewers and required reviewer groups have up-voted the review. If the review is associated with a project that has assigned moderators, even the moderators cannot approve the review without up-votes from all required reviewers (but they can reject the review).

When a group is a required reviewer, it can be set to operate in one of two ways:

- **All votes required:** all members of the group must up-vote the review to allow the review to be approved.

- **One vote required:** at least one member of the group must up-vote the review to allow the review to be approved. If any member of the group down-votes the review, the review cannot be approved.

Required reviewers are expected to take greater care while performing a review than non-required reviewers, as their votes affect whether a review can be approved or not.

To edit the reviewers for a review, and to change whether a reviewer is required or not, see "[Edit reviewers](#)" on page 282.

Note

If a review involves a branch with assigned moderators, only a moderator can approve the review, even if all required reviewers have up-voted the review.

See [Add a project](#) for details on adding moderators to project branches.

Add yourself as a reviewer

1. Visit the review's page.
2. Log in, if you have not already done so.
3. Click your avatar in the **Reviewers** area of the review display, which should be grayed out since you are not yet a reviewer. A dropdown menu appears.
4. Select **+ Join Review**. Alternatively, you can select **^ Vote Up** or **v Vote Down** if you approve or disapprove of the review, respectively; either will cast your vote and make you a reviewer.

Your avatar is no longer grayed out, and you are now a reviewer.

Remove yourself as a reviewer

1. Visit the review's page.
2. Log in, if you have not already done so.
3. Click your avatar in the **Reviewers** area of the review display, which should not be grayed out since you are already a reviewer. A dropdown menu appears.
4. Select **X Leave Review**.

Your avatar is now grayed out, and you are no longer a reviewer.

Review workflow

There are many possible code review workflows. The section describes typical scenarios for a code review that Swarm can handle.

Basic review workflow

This section describes a basic workflow when reviewing code with Swarm.

Another developer reviews your code

1. You request a code review with a shelved change.
2. Another developer, Bill, sees the email notification from Swarm, clicks the review link in the email, and begins looking at the diffs in the files belonging to the review. Curious about an implementation detail, Bill clicks the line he's curious about and adds his query in a Swarm comment.
3. You receive an email notification regarding Bill's query. His query prompts you to clarify the code, say by renaming some variables and adding some better descriptive text in the surrounding code comments. You then update the review with your changes.
4. Bill sees the email notification that you have updated the review. He checks out the change, likes what he sees, and marks the review **Approved**.
5. You see the email notification that Bill has approved your review, so you commit your code.

You review another developer's code

1. Another developer, Charlie, requests a code review with a shelved change.
2. You receive an email notification from Swarm, click the review link in the email, and begin looking at the diffs in the files in the review. You don't like what you see, as Charlie has tried to fix a bug using a technique you have already tried previously and know to be incorrect. You add comments to the code that needs attention, flag your comments as **tasks**, and mark the review **Needs Revision**.
3. Charlie receives an email notification regarding your review, but disagrees with you, and adds his own comments justifying his implementation.
4. You receive an email notification regarding Charlie's comment. The technique is somewhat complicated, so rather than attempt to describe how it is incorrect, you unshelve the review's code to your own workspace, change Charlie's code, and shelve your changes. Swarm updates the review with your new code.
5. Charlie receives an email notification regarding your updates to the review. He's still unconvinced, but he unshelves your changes to try them in his local workspace. He finds that your implementation works better, but sees a couple of areas where there could be improvements. He reshelves his latest work to update the review.
6. You receive an email notification regarding Charlie's updates, check out his changes, and realize that Charlie's work is now moot because the customer has revised his plans. You add a comment to the review reporting that fact, and **Reject** the review.

Additional workflow tasks

This section describes additional workflow tasks that can be used with the [basic workflow](#) described above.

Remove a file from a review

Important

Swarm must be configured to use this function, see ["Process shelf file delete when"](#) on page 412.

When configured, Swarm will automatically remove files from a review when they have been deleted from an associated shelved changelist and the review is in a specified state. Typically Swarm is configured to remove files from a review when the review state is **Needs Review** and **Needs Revision** but not when it is any other state.

To remove a file from a review using P4V:

1. Right-click the shelved file you want to remove from the review.
2. Select **Delete**, and click **Yes** when prompted to confirm the deletion.
3. The file is removed from the associated review if the review is in one of the states specified in the Swarm configuration.

Tip

If you want to tidy up your workspace by deleting an unused shelf without removing the files from an associated review, see ["Deleting shelves"](#) on page 281.

Revert the content of a review to match an earlier review revision

If the content of the latest revision of a review contains changes you want to rollback, or is created by mistake, you can revert the review content to match an earlier revision of the review. This section describes the process for reverting the content of a review.

Tip

- Reverting the content of a review increments the review revision, it does not change the review revision to the revision you are reverting to.
- It is good practice to update the review description, or add a comment, so that users know that you have reverted the review with files from an earlier revision.

To revert the content of a review:

1. Find the changelist number for the review revision you want to revert to.

Tip

The changelist numbers in a review can be found using the review revision selector on the review page, see [Select review revisions to view](#).

2. Unshelve the changes from the changelist you found in the previous step.
3. Create a new changelist and shelve the changes into the new changelist.
4. Use Swarm to navigate to the review you want to revert.
5. Click **Add Change** in the review heading, and select **Replace with Pending Changelist** from the dropdown list.
6. The **Select a pending change to Replace the Review** dialog is displayed.
7. Select the new changelist you shelved the files in and click **Select**.
8. The new changelist files replace the files in the review and the review revision is updated.

Fix a review if it has been replaced with the wrong changelist

If you or another user has replaced the files in your review with the wrong changelist, you can fix the mistake so that the review contains the correct files.

For example:

1. Create a pending changelist with files A^{#1}, and B^{#1}, this is changelist 250.
2. Request a review of changelist 250 using Swarm by clicking the **Request Review** button on the changelist page.
 - Revision 1 of review 251 is created containing files A^{#1}, and B^{#1}.
3. Go to review 251 in Swarm, click the **Add Change** button, select **Replace with Committed Changelist**, and select changelist 241. Changelist 241 contains files X^{#1}, and Y^{#1}.
 - This replaces the files in the review with the files in changelist 241.
 - Revision 2 of review 251 is created, containing only files X^{#1}, and Y^{#1}.
4. You realize that you have made a mistake, you meant to append changelist 242 to review 251.

Fix the mistake:

Review-251 should contain files A^{#1}, and B^{#1} from changelist 250 and files C^{#1}, and D^{#1} from changelist 242.

Tip

It is good practice to update the review description, or add a comment, so that users know why you

have changed the files in the review.

1. Go to review 251 in Swarm, click the **Add Change** button, select **Replace with Pending Changelist**, and select changelist 242. Changelist 242 contains files C^{#1}, and D^{#1}.
 - This replaces the files in the review with the files in changelist 242.
 - Revision 3 of review 251 is created, containing files C^{#1}, and D^{#1}.
2. Edit the description of changelist 250 to change **#review-251** to **#append-251**, this changes the add mode for review-251 to append.
3. Shelve your files in pending changelist 250. Changelist 250 contains files A^{#1}, and B^{#1}. This appends the files to the review because that is the default add mode for review-251.
 - Revision 4 of review 251 is created, containing files A^{#1}, B^{#1}, C^{#1}, and D^{#1}.

Review creation, and modification outside of Swarm

You can create a review and add a changelist to a review from outside of Swarm by adding keywords to the changelist description. The keyword is processed by Swarm when the changelist is shelved for review, when files in a pending changelist that is associated with a review are reshelved, and when a changelist is committed. For details on using a keyword to create a review and add a changelist to a review, see ["Create a review" on page 406](#) and ["Add a changelist to a review" on page 406](#).

Note

Swarm acts on the first valid keyword it finds in the changelist description, Swarm then ignores any further valid keywords it finds in the description.

Tip

When the content of a review is changed, Swarm checks to see which branches are in the new revision of the review:

- **If a new branch was added to the review:**
 - Default reviewers on the new branch are added to the review.
 - Moderators from the added branch become moderators for the review alongside the existing moderators.
 - **Only if workflow is enabled:** if the new branch is associated with a workflow, the [workflow is merged](#) with the existing workflow. The most restrictive workflow is used for the review.

- **If a branch is no longer part of the review:**
 - Reviewers for the review are not changed.
 - Moderators from the removed branch no longer moderate the review.
 - **Only if workflow is enabled:** if the branch was associated with a workflow, the branch workflow is removed from the review.

The following examples show how adding keywords to the changelist descriptions works in practice. In each case, you are collaborating with other users to produce a single review in Swarm:

Basic workflow using #review, and #append in the changelist description

1. You create a review with files A^{#1}, B^{#1}, and C^{#1} by using **#review** in the changelist description.
2. Review-xxxx is created and **#review** is automatically replaced with **#review-xxxx** in the changelist description.
3. User-2 appends their changelist that contains files C^{#2}, D^{#1}, and E^{#1} to review-xxxx by using **#append-xxxx** in the changelist description.
 - Review-xxxx now contains files A^{#1}, B^{#1}, C^{#2}, D^{#1}, and E^{#1}.
 - The default add mode for review-xxxx is now append because User-2 added the changelist to the review using **#append-xxxx**.
4. You edit files A^{#1}, and B^{#1} in your changelist so they become A^{#2}, and B^{#2}. The changelist description still contains **#review-xxxx**.
5. You shelve your pending changelist which has **#review-xxxx** in the changelist description, this appends the files to the review because that is the default add mode for review-xxxx.
 - Review-xxxx now contains files A^{#2}, B^{#2}, C^{#2}, D^{#1}, and E^{#1}.

Advanced workflow using #review, and #append in the changelist description

1. You create a review with files A^{#1}, and B^{#1} by using **#review** in the changelist description.
2. Review-xxxx is created and **#review** is automatically replaced with **#review-xxxx** in the changelist description.
3. User-2 appends their changelist that contains file C^{#1} to review-xxxx by using **#append-xxxx** in the changelist description.
 - Review-xxxx now contains files A^{#1}, B^{#1}, C^{#1}.
 - The default add mode for review-xxxx is now append because User-2 added the changelist to the review using **#append-xxxx**.

4. User-3 adds their changelist that contains files A^{#2}, and D^{#1} to review-xxxx by using **#review-xxxx** in the changelist description. This appends the files to the review because that is the default add mode for review-xxxx.
 - Review-xxxx now contains files A^{#2}, B^{#1}, C^{#1}, and D^{#1}.
5. You edit files A^{#2}, and B^{#1} in your changelist so they become A^{#3}, and B^{#2} and you add file E^{#1}. The changelist description still contains **#review-xxxx**.
6. You shelve your pending changelist which has **#review-xxxx** in the changelist description, this appends the files to the review because that is the default add mode for review-xxxx.
 - Review-xxxx now contains files A^{#3}, B^{#2}, C^{#1}, D^{#1}, and E^{#1}.

Advanced workflow using #review, #append, and #replace in the changelist description

1. You create a review with files A^{#1}, and B^{#1} by using **#review** in the changelist description.
2. Review-xxxx is created and **#review** is automatically replaced with **#review-xxxx** in the changelist description.
3. User-2 appends their changelist that contains file C^{#1} to review-xxxx by using **#append-xxxx** in the changelist description.
 - Review-xxxx now contains files A^{#1}, B^{#1}, C^{#1}.
 - The default add mode for review-xxxx is now append because User-2 added the changelist to the review using **#append-xxxx**.
4. User-3 replaces review-xxxx with their changelist that contains files A^{#2}, and D^{#1} to review-xxxx by using **#replace-xxxx** in the changelist description.
 - Review-xxxx now contains files A^{#2}, and D^{#1}.
 - The default add mode for review-xxxx is now replace because User-3 added the changelist to the review using **#replace-xxxx**.
5. You edit files A^{#2}, and B^{#1} in your changelist so they become A^{#3}, and B^{#2} and you add file E^{#1}. The changelist description still contains **#review-xxxx**.
6. You shelve your pending changelist which has **#review-xxxx** in the changelist description, this replaces the files in the review because that is the default add mode for review-xxxx.
 - Review-xxxx now contains files A^{#3}, B^{#2}, and E^{#1}.

States

Reviews can be in one of several states. The biggest differentiator is whether the review's files have any outstanding, uncommitted changes or not.

Whenever a review state changes, an email notification is sent to all review participants, including:

- The review author
- Any user who comments on the review or its files
- Any user who has changed the review's state previously
- Any user who is [@mentioned](#), or a member of a group that is [@@mentioned](#) in the review's description or comments.

The review state is indicated by the **Review state** button on the [Review display](#) page. The review state button is used to change the state of a review, see ["Change review state" on page 302](#).

Code reviews can be in one of the following states:

- **Needs review:** The review has started and the changes need to be reviewed.
- **Needs revisions:** The changes have been reviewed and the reviewer has indicated that further revisions are required.
- **Approved:** The review has completed. The changes may need to be committed. If the changes have been committed then this review will be Approved and closed, otherwise it will be Approved and open. See the note [below](#).
- **Rejected:** The review has completed. The changes are undesirable and should not be committed.
- **Archived:** The review has completed for now. However, it is neither rejected nor approved; it is simply put aside in case it is needed in the future.

Note

By default, when an **Approved** review is committed or updated, Swarm changes the state to **Needs Review** if the files have been modified since the review was approved. Files are considered modified if the list of involved files changes, or if the file content or file-type changes.

If one or more files in a review has the filetype `+k (ktext)`, this behavior is undesirable because the files will appear to be modified when the Helix Server replaces RCS keywords with their current values. See ["Unapprove modified reviews" on page 438](#) to see how to disable this behavior.

Self-approval by review authors

By default, review authors can approve their own reviews. This behavior is based on Swarm's [advisory nature](#).

Self-approval by authors can be prohibited on a project-by-project basis by specifying moderators for project branches (see ["State change restrictions with moderation" on the next page](#)). However, authors who are moderators can self-approve their own reviews.

Administrators can configure Swarm to prevent all self-approval by review authors. See ["Disable self-approval of reviews by authors" on page 410](#).

State change restrictions with moderation

Typically, any authenticated user can change the state of a review (remember that the review state is merely advisory in most cases).

When the **Only Moderators can approve or reject reviews** restriction is enabled for a project branch, that branch is *moderated*. See [Add a project](#) for details on adding moderators to project branches.

Changing the state of any review associated with a moderated branch is restricted as follows:

- Only moderators can approve or reject the review. Moderators can also transition a review to any other state.

Important

Moderators prevent the automatic approval of reviews. **Workflow is disabled by default:** for more information about automatically approving reviews using workflow rules, see ["Workflow rules" on page 339](#).

Note

By default, when a review spans multiple branches that have different moderators, only one moderator from any one of the branches needs to approve the review.

Swarm can be configured to require that one moderator from each branch must approve the review, this is a global setting. If a moderator belongs to more than one of the branches spanned by the review, their approval will count for each of the branches they belong to. For instructions on how to configure moderator behavior, see ["Moderator behavior when a review spans multiple branches" on page 411](#).

- The review's author, when not a moderator, can change the review's state to **Needs Review**, **Needs Revision**, **Archived**, and can attach committed changelists.

Normally, the review's author cannot change the review's state to **Approved** or **Rejected** on moderated branches. However, authors that are also moderators have moderator privileges, and may approve or reject their own review.

When `disable_self_approve` is enabled, authors who are moderators (or even users with admin privileges) cannot approve their own reviews.

- Project members can change the review's state to **Needs Review** or **Needs Revision**, and can attach committed changelists. Project members cannot change the review's state to **Approved**, **Rejected**, or **Archived**.
- Users that are not project members, moderators, or the review's author cannot transition the review's state.
- For the review's author and project members, if a review is not in one of their permitted states, for example if the review's state is **Rejected**, they cannot transition the review to another state.

These restrictions have no effect on who can start a review.

Required reviewers

Reviews can optionally have required reviewers. When a review has required reviewers, the review cannot be approved until all required reviewers and required reviewer groups have up-voted the review. If the review is associated with a project that has assigned moderators, even the moderators cannot approve the review without up-votes from all required reviewers (but they can reject the review).

When a group is a required reviewer, it can be set to operate in one of two ways:

- **All votes required:** all members of the group must up-vote the review to allow the review to be approved.
- **One vote required:** at least one member of the group must up-vote the review to allow the review to be approved. If any member of the group down-votes the review, the review cannot be approved.

Required reviewers are expected to take greater care while performing a review than non-required reviewers, as their votes affect whether a review can be approved or not.

To edit the reviewers for a review, and to change whether a reviewer is required or not, see ["Edit reviewers" on page 282](#).

Note

If a review involves a branch with assigned moderators, only a moderator can approve the review, even if all required reviewers have up-voted the review.

See [Add a project](#) for details on adding moderators to project branches.

Change review state

The **Review state** dropdown button on the ["Review display" on page 262](#) page is used to manually change the state of a Swarm review.

To change the state of the review:

1. Navigate to the review you want to update.
2. Click the **Review State** dropdown button.
3. Select the new state from the dropdown menu.

The options available depend on the current state of the review and your user permissions:

- **Needs Revision:** select to request changes to the files in the review.
- **Needs Review:** select to request further review of the changes.
- **Approve** (only available if the voting requirements for the review are satisfied. For information on voting requirements, see ["Required reviewers" on page 292](#).): select to approve the review.
- **Commit** (only available for [pre-commit](#) reviews that have been approved): select to commit the review.


- **Approve and Commit** (only available for unapproved [pre-commit](#) reviews when the voting requirements for the review are satisfied. For information on voting requirements, see ["Required reviewers" on page 292.](#)): select to approve and commit the review in a single step, see ["Approve and Commit" below.](#)
- **Archive**: select to archive the review.
- **Obliterate Review** (by default, only available for users with *admin* or *super* user rights): see ["Obliterate Review" on page 417.](#)

Approve and Commit

Approve and Commit is available in the dropdown menu for unapproved reviews, this enables you to approve and commit a review in a single step if required.

Note

- By default, any authorized user can commit a review. Swarm can be configured to restrict this behavior so that only the review author can commit the review, see ["Disable commit" on page 422](#) for details.
- **Approve and Commit** is only available for unapproved [pre-commit](#) reviews when the voting requirements for the review are satisfied. For information on voting requirements, see ["Required reviewers" on page 292.](#)

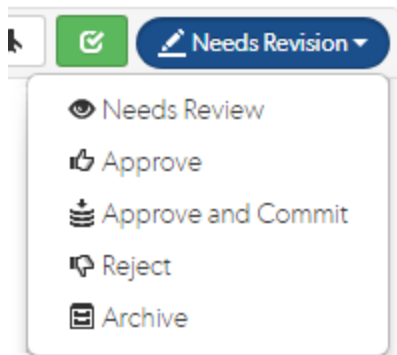

Note

If Swarm is configured to prevent approval of reviews with open tasks and a review has open tasks, the **Approve**, and **Approve and Commit** options will not be available for the review. This option is configured by an administrator, see ["Prevent Approve for reviews with open tasks" on page 411.](#)

To approve, or approve and commit a review with open tasks, you must address the tasks first and then set them to **Task Addressed**, or **Not a Task**, see ["Set a task to Task Addressed or Not a Task" on page 199](#) for details.

1. Select **Approve and Commit** from the dropdown menu.
2. The **Commit Review** dialog is displayed.

Commit Review ✕

```
Use the new P4 Core package names for specifying dependencies.  
  
Also update the copyright and release information on the meta files.
```

[job083648](#) fixed Need to rename the packages to be helix-insights rather than performe-...

Job Status on Commit Remove pending changelists

3. Edit the review description if required.
4. Select which jobs should be associated with the review, and specify the job status on commit.
5. Select **Remove pending changelists**, Swarm will attempt to automatically clean up any changelists left behind after the review has been committed, including removing any shelved files. This option can be removed by an administrator, see ["Review cleanup" on page 402](#) for details.
6. Click **Approve and Commit** to approve the review and commit the associated files.

Note

By default, Swarm records that you committed the review on behalf of the review's author. This can be configured by an administrator to only credit the committer and not the review author, see ["Commit credit" on page 370](#) for details.

7 | Groups

Groups are a feature of Helix Server that makes it easier to manage permissions for users. Swarm can use groups to coordinate review activities and responsibilities. This chapter covers how to manage groups in Swarm, including how to:

- "Add a group" below
- "Edit a group" on page 312
- "Delete a group" on page 312

See "Groups" on page 220 for an introduction to Swarm groups.

Add a group

Important

You must have *super* privileges in Helix Server (**p4d**), or have *admin* privileges in **p4d** version 2012.1 or later, to create a group. If you do not have sufficient permissions, Swarm does not display the **Add Group** button.

1. Click the **Groups** link in the main toolbar to display the groups listing page.
2. Click the **+ Add Group** button.

The Add Group **Settings** tab is displayed:

The screenshot shows the 'Add Group' settings form. At the top, there's a title 'Add Group' and two tabs: 'Settings' (which is selected) and 'Notifications'. Below the tabs, there are four main sections: 'Name' with a text input field containing the placeholder 'Name'; 'Description' with a large text area containing the placeholder 'Description'; 'Owners' with a dropdown menu containing the placeholder 'Add an Owner'; and 'Members' with a dropdown menu containing the placeholder 'Add a User or Subgroup'. At the bottom of the form, there are two buttons: 'Save' and 'Cancel'.

3. Provide a name for the group.
4. **Optional:** provide a description.
5. **Optional:** specify an owner. This field auto-suggests users within Helix Server as you type.
Once specified, modifying the group's definition is restricted to group owners and users with *super* privileges in Helix Server.
If you do not specify an owner, you must specify at least one member (below).
6. **Optional:** specify group members. This field auto-suggests projects, groups, and users within Helix Server as you type (up to a combined limit of 20 entries).
If you specify a project, the project's members become members of the group. If you specify a group, that group becomes a sub-group of your new group, and all of its members (and members of any of its sub-groups) become members of your new group.
If you do not specify any members, you must specify at least one owner (above).

7. You now have two options, either:

- Click **Save** to finish adding the group. By default group members will be emailed when a new review is requested.

Note

The **Save** button is disabled if any required fields are empty.

or

- **Optional:** configure email notifications for the group in the Add Group, Notifications tab. See the next step for details.

8. **Optional:** click the **Notifications** tab to configure group email notifications.

Add Group

[Settings](#) [Notifications](#)

Use mailing list instead of notifying by individual group member's emails (must add email address)

Group mailing list address

Email Notifications Email members when a new review is requested

Email members when a change is committed

Adjust when notifications are sent to group members (use mailing list address to enable).

Email group members when:

[Reset to default](#)

Check all

The group is a member of a project, and

a review is started in the project

a review or change is committed

The group is a reviewer on a review, and

files in the review are updated

tests on the review have finished

a vote is cast on a review

the state of the review changes

someone joins or leaves the review

a review or change is committed

a comment is made on the review

a comment on the review is updated

The group is a moderator on a project, and

files in the review are updated

tests on the review have finished

a review or change is committed

Save

Cancel

9. **Optional:** add a group mailing list address by selecting **Use mailing list instead of notifying by individual group member's emails (must add email address)** and entering a valid group email address.

Note

- **Group mailing list enabled:** notifications are sent to the group email address.
- **Group mailing list disabled:** notifications are sent to the group members individual email addresses.

The format of the email address is validated as you type.



10. Group members can be notified when a member of the group starts a review. Group members can be notified when a change is committed by, or on behalf of, a changelist owner who is also a member of this group. These settings are always available even if the group mailing list is not enabled.

Select which actions send a notification to the group:

- **Email members when a review is requested:** When any member of this group creates a review, this group will be notified.
- **Email members when a change is committed:** When a change is committed into Perforce, if the owner of the changelist is a member of this group, this group will be notified.

Tip

When a user commits a changelist in Swarm, it is committed on behalf of the changelist owner. If the changelist owner is a member of this group, this group will be notified.

Note

Members of your group may receive notification emails even if group notifications are disabled as they may be members of a project, or follow a project or user, or Swarm's review daemon functionality may be enabled. See [Notifications](#) for details.

11. Group notification settings allow you to configure which notifications are sent to the group mailing list when events occur within Swarm (the group mailing list must be enabled). This allows you to limit the number of emails sent to the group mailing list. These settings apply across all projects.

Note

The following group notification settings are only available if the group mailing list address is configured.

Note

Defaults for these options are configured by the Swarm administrator, and they may force some of these options to on or off. See "[Global settings](#)" on [page 395](#) for how this is configured.

Adjust when notifications are sent to group members.

Email group members when: Reset to default

Check all

The group is a member of a project, and	
a review is started in the project	<input checked="" type="checkbox"/>
a review or change is committed	<input checked="" type="checkbox"/>
The group is a reviewer on a review, and	
files in the review are updated	<input checked="" type="checkbox"/>
tests on the review have finished	<input checked="" type="checkbox"/>
a vote is cast on a review	<input checked="" type="checkbox"/>
the state of the review changes	<input checked="" type="checkbox"/>
someone joins or leaves the review	<input checked="" type="checkbox"/>
a review or change is committed	<input checked="" type="checkbox"/>
a comment is made on the review	<input checked="" type="checkbox"/>
a comment on the review is updated	<input checked="" type="checkbox"/>
The group is a moderator on a project, and	
files in the review are updated	<input checked="" type="checkbox"/>
tests on the review have finished	<input checked="" type="checkbox"/>
a review or change is committed	<input checked="" type="checkbox"/>

Save
Cancel

Toggle notifications for each event on or off to control whether the group receives an email when that event occurs.

Clicking **Reset to default** resets the options back to system defaults.

12. Click **Save**.

Note

The **Save** button is disabled if any required fields are empty.

Edit a group

Important

You must be an owner of a group, or be a user with *super* privileges in Helix Server, to edit a group.

1. Visit the group page you want to edit.
2. Click the **Settings** tab for the group to edit group details. If you do not have permission to edit a group, this tab does not appear.
3. Edit group details as required. See "[Add a group](#)" on page 305 for more details.
4. Click the **Notifications** tab for the group to edit group notifications. If you do not have permission to edit a group, this tab does not appear.
5. Edit group notifications as required. See "[Add a group](#)" on page 305 for more details.
6. Click **Save**.

Note

When a group is edited, the list of associated reviews is not immediately updated to match any changes in membership. The association with a review does not change until the review is updated.

Delete a group

Important

You must be an owner of a group, or be a user with *super* privileges in Helix Server, to delete a group.

1. Visit the group page you want to delete.
2. Click the **Settings** tab for the group. If you do not have permission to edit a group, this tab does not appear.
3. Click **Delete**.
A tooltip is displayed to confirm that you want to delete this group.
4. Click **Delete** to confirm.

8 | Projects

A Swarm project is a group of Helix Server users who are working together on a specific codebase, defined by one or more branches of code, along with a job filter, and automated test integration. This chapter covers Swarm's project management capabilities, including how to:

- "Add a project" below
- "Edit a project" on page 329
- "Membership" on page 329
- "Delete a project" on page 336

See "Projects" on page 223 for an introduction to Swarm projects.

Add a project

1. On the Swarm **Projects** page, click the **+ Add Project** button.

Note

The ability to add projects can be [limited to administrators only](#), or [limited to members of specific groups](#). When limited, users who are not administrators, or a member of the specified group, will not see the **+ Add Project** button.

The **Add Project** page is displayed:

2. Provide a name for the project.
3. **Optional:** provide a description.
4. **Optional:** select the **Only Owners and Administrators can edit the project** checkbox. When checked, a field is displayed allowing you to add a new owner. The field auto-suggests users within Helix Server as you type.

Note

You cannot specify a [group](#) as an owner.

Once specified, modifying the project's definition is restricted to project owners and administrators (users with *admin*-level or *super*-level privileges in Helix Server).

5. Specify at least one team member. This field auto-suggests projects, groups, and users within Helix Server as you type (up to a combined limit of 20 entries).

Important

During project creation, if you do not have *admin* privileges and you do not add yourself as a member or as an owner, you cannot edit this project's configuration later.

See "[Membership](#)" on page 329 for more details.

6. Default reviewers:

- a. **Optional:** specify **Default Reviewers** for the project.

This field auto-suggests users, and groups within Helix Server as you type (up to a combined limit of 20 entries). Click on the user or group to add them as a default reviewer. Each time a new review is created, the default reviewers will be added to the review.

- **Users:** click the star icon to the left of the *userid* to toggle whether their vote is required or not. A solid star means that their vote is **required** to approve a review, whereas the outlined star means that their vote is optional.
- **Groups:** click the star icon to the left of the *groupid*, and select whether the group is a **required reviewer (one vote)**, a **required reviewer (all votes)**, or an optional reviewer. A solid star means that all group member votes are required to approve a review, a solid star with a 1 inside means at least one group member must vote up and no group members vote down to approve a review, and the outlined star means that the group vote is optional.

Click the **X** icon to the right of the *userid* or *groupid* to remove that default reviewer from the default reviewers list.

Important

When a review is part of multiple projects/project branches:

- The default reviewer lists for all of the projects and project branches the review is part of are combined and added to the review.
- If a default reviewer has different reviewer options set on projects and project branches that the review is part of, the strictest reviewer option is used for the review.

Example: A review is created and it is part of **Project A**, **Project B**, and **Project Branch b**.

Project A: default reviewer X is an Optional reviewer

Project B: default reviewer X is an Optional reviewer

Project Branch b: default reviewer X is a Required reviewer

Result: default reviewer X is added to the review as a Required reviewer

Note

If users or groups are **@mentioned** in a new changelist description that includes **#review**, they will be added to the review as reviewers. If any of these reviewers are already specified as default reviewers they will not be added to the review again, the reviewer's most restrictive reviewer option is used for the review.

Note

If a default reviewer is deleted from Helix Server they will not be added to new reviews.

- b. **Optional:** click the **Retain default reviewers** checkbox to prevent default reviewers being removed from reviews associated with this project.

For more information about retained default reviewers, see [Retain default reviewers](#).

7. **Optional:** click the **Private** checkbox to make this project private. Private projects and their associated reviews are only visible to project owners, moderators, and members, plus users with *super* privileges in Helix Server.

For more information, see "[Private projects](#)" on page 228.

8. **Optional:** set the **Minimum up votes** required for reviews associated with this project.

When **Minimum up votes** is set on a project, the project setting is used on the project branches unless **Minimum up votes** is set to **1** or higher on a branch. In this case the branch setting is used and the project setting is ignored.

A review cannot be approved until all of the [Required reviewers](#) have voted up the review and the **Minimum up votes** specified has been satisfied.

- If a review spans projects/branches, the Minimum up votes for **each** of the projects and branches must be satisfied before you can approve the review.
- Required reviewers are included when up votes are counted.
- When **Count votes up from** is set for a workflow associated with a project/branch, only the up votes of members of the project contribute to satisfying the **Minimum up votes** for a project/branch. For more information about the **Count votes up from** rule, see "[Workflow rules](#)" on page 339.

Important

If the Workflow technology preview feature is disabled (default), all votes are counted not just votes from project members.

Important

If the **Minimum up votes** required is set higher than the number of reviewers that exist for a review, approval will be blocked for that review. This is true even if all the reviewers on the review have voted up the review.

9. **Optional** (only displayed if the Workflow feature is enabled): associate a workflow with the project.

To remove the existing workflow without replacing it with another workflow, select **No Workflow** from the **Workflow** dropdown list. This is the default when you create a new project.


To associate a workflow, select the workflow from the **Workflow** dropdown list, or enter the workflow name in the search field. The field auto-suggests workflows as you type. Only workflows that you own, and shared workflows are shown in the dropdown list.

Tip

- When a workflow is associated with a project, the workflow is used for all of the branches in that project.
- When a project branch is associated with a workflow, the workflow of the parent project is ignored and the branch workflow is used.

For more information about workflows and how project workflows interact with branch workflows, see ["Workflow basics" on page 341](#).

10. **Optional:** click **+ Add Branch** to display the branch drop-down dialog.

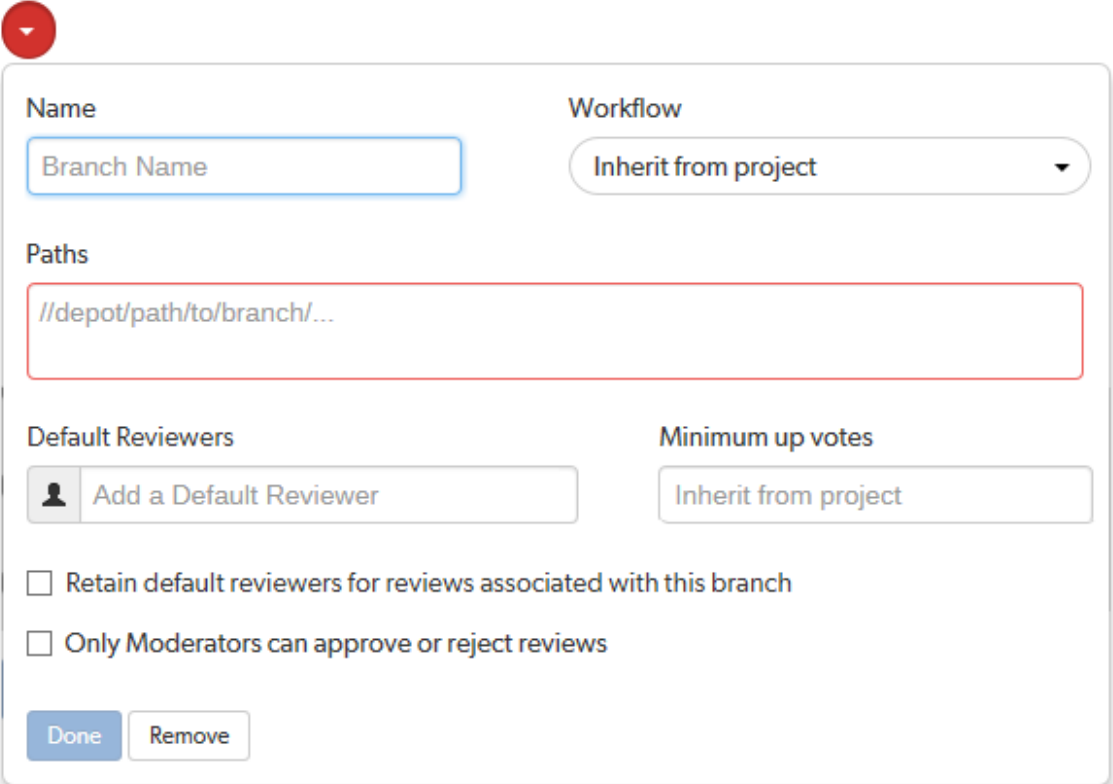

A red circular button with a white downward-pointing triangle is positioned above the dialog box. The dialog box is a rounded rectangle with a light gray border and a white background. It contains several sections: 'Name' with a text input field containing 'Branch Name'; 'Workflow' with a dropdown menu showing 'Inherit from project'; 'Paths' with a text input field containing '//depot/path/to/branch/...'; 'Default Reviewers' with a button that says 'Add a Default Reviewer' next to a person icon; 'Minimum up votes' with a dropdown menu showing 'Inherit from project'; two checkboxes with labels 'Retain default reviewers for reviews associated with this branch' and 'Only Moderators can approve or reject reviews'; and two buttons at the bottom, 'Done' and 'Remove'.

Name
Branch Name

Workflow
Inherit from project

Paths
//depot/path/to/branch/...

Default Reviewers
Add a Default Reviewer

Minimum up votes
Inherit from project

Retain default reviewers for reviews associated with this branch

Only Moderators can approve or reject reviews

Done Remove

- a. Enter a short **Name** for your branch.
- b. **Optional** (only displayed if the Workflow feature is enabled): associate a workflow with the project branch.

To use the parent project workflow, select **Inherit from project** from the **Workflow** dropdown list. This is the default when you create a new branch. If the parent project is set to **No workflow**, the branch will use the global workflow rules.

To associate a workflow, select the workflow from the **Workflow** dropdown list, or enter the workflow name in the search field. The field auto-suggests workflows as you type. Only workflows that you own, and shared workflows are shown in the dropdown list.

Tip

- When a workflow is associated with a project, the workflow is used for all of the branches in that project.
- When a project branch is associated with a workflow, the workflow of the parent project is ignored and the branch workflow is used.

For more information about workflows and how project workflows interact with branch workflows, see "[Workflow basics](#)" on page 341.

- c. Enter one or more branch paths in the **Paths** field using depot syntax, one path per line.

Tip

- Branch paths, and files can be excluded by putting a minus symbol – at the start of the path.
- Branch paths are processed in order, starting with the first file path in the list.

For example:

```
//depot/main/swarm/...  
-//depot/main/swarm/test/...  
//depot/main/swarm/test/ResultSummary.html
```

The first path includes all of the directories and files under `//depot/main/swarm/` in the project branch.

The second path excludes all of the files in `-//depot/main/swarm/test/` from the project branch.

The third path includes the `ResultSummary.html` file from the previously excluded `//depot/main/swarm/test/` directory.

Note

- Wildcards should not be used; the only exception is that the branch path can end with the Helix Server wildcard `...`
- Branch paths are case sensitive.
- Branch paths, and files are not checked to see if they are valid when you save the branch:
 - If you enter an invalid path ending in the wildcard `...`, the path will not be displayed in the [project file browser](#) until the path is created. This allows you to specify a path before it has been created.
 - If you enter a path that ends with a file that has not been committed, or a non-existent file, Swarm displays a 404 error when you navigate the path to the file with the [project file browser](#).

Note

The [Project Commits tab](#) can fail to show some Helix Server commits in the top level view. Individual branch views display the commits correctly:

The **Project Commits** tab top level client view is made up of all of the branches of the project.

For example, Project Alpha:

Branch: QA:
`//depot/alpha/dev/QA/...`

Branch: Dev :
`//depot/alpha/dev/...`
`-//depot/alpha/dev/QA/...`

The project commits tab view is generated by processing the branches in the order that they were created in and from top to bottom for the paths in each of those branches.

For the project Alpha example above:

The first path includes all of the directories and files under `//depot/alpha/dev/QA/` in the project commits tab top level view.
The second path includes all of the directories and files under `//depot/alpha/dev/` in the project commits tab top level view.
The third path excludes all of the directories and files in `//depot/alpha/dev/QA/` from the project commits tab top level view.

Result: commits made to `//depot/alpha/dev/QA/` that should be shown for the **QA** branch are not displayed in the **Project Commits** tab top level view.

When you have a simple branch structure this can be avoided by considering this issue when you create your branches. In the example above, creating the **Dev** branch first and then creating the **QA** branch avoids the problem because `//depot/alpha/dev/QA/` is not excluded from the **Project Commits** tab top level view.

- d. **Optional:** specify **Default Reviewers** for the project branch.

This field auto-suggests users, and groups within Helix Server as you type (up to a combined limit of 20 entries). Click on the user or group to add them as a default reviewer. Each time a new review is created, the default reviewers will be added to the review.

- **Users:** click the star icon to the left of the *userid* to toggle whether their vote is required or not. A solid star means that their vote is **required** to approve a review, whereas the outlined star means that their vote is optional.
- **Groups:** click the star icon to the left of the *groupid*, and select whether the group is a **required reviewer (one vote)**, a **required reviewer (all votes)**, or an optional reviewer. A solid star means that all group member votes are required to approve a review, a solid star with a 1 inside means at least one group member must vote up and no group members vote down to approve a review, and the outlined star means that the group vote is optional.

Click the **X** icon to the right of the *userid* or *groupid* to remove that default reviewer from the default reviewers list.

Important

When a review is part of multiple projects/project branches:

- The default reviewer lists for all of the projects and project branches the review is part of are combined and added to the review.
- If a default reviewer has different reviewer options set on projects and project branches that the review is part of, the strictest reviewer option is used for the review.

Example: A review is created and it is part of **Project A**, **Project B**, and **Project Branch b**.

Project A: default reviewer X is an Optional reviewer

Project B: default reviewer X is an Optional reviewer

Project Branch b: default reviewer X is a Required reviewer

Result: default reviewer X is added to the review as a Required reviewer

Note

If users or groups are **@mentioned** in a new changelist description that includes **#review**, they will be added to the review as reviewers. If any of these reviewers are already specified as default reviewers they will not be added to the review again, the reviewer's most restrictive reviewer option is used for the review.

Note

If a default reviewer is deleted from Helix Server they will not be added to new reviews.

- e. **Optional:** click the **Retain default reviewers for reviews associated with this branch** checkbox to prevent default reviewers being removed from reviews associated with this branch.

For more information about retained default reviewers, see [Retain default reviewers](#).

- f. **Optional:** set the **Minimum up votes** required for reviews associated with this branch.

To inherit the parent project setting, leave **Minimum up votes** unset. This is the default when you create a new branch.

To use the branch setting and ignore the parent project setting, set **Minimum up votes** to **1** or more on the branch.

A review cannot be approved until all of the [Required reviewers](#) have voted up the review and the **Minimum up votes** specified has been satisfied.

- If a review spans projects/branches, the Minimum up votes for **each** of the projects and branches must be satisfied before you can approve the review.
- Required reviewers are included when up votes are counted.
- When **Count votes up from** is set for a workflow associated with a project/branch, only the up votes of members of the project contribute to satisfying the **Minimum up votes** for a project/branch. For more information about the **Count votes up from** rule, see "[Workflow rules](#)" on page 339.

Important

If the Workflow technology preview feature is disabled (default), all votes are counted not just votes from project members.

Important

If the **Minimum up votes** required is set higher than the number of reviewers that exist for a review, approval will be blocked for that review. This is true even if all the reviewers on the review have voted up the review.

- g. **Optional:** check the **Only Moderators can approve or reject reviews** checkbox. When checked, a field is displayed allowing you to add a new moderator. The field auto-suggests groups and users within Helix Server as you type.

If a group is specified as a moderator, all of the members of that group have the same moderator privileges for that project branch as if they were added individually.

Once the branch specification is complete and the project has been saved, changing the state of any review associated with this moderated branch is restricted as follows:

- Only moderators can approve or reject the review. Moderators can also transition a review to any other state.

Important

Moderators prevent the automatic approval of reviews. **Workflow is disabled by default:** for more information about automatically approving reviews using workflow rules, see ["Workflow rules" on page 339](#).

Note

By default, when a review spans multiple branches that have different moderators, only one moderator from any one of the branches needs to approve the review.

Swarm can be configured to require that one moderator from each branch must approve the review, this is a global setting. If a moderator belongs to more than one of the branches spanned by the review, their approval will count for each of the branches they belong to. For instructions on how to configure moderator behavior, see ["Moderator behavior when a review spans multiple branches" on page 411](#).

- The review's author, when not a moderator, can change the review's state to **Needs Review**, **Needs Revision**, **Archived**, and can attach committed changelists.

Normally, the review's author cannot change the review's state to **Approved** or **Rejected** on moderated branches. However, authors that are also moderators have moderator privileges, and may approve or reject their own review.

When `disable_self_approve` is enabled, authors who are moderators (or even users with admin privileges) cannot approve their own reviews.

- Project members can change the review's state to **Needs Review** or **Needs Revision**, and can attach committed changelists. Project members cannot change the review's state to **Approved**, **Rejected**, or **Archived**.
- Users that are not project members, moderators, or the review's author cannot transition the review's state.

- For the review's author and project members, if a review is not in one of their permitted states, for example if the review's state is **Rejected**, they cannot transition the review to another state.

These restrictions have no effect on who can start a review.

- h. Click the **Done** button to accept your branch specification.

Once the branch definition has completed, if any moderators were specified, the number of moderators for that branch is displayed in the list of branches:

Branches	Design	▼	2 Moderators
	Main	▼	2 Moderators
	Candidate	▼	3 Moderators
	+ Add Branch		

11. **Optional:** specify a job filter. The job filter allows you to specify criteria that are used to associate jobs with projects. For example, entering **Subsystem=ProjectA** associates jobs whose **subsystem** field is set to **ProjectA** with the current project.

Note

This job filter is simpler than the filters available in other Helix Server clients. The filter must be expressed as **field=value** pairs; bare keywords are not permitted. The asterisk for wildcard matching is permitted, but no other filter expression syntax is permitted.

12. By default, project members and moderators are notified when a new review is started. Project members, moderators, and followers are notified when a change is committed.

Select which actions send a notification:

- **Email members and moderators when a new review is requested:** When a new review is requested for the project, all project members and moderators of the project are added to the email notification list.
- **Email members, moderators and followers when a change is committed:** When a change is committed for the project, all project members, project moderators and project followers of this project are added to the email notification list.

Note

- When a group is a project member or project moderator, all of the members of that group are notified using the same logic as for individual project members and moderators.
- Any "[@mention](#)" on [page 241](#) users and groups, or users and groups who are explicitly added to a review or changelist, will receive notifications even if new review/committed review notifications are disabled.

13. **Optional:** click the **Enable** checkbox beside **Automated Tests** to display the automated tests configuration fields.

Specify a URL that triggers a test execution. Use the special arguments described in the dialog to help compose a URL that informs your test suite with important details. For more details, see "[Integrate your test suite to inform review acceptance or rejection](#)" on [page 74](#)

14. **Optional:** click the **Enable** checkbox beside **Automated Deployment** to display the automated deployment configuration fields.

Specify a URL that triggers a deployment of the project's code. Use the special arguments described in the dialog to help compose a URL that informs your deployment program with important details. For more details, see "[Automatically deploy code within a review](#)" on [page 78](#)

15. Click **Save**.

Note

The **Save** button is disabled if any required fields are empty.

Important

It is possible to create a project that you cannot edit. This can happen if you have specified owners but not yourself as an owner, or if you have not specified yourself as a member. Swarm can detect some (but not all) such situations when you save a project; when it does detect such a situation, a warning dialog is displayed.

If you see this dialog, click **Continue** to save the project without your ownership/membership, or click **Cancel** within the dialog to continue editing the project. The project page's **Save** and **Cancel** buttons are disabled while this dialog is visible.

Edit a project

1. Visit the project page you want to edit.
2. Click **Settings** in the project's toolbar.
3. Edit the project's details as required. See ["Add a project" on page 313](#) for more details.

Tip

If sharing is switched off for a workflow, any projects or branches that were associated with the workflow while it was shared will remain associated with it.

If you edit a project or branch associated with that unshared workflow, you will still see the name of the workflow in the **Workflow** field, even if you don't own that workflow. If you remove that workflow from the project/branch you will not be able to see the workflow in the **Workflow** dropdown list unless you own it.

4. Click **Save**.

Note

By default, any member of a project can edit the project's configuration. Administrators can configure Swarm to prevent changes to the project's name and branch definition(s). See ["Projects" on page 399](#) for details.

Membership

Membership in a Swarm project identifies users as belonging to the project, making them part of the team.

There are only a few notable differences between project members and non-members:

Difference	Member	Non-Member	Description
"Notifications" on page 233	✓	✗	Members receive project notifications; non-members do not.
"Avatars" on page 243	✓	✗	The project's home page features member's avatars.
"States" on page 299	✓	✗	Members can transition code review states; non-members cannot.

There are two ways to become a member of a project in Swarm:

1. Add a project and make yourself a member.
2. Ask a member of an existing project to add you as a member.

Note

If the project has any [owners](#) specified, you need to ask a project owner to add you as a member.

Note

Users with *super* privileges in Helix Server can always adjust the settings for any project, including adjusting membership.


Add a member

If you are an owner of a project, or a member of a project without specified owners:

1. Visit the project page that needs the new member.
2. Click **Settings** in the project's toolbar.

3. The **Members** text field lets you specify a Swarm project, Helix Server group, or Helix Server user to add to the members for this project. The field auto-suggests *projectids*, *groupids*, and *userid*s by matching what you have typed so far against the list of users in the Helix Server.

When you specify a project or group, all of the members of that project or group become members of this project. Swarm does not display all of the individual users, but it does provide a visual separation: project or group names are displayed first, with a darker blue background.

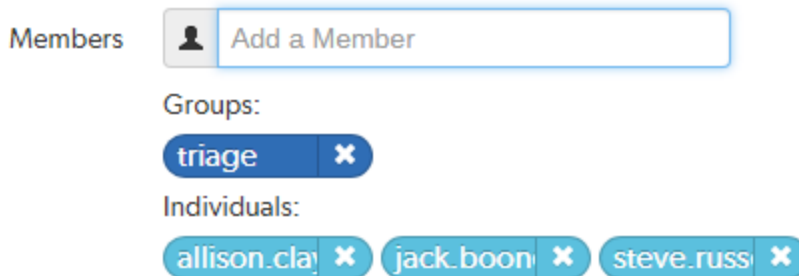

When you hover your mouse over a member project or group, a tooltip appears displaying up to 100 of the *userid*s of the project's or group's users.

4. Click **Save**.

Remove a member

If you are an owner of a project, or a member of a project without specified owners:

1. Visit the project page that has a member you want to remove.
2. Click **Settings** in the project's toolbar.

Known members of the project are displayed beneath the **Members** text field, with a medium blue button representing projects or groups and a light blue button representing individual users.

3. Click the **X** next to the project id, group id, or userid you want to remove.
4. Click **Save**.

Warning

You are able to remove your own membership or ownership. Doing so could prevent you from managing the project.

Owners

A project *owner* is a Helix Server user that controls the configuration for a project. An owner does not need to be a member of a project, but once **Only Owners and Super Users can edit the project** has been set, only an owner or user with *super* privileges in Helix Server can edit any project settings.

Moderators

A project *moderator* is a user assigned to moderate reviews for a specific branch associated with a project. See how to [specify moderators](#).

When **Only Moderators can approve or reject reviews** is set for a project branch, changing the state of any review associated with the moderated branch is restricted as follows:

- Only moderators can approve or reject the review. Moderators can also transition a review to any other state.

Important

Moderators prevent the automatic approval of reviews. **Workflow is disabled by default:** for more information about automatically approving reviews using workflow rules, see "[Workflow rules](#)" on page 339.

Note

By default, when a review spans multiple branches that have different moderators, only one moderator from any one of the branches needs to approve the review.

Swarm can be configured to require that one moderator from each branch must approve the review, this is a global setting. If a moderator belongs to more than one of the branches spanned by the review, their approval will count for each of the branches they belong to. For instructions on how to configure moderator behavior, see "[Moderator behavior when a review spans multiple branches](#)" on page 411.

- The review's author, when not a moderator, can change the review's state to **Needs Review**, **Needs Revision**, **Archived**, and can attach committed changelists.

Normally, the review's author cannot change the review's state to **Approved** or **Rejected** on moderated branches. However, authors that are also moderators have moderator privileges, and may approve or reject their own review.

When `disable_self_approve` is enabled, authors who are moderators (or even users with admin privileges) cannot approve their own reviews.

- Project members can change the review's state to **Needs Review** or **Needs Revision**, and can attach committed changelists. Project members cannot change the review's state to **Approved**, **Rejected**, or **Archived**.
- Users that are not project members, moderators, or the review's author cannot transition the review's state.
- For the review's author and project members, if a review is not in one of their permitted states, for example if the review's state is **Rejected**, they cannot transition the review to another state.

These restrictions have no effect on who can start a review.

Default reviewers

User and group default reviewers can be set for individual projects and project branches. Each time a new review is created in the project or project branch, the default reviewers will be added to the review. See [projects](#) and [project branches](#) for adding default reviewers.

- A user can be set as a [required reviewer](#) or an optional reviewer.
- A group can be set as a [required reviewer \(one vote\)](#), a [required reviewer \(all votes\)](#), or an optional reviewer.

Important

When a review is part of multiple projects/project branches:

- The default reviewer lists for all of the projects and project branches the review is part of are combined and added to the review.
- If a default reviewer has different reviewer options set on projects and project branches that the review is part of, the strictest reviewer option is used for the review.

Example: A review is created and it is part of **Project A**, **Project B**, and **Project Branch b**.

Project A: default reviewer X is an Optional reviewer

Project B: default reviewer X is an Optional reviewer

Project Branch b: default reviewer X is a Required reviewer

Result: default reviewer X is added to the review as a Required reviewer

Note

If users or groups are [@mentioned](#) in a new changelist description that includes [#review](#), they will be added to the review as reviewers. If any of these reviewers are already specified as default reviewers they will not be added to the review again, the reviewer's most restrictive reviewer option is used for the review.

Note

If a default reviewer is deleted from Helix Server they will not be added to new reviews.

Retain default reviewers

By default, default reviewers can be removed from an individual review by using the [edit reviewers](#) button on the review display page. Individual projects and branches can be configured to prevent default reviewers from being removed from individual reviews. For instructions on how to enable **Retain default reviewers** for a project or branch, see [project](#) or [project branch](#).

Retain default reviewers basics

- Retained default reviewers can be added or removed by editing the project or project branch. Each time a review is updated in the project or branch, the list of default reviewers is checked.
 - Any new default reviewers are added to the review.
 - If a default reviewer has been removed from the project/branch, they will remain on the review. They are no longer a retained default reviewer and can be removed from the review if required.
 - If a review is updated and it is no longer associated with the project/branch, the default reviewers for that project/branch will remain on the review. They are no longer retained default reviewers and can be removed from the review if required.

A review is checked when:

- The [review state](#) changes
 - A new revision of the review is created
 - A [comment task state](#) is changed
 - A user votes on the review, or clears their vote
 - [Reviewers are edited](#) on the review
 - The [review author is changed](#)
- Retained default reviewers cannot be removed from a review by [editing reviewers](#) in the review.
 - The retained default reviewer voting option cannot be reduced in a review by [editing reviewers](#) in the review.

Example: if a user is a [Required reviewer](#), the voting option cannot be reduced to a less strict option such as [Optional reviewer](#).
 - The retained default reviewer voting option can be made stricter for a review by [editing reviewers](#) in the review.

Example: if a group is an [Optional reviewer](#), the voting option can be increased to a stricter option such as [Required reviewer \(one vote\)](#).

Reviews spanning multiple projects and branches

Related projects and branches

When a review spans related projects and branches and a user/group is a retained default reviewer in one but a standard default reviewer in the other, the branch voting option is used for the user/group reviewer in the review.

Example:

- **Review 5678:** spans **Project A**, and **Branch A-1**.
- **Project A:**
 - **User-X:** Required reviewer
 - **Retain default reviewers:** Enabled.
 - **Branch A-1:** a child of **Project A:**
 - **User-X:** Optional reviewer
 - **Retain default reviewers:** Disabled.
- **Review:**
 - **User-X:** Optional reviewer, not a retained default reviewer.
The project voting option is ignored and the branch voting option is used.
There is no restriction on changing the default reviewer voting option.
The default reviewer can be removed from the review.

Unrelated projects and branches

When an individual user/group default reviewer is retained for some of the projects and branches the review spans but not for others, the strictest voting option is used for a default reviewer on the review. The strictest retained default reviewer voting option is the minimum voting option for the user/group default reviewer in the review.

Example:

- **Review 1234:** spans **Project A**, **Project C**, and **Branch F-1**.
- **Project A:**
 - **Group-D:** Optional reviewer.
 - **Retain default reviewers:** Enabled.
- **Project C:**
 - **Group-D:** Required reviewer (all votes).
 - **Retain default reviewers:** Disabled.
- **Branch F-1:** not related to **Project A** or **Project C**:
 - **Group-D:** Required reviewer (one Vote)
 - **Retain default reviewer:** Enabled.
- **Review:**
 - **Group-D:** Required reviewer (All votes), retained default reviewer.
The strictest voting option is used for the default reviewer.
You can edit the voting option on the review. The minimum voting option is the strictest of the retained reviewer voting options. In this case that is, Required reviewer (one vote).
The reviewer cannot be removed from the review.

Delete a project

Note

- Users with *super* or *admin* privileges in Helix Server can delete projects.
- Project owners can delete projects that they own.
- If a project has no owners, any member of the project can delete the project.

When you delete a project:

- The deleted project is removed from the Swarm project list on the dashboard, and from project searches.
- The deleted project is removed from the profile page of the project owners, members, moderators, and followers.
- The project name is removed from the **Project** column on the "[Reviews list](#)" on page 256 page.
- Reviews that belong to the deleted project are not changed. The open and closed reviews remain accessible, their [review states](#), [comments](#), and [tasks](#) can be modified as normal.
- Reviews that belong to the deleted project, the project branch name link in the [review heading](#) is replaced with a link to the common depot location that contains the files included in the review.

Note

The deleted project name cannot be reused for a new project. This behavior is not case sensitive, this means that if you delete a project called **Project B** you cannot create a new project called **project b**.

Use the following steps to delete a project:

1. Visit the project page you want to remove.
2. Click **Settings** in the project's toolbar.
3. Click **Delete**.
A tooltip appears to confirm whether you want to delete this project.
4. Click **Delete** to confirm.

9 | Workflows - Technology preview feature

Warning

Workflow is a [technology preview feature](#) and is disabled by default.

This chapter covers Swarm workflow management, including:

- ["Workflow overview" below](#)
- ["Add a workflow" on page 348](#)
- ["Edit a workflow" on page 352](#)
- ["Delete a workflow" on page 353](#)

Related information:

- For an details on listing, searching, and viewing workflows, see ["Workflows - Technology preview feature" on page 229](#).
- For instructions on how to add a workflow to a project, see [Add a workflow to a project](#).
- For instructions on how to add a workflow to a branch, see [Add a workflow to a project branch](#).
- **Administrators:** For information about configuring the global workflow rules, see [Global workflow rules](#).

Workflow overview

Warning

Workflow is a [technology preview feature](#) and is disabled by default.

A workflow can be applied to a project or project branch to ensure that changelists and code reviews in the project/branch follow the rules specified in that workflow. The ["Workflow basics" on page 341](#) section gives an overview of global workflow rules, workflow rules and how they interact with each other. There are also examples of different workflows and examples of what happens when a changelist spans multiple projects or project branches that have different workflows.

- For information about the workflow rules that are available, see ["Workflow rules" on the next page](#).
- For information about Swarm basic workflow, see ["Workflow basics" on page 341](#).
- For examples of different workflows, see ["Example workflows" on page 342](#).
- For detailed information about how different workflows are merged, see ["Merging multiple workflows" on page 345](#).

Workflow rules

A workflow is made up of the following workflow rules:

On commit without a review:

This rule is applied when a changelist without an associated review is submitted from outside of Swarm.

Select one of the following options:

- **Allow:** the changelist is not checked, the changelist is submitted without a review.
- **Create a review:** the changelist is submitted and a review is created automatically for the changelist.
- **Reject:** the changelist submit is rejected.

Tip

The selected rule is also applied when a changelist is submitted with `#review` in the description. For more information about creating a review by including a keyword in the changelist description, see ["Create a review" on page 406](#).

On commit with a review: This rule is applied when:

- A Swarm review is committed.
- A changelist with an associated review is submitted from outside of Swarm.

Select one of the following options:

- **Allow:** the changelist review state is not checked. The changelist is committed even if its associated review is not approved.
- **Reject unless approved:** the changelist is only submitted if its associated review is approved and the content of the changelist is identical to the content of the approved review.

Tip

The selected rule is also applied when a changelist is submitted with `#review-nnnnn`, `#replace-nnnnn`, or `#append-nnnnn` in the description (**nnnnn** = review ID). For more information about adding a changelist to a review by including a keyword in the changelist description, see ["Add a changelist to a review" on page 406](#).

On update of a review in an end state:

Used to stop review content being changed for reviews that are in specific states. By default, the protected end states are **Archived**, **Rejected**, and **Approve:Commit**. The end states are set by the Swarm administrator, see [end_states](#).

This rule is applied when a changelist is added to a review.

Select one of the following options

- **Allow:** the review is not checked. The changelist is added to the review no matter what the review state is. This is the default setting.
- **Reject:** if the review is in one of the states specified in the `end_state` configurable:
 - The **Add Change** button is disabled for the review.
 - The changelist is rejected if it is added outside of Swarm using `#review-nnnnn`, `#replace-nnnnn`, or `#append-nnnnn` in the description (`nnnnn` = review ID).

Count votes up from:

By default, all of the up votes on a review are counted for the **Minimum up votes** value set on the project/branch the review is associated with. Limit the up votes that are counted to just the members of the project the review is associated with by using this rule.

This rule is applied when a user votes on a review.

Select one of the following options:

- **Anyone:** votes are counted for all reviewers on a review. This is the default setting.
- **Members:** only the up votes of members of the project the review is associated with are counted for the **Minimum up votes** set on projects/branches.

Tip

For instructions on how to set **Minimum up votes** for projects and branches, see [Project minimum up votes](#) and [Branch minimum up votes](#).

Automatically approve reviews:

By default, reviews must be manually approved. Enable automatic approval of reviews with this rule.

This rule is applied when a user votes on a review, a required reviewer is added to a review, or a required reviewer is made an optional reviewer on a review.

Select one of the following options:

- **Never:** reviews are not automatically approved. This is the default setting.
- **Based on vote count:** reviews are automatically approved if:
 - There are no down votes on the review.
 - There are no moderators on the review. If a review has moderators it cannot be automatically approved.
 - All of the [Required reviewers](#) on the review have voted up.
 - The **Minimum up votes** on the review has been satisfied for **each** of the projects and branches the review spans.

Important

Moderators prevent the automatic approval of reviews. For more information about moderators, see "[Moderators](#)" on page 291.

Tip

After a review has been automatically approved it needs to be manually committed.

For information about creating a new workflow, see "[Add a workflow](#)" on page 348.

Workflow basics

- **Workflows:** can be associated with projects and/or project branches.
 - A workflow can be created by any Swarm user.
 - If a workflow is associated with any projects or project branches, that workflow cannot be deleted.
 - A workflow can be shared by the workflow owner.
 - A shared workflow can be viewed by any Swarm user.
 - A shared workflow can be applied to a project or project branch by any Swarm user that is authorized to edit the project.
 - If sharing is switched off for a workflow, any projects or branches associated with that workflow will remain associated with it.

- **Projects and branches:**
 - When a workflow is associated with a project, the workflow is used for all of the branches in that project.
 - When a project branch is associated with a workflow, the workflow of the parent project is ignored and the branch workflow is used. The project workflow is replaced by the branch workflow, the workflows are not merged. For examples of why you might use this, see ["Restrictive project workflow with a less restrictive development branch workflow"](#) on the next page, and ["Project workflow with a more restrictive release branch workflow"](#) on page 344.
 - When a branch is associated with a workflow and a global workflow rule is enforced (set to **policy** mode) by the administrator, the workflow of the parent project is ignored and the global workflow rule is merged with the branch workflow. The most restrictive rule is used.
- **Modifying a workflow:**
 - If a global workflow rule is set to **default** mode and that rule is modified, projects and branches that do not have an associated workflow will use the modified rule.
 - If a global workflow rule is set to **policy** mode and the rule is modified, the entire Helix Core Server will use the modified rule.
 - If a workflow is modified, any projects or branches associated with that workflow will use the modified workflow.
- **Global workflow rules:** configured by the Swarm administrator in [Global workflow](#), each rule can be set in one of two modes:
 - **Default mode:** the global workflow rule is used for projects and branches that do not have an associated workflow.
 - If a project or branch has an associated workflow, the global rule is ignored for that project or branch.
 - If projects are not used, the global workflow rule applies to the entire Helix Core Server.
 - **Policy mode:** the global workflow rule is used for the entire Helix Core Server. This allows a minimum workflow to be set for the Helix Server.
 - The global workflow rule is merged with the workflow associated with a project or branch. The most restrictive rule is used.

Example workflows

This section contains examples of typical workflows that can be configured in Swarm.

Enforce a pre-commit review workflow

To enforce a [pre-commit](#) review workflow set the rules to:

- **On commit without a review:** set to **Reject**, ensures that changelist cannot be submitted without an approved review.
- **On commit with a review:** set to **Reject unless approved**, ensures that if a changelist already has an associated review, that review is approved and the content of the changelist is identical to the content of the approved review.

Allow a post-commit review workflow

To allow a [post-commit](#) review workflow set the rules to:

- **On commit without a review:** set to **Create a review**, ensures that all submitted changelists have a review.
- **On commit with a review:** set to **Allow**, enables changelists that already have an associated review to be submitted.

Restrictive project workflow with a less restrictive development branch workflow

The release and main branches need a restrictive workflow to protect the codelines. All submissions must have an associated approved review and the content of the changelist must be identical to the content of the approved review.

The development branch can be less restrictive because you want to get features in quickly and review them after they have been committed. In this scenario you would probably want to ensure that all submitted changelists have an associated review.

Project workflow:

- **On commit without a review:** set to **Reject**, ensures that changelist cannot be submitted without an approved review.
- **On commit with a review:** set to **Reject unless approved**, ensures that if a changelist already has an associated review, that review is approved and the content of the changelist is identical to the content of the approved review.
- **On update of a review in an end state:** set to **Reject**, ensures that the content of reviews that are considered complete cannot be changed. These end states are set by the Swarm administrator, see "[Protected end states](#)" on page 411.
- **Count votes up from:** set to **Members**, ensures that only the up votes of members of the project the review is associated with are counted for the **Minimum up votes** set on projects/branches.
- **Automatically approve reviews:** set to **Never**, ensures that reviews are not automatically approved.

Development branch workflow:

- **On commit without a review:** set to **Create a review**, ensures that all submitted changelists have a review.

- **On commit with a review:** set to **Allow**, enables changelists that already have an associated review to be submitted.
- **On update of a review in an end state:** set to **Reject**, ensures that the content of reviews that are considered complete cannot be changed. These end states are set by the Swarm administrator, see "[Protected end states](#)" on page 411.
- **Count votes up from:** set to **Anyone**, ensures that votes of all reviewers on a review are counted for the **Minimum up votes** set on projects/branches.
- **Automatically approve reviews:** set to **Based on vote count**, ensures that reviews are automatically approved when all of the review requirements have been satisfied.

Project workflow with a more restrictive release branch workflow

The project is set up with workflow that allows post commit reviews, this allows you to get features in quickly and review them after they have been committed. In this scenario it is a good idea make all submitted changelists have an associated review.

The release branch needs a more restrictive workflow to protect the codeline. All submissions must have an associated approved review and the content of the changelist must be identical to the content of the approved review.

Project workflow: defines the workflow for the project and its branches.

- **On commit without a review:** set to **Create a review**, ensures that all submitted changelists have a review.
- **On commit with a review:** set to **Allow**, enables changelists that already have an associated review to be submitted.
- **On update of a review in an end state:** set to **Allow**, allows the content of reviews that are considered complete to be changed.
- **Count votes up from:** set to **Anyone**, ensures that votes of all reviewers on a review are counted for the **Minimum up votes** set on projects/branches.
- **Automatically approve reviews:** set to **Based on vote count**, ensures that reviews are automatically approved when all of the review requirements have been satisfied.

Release branch workflow: defines the workflow for the release branch. The workflow of the parent project is ignored and the development branch workflow is used.

- **On commit without a review:** set to **Reject**, ensures that changelist cannot be submitted without an approved review.
- **On commit with a review:** set to **Reject unless approved**, ensures that if a changelist already has an associated review, that review is approved and the content of the changelist is identical to the content of the approved review.
- **On update of a review in an end state:** set to **Reject**, ensures that the content of reviews that are considered complete cannot be changed. These end states are set by the Swarm administrator, see "[Protected end states](#)" on page 411.

- **Count votes up from:** set to **Members**, ensures that only the up votes of members of the project the review is associated with are counted for the **Minimum up votes** set on projects/branches.
- **Automatically approve reviews:** set to **Never**, ensures that reviews are not automatically approved.

Merging multiple workflows

If a changelist spans multiple projects that have different workflows, the workflows are merged and the most restrictive workflow rules are used for the changelist.

Example 1: Changelist 1234 spans Project A, Project B, and Project C

- **Project A:** //depot/jam/lib/...
- **Project B:** //depot/jam/docs/...
- **Project C:** //depot/common/src/...
- **Changelist 1234** contains the following files:
 - //depot/jam/lib/tests/checkLoad.sh
 - //depot/jam/docs/basics.workflow.html
 - //depot/common/src/index.html

The files span all three locations so the changelist is subject to the combined workflow rules for the three locations. The most restrictive workflow is used for the changelist:

	Changelist without a review	Changelist with a review	On update of a review in an end state	Count votes up from	Automatically approve reviews
Project A workflow	Allow	Reject unless approved	Allow	Anyone	Based on vote count
Project B workflow	Allow	Reject unless approved	Reject	Members	Never
Project C workflow	Create a review	Allow	Allow	Anyone	Based on vote count
Changelist 1234 workflow	Create a review	Reject unless approved	Reject	Members	Never

Tip

The three workflows are combined and the most restrictive workflow rules are used for the changelist.

Example 2: Changelist 6789 spans Project M, Project N, and Project branch N-1

- **Project M:** //depot/thirdparty/lib/...
- **Project N:** //depot/thirdparty/lib/tests/...
- **Project branch N-1:**
 - //depot/projectN/...
 - //depot/thirdparty/lib/...
- **Changelist 6789** contains the following files:
 - //depot/thirdparty/lib/tests/checkReturns.sh
 - //depot/projectN/src/index.html
 - //depot/projectN/tests/pageLoadTest.php

The changelist files span all three locations so the changelist is subject to the combined workflow rules for the three locations. The most restrictive workflow is used for the changelist:

	Changelist without a review	Changelist with a review	On update of a review in an end state	Count votes up from	Automatically approve reviews
Project M workflow	Create a review	Reject unless approved	Allow	Anyone	Never
Project N workflow	Reject	Reject unless approved	Reject	Members	Never
Project branch N-1 workflow	Create a review	Allow	Allow	Anyone	Based on vote count
Changelist 6789 workflow	Create a review	Reject unless approved	Allow	Anyone	Never

Tip

It is important to understand that the rules for **Project N** are ignored because **Project branch N-1** is a branch of **Project N** and it has its own workflow rules. This is why the result for **Changelist without a review** is **Create review**, the result for **On update of a review in an end state** is **Allow**, and the result for **Count votes up from** is **Anyone**.

Example 3: Changelist 3456 spans Project X, and Project Y

- **Project X:** //depot/main/product/...
- **Project Y:** //depot/main/product/docs/...
- **Changelist 3456** contains the following files:
 - //depot/main/product/tests/fileSelector.sh
 - //depot/main/product/docs/admin.html

The changelist files span both locations so the changelist is subject to the combined workflow rules for the two locations, and the [global workflow](#) rules set by the administrator. The most restrictive workflow is used for the changelist:

	Changelist without a review	Changelist with a review	On update of a review in an end state	Count votes up from	Automatically approve reviews
Project X workflow	Create a review	Allow	Allow	Anyone	Based on vote count
Project Y workflow	Reject	Allow	Reject	Anyone	Based on vote count
Global workflow rules	Create a review (policy mode)	Reject unless approved (default mode)	Allow (policy mode)	Members (policy mode)	Never (default mode)
Changelist 3456 workflow	Reject	Allow	Reject	Members	Based on vote count

Tip

- Global workflow rules:
 - When a global workflow rule is set to **default** mode, the rule is only used if the project/branch does not have an associated workflow. If the project/branch has an associated workflow, the global rule setting is ignored. This is why the result for the **Changelist with a review** rule is **Allow**, and the **Automatically approve reviews** is **Based on vote count**.
 - When a global workflow rule is set to **policy** mode, the rule is merged with project/branch workflow and the most restrictive rule setting is used. This is why the result for the **Changelist with a review** rule is **Reject**, the result for the **On Update of a review in an end state** rule is **Reject**, and the result for **Count votes up from** is **Members**.

The global workflow rule mode determines how the global rule interacts with the workflow rules. For more information about global rule modes, see "[Workflow basics](#)" on page 341.

- If one or more of the project branches has a moderator, the moderator prevents automatic approval of the review. For more information about moderators, see "[Moderators](#)" on page 291.

Add a workflow

Warning

Workflow is a [technology preview feature](#) and is disabled by default.

Note

- Swarm workflows can be created by any Swarm user.
- Shared Swarm workflows can be viewed by any Swarm user.
- Shared Swarm workflows can be applied to a project or project branch by any Swarm user that is authorized to edit the project.

To add a workflow:

1. On the Swarm **Workflows** page, click the **+ Add Workflow** button.

The **Add Workflow** page is displayed:

Add Workflow
✕

Name

Description

Description

Owners

👤

Individuals:

bruno

✕

Shared with others

No projects use this workflow

Save

Cancel

2. Enter a name for the workflow.
3. **Optional:** provide a description for the workflow.
4. You are automatically added as the owner of the workflow.

Optional: add more owners if required. This field auto-suggests groups, and users within Helix Server as you type (up to a combined limit of 20 entries).

Important

- A workflow must have at least one owner.
- If you remove yourself as an owner, you cannot edit this workflow configuration later unless you have *super* user rights.

5. **Optional:** if you want other Swarm users to be able to use this workflow, select the **Shared with others** checkbox.

Tip

Leave the checkbox unselected until you have proved that the workflow rules work as expected. This keeps the workflow private and stops other Swarm users using the workflow until you are happy with it. Once you are happy with the workflow, select the checkbox to share the workflow with other users.

6. Rules:

On commit without a review:

This rule is applied when a changelist without an associated review is submitted from outside of Swarm.

Select one of the following options:

- **Allow:** the changelist is not checked, the changelist is submitted without a review.
- **Create a review:** the changelist is submitted and a review is created automatically for the changelist.
- **Reject:** the changelist submit is rejected.

Tip

The selected rule is also applied when a changelist is submitted with `#review` in the description. For more information about creating a review by including a keyword in the changelist description, see ["Create a review" on page 406](#).

On commit with a review: This rule is applied when:

- A Swarm review is committed.
- A changelist with an associated review is submitted from outside of Swarm.

Select one of the following options:

- **Allow:** the changelist review state is not checked. The changelist is committed even if its associated review is not approved.
- **Reject unless approved:** the changelist is only submitted if its associated review is approved and the content of the changelist is identical to the content of the approved review.

Tip

The selected rule is also applied when a changelist is submitted with `#review-nnnnn`, `#replace-nnnnn`, or `#append-nnnnn` in the description (**nnnnn** = review ID). For more information about adding a changelist to a review by including a keyword in the changelist description, see ["Add a changelist to a review" on page 406](#).

On update of a review in an end state:

Used to stop review content being changed for reviews that are in specific states. By default, the protected end states are **Archived**, **Rejected**, and **Approve:Commit**. The end states are set by the Swarm administrator, see [end_states](#).

This rule is applied when a changelist is added to a review.

Select one of the following options

- **Allow:** the review is not checked. The changelist is added to the review no matter what the review state is. This is the default setting.
- **Reject:** if the review is in one of the states specified in the `end_state` configurable:
 - The **Add Change** button is disabled for the review.
 - The changelist is rejected if it is added outside of Swarm using `#review-nnnnn`, `#replace-nnnnn`, or `#append-nnnnn` in the description (`nnnnn` = review ID).

Count votes up from:

By default, all of the up votes on a review are counted for the **Minimum up votes** value set on the project/branch the review is associated with. Limit the up votes that are counted to just the members of the project the review is associated with by using this rule.

This rule is applied when a user votes on a review.

Select one of the following options:

- **Anyone:** votes are counted for all reviewers on a review. This is the default setting.
- **Members:** only the up votes of members of the project the review is associated with are counted for the **Minimum up votes** set on projects/branches.

Tip

For instructions on how to set **Minimum up votes** for projects and branches, see [Project minimum up votes](#) and [Branch minimum up votes](#).

Automatically approve reviews:

By default, reviews must be manually approved. Enable automatic approval of reviews with this rule.

This rule is applied when a user votes on a review, a required reviewer is added to a review, or a required reviewer is made an optional reviewer on a review.

Select one of the following options:

- **Never:** reviews are not automatically approved. This is the default setting.
- **Based on vote count:** reviews are automatically approved if:
 - There are no down votes on the review.
 - There are no moderators on the review. If a review has moderators it cannot be automatically approved.
 - All of the [Required reviewers](#) on the review have voted up.
 - The **Minimum up votes** on the review has been satisfied for **each** of the projects and branches the review spans.

Important

Moderators prevent the automatic approval of reviews. For more information about moderators, see "[Moderators](#)" on page 291.

Tip

After a review has been automatically approved it needs to be manually committed.

7. Click **Save**.

Note

The **Save** button is disabled if any required fields are empty.

Edit a workflow

Warning

Workflow is a [technology preview feature](#) and is disabled by default.

Important

Changes made to a workflow will change the workflow for projects and project branches that use that workflow.

Note

A workflow can only be edited by the owner of the workflow or a user with *super* user rights.

1. Visit the **Workflow** page you want to edit.
2. Edit the workflow details as required, see "[Add a workflow](#)" on page 348 for more details.
3. Click **Save**.

Delete a workflow

Warning

Workflow is a [technology preview feature](#) and is disabled by default.

Note

A workflow can only be deleted by the owner of the workflow, or a user with super user rights.

To delete a workflow:

1. Navigate to the workflow you want to delete.
2. Make sure that there are no projects, or branches associated with the workflow.
If projects, or branches are associated with the workflow, the **Delete** button is muted, and the workflow cannot be deleted.
For instructions on how to remove the workflow from a project, or branch, see [Associate a workflow with the project](#) and [Associate a workflow with the project branch](#).
3. Click **Delete** to delete the workflow.

10 | Integrations

Swarm integrates with a variety of other applications and processes to provide important functionality, such as automated testing and deployment of code in reviews, issue tracking, file previewing, and downloading archives. This chapter describes each of the integrations available with Swarm.

Included integrations:

- [JIRA](#)
- [LibreOffice](#)
- [Zip archive](#)
- [Automated Testing for Reviews](#)
- [Automated Deployment for Reviews](#)
- [P4V](#)

JIRA

Swarm's JIRA integration allows code reviews and committed changes to be associated with JIRA issues, making it easy to reference associated issues, and see the state of a code review or committed change within JIRA.

To associate a code review with a JIRA issue, include a JIRA issue identifier in the review's description, for example **SW-1234**. Swarm links to the JIRA issue and creates a link within the JIRA issue back to the code review in Swarm. Multiple JIRA issues can be included in the changelist description.

As a code review progresses, Swarm updates each associated JIRA issue with the review's current status.

Note

Swarm fetches JIRA project identifiers using a worker, once per the worker process' lifetime. See ["Worker configuration" on page 444](#). New JIRA projects will not auto-link to JIRA until the project identifiers have been updated. By default, project identifiers are updated once every ten minutes.

Swarm can also be configured to add a link to a Perforce job within a JIRA issue. Perforce job links are created when a new JIRA or job is created or updated. This gives you direct access to the Perforce job from a link in the **Issue Links** section of the JIRA issue.

By default, JIRA module and Perforce job links are disabled.

See ["Enabling the JIRA module" on the next page](#) and ["Enabling Perforce job links in JIRA issues" on the next page](#) for details on configuring these features.

For a summary of JIRA integration and Perforce job link workflow, see ["JIRA integration and Perforce job link workflow" on page 357](#).

Prerequisites for JIRA integration and job links in JIRA

- The Perforce Defect Tracking Gateway (P4DTG) must be configured for Swarm, JIRA, and P4D, see [Installing and configuring the Helix Defect Tracking Gateway in the *Helix Defect Tracking Gateway Guide*](#).
- The Swarm workers must be working, see ["Worker status" on page 443](#).
- The JIRA module must be enabled, see ["Enabling the JIRA module" below](#).
- To add Perforce job links to JIRA issues, job links must be enabled and the JIRA `job_field` must be set, see ["Enabling Perforce job links in JIRA issues" below](#).

Enabling the JIRA module

When enabled, the JIRA module links JIRA issues referenced in change descriptions, job descriptions, comments, and reviews to your local JIRA service. By default, the JIRA module is not enabled.

To enable the JIRA module, add the following configuration block to your `SWARM_ROOT/data/config.php` file:

```
<?php
    // this block should be a peer of 'p4'
    'jira' => array(
        'host'      => '', // URL for your installed JIRA web interface
        'user'      => '', // the username required for JIRA API access
        'password'  => '', // the password required for JIRA API access
        'job_field' => '', // optional, if P4DTG is replicating JIRA issue IDs
                        // to a job field, list that field here
    ),
```

Note

If your JIRA web interface uses HTTPS, you may need to configure ["HTTP client options" on page 425](#) so that Swarm can connect successfully.

Enabling Perforce job links in JIRA issues

When a Perforce job is created, a link to that job is added to the associated JIRA issue. When P4DTG replication detects a change to an issue, such as description, status, etc. a job link is added to the associated JIRA issue if it does not already exist.

Important

If Swarm fails to add a Perforce job link to a JIRA issue because that JIRA issue does not exist, the

failure is logged by Swarm. Swarm will not try to add the job link to that JIRA issue again.

Note

If a Perforce job is updated and the `DTG_DTISSUE` field value is changed, a job link will be added to the new JIRA issue. The Perforce job link will not be removed from the original JIRA issue.

Prerequisites for Perforce job links in JIRA issues:

- The JIRA module must be enabled
- The JIRA `job_field` must be set
- P4DTG must be configured

To enable Perforce job links in JIRA issues, add the following configuration block to your `SWARM_ROOT/data/config.php` file:

```
<?php
    // this block should be a peer of 'p4'
    'jira' => array(
        'host'      => '', // URL for your installed JIRA web interface
        'user'      => '', // the username required for JIRA API access
        'password'  => '', // the password required for JIRA API access
        'job_field' => '', // optional, if P4DTG is replicating JIRA issue IDs
                        // to a job field, list that field here
        'link_to_jobs' => false, // set to true to enable Perforce
job links in JIRA, P4DTG and job_field required
        'delay_job_links' => 60, // delay in seconds, defaults to
60 seconds
    ),
```

`link_to_jobs`:

- `false`: disable Perforce job links in JIRA. The default setting is `false`.
- `true`: enable Perforce job links in JIRA.

`delay_job_links`: delay set in seconds. Sets the delay between a new JIRA or job being created or updated, and Swarm adding the job link to the JIRA issue. This configurable is used to avoid a race condition between JIRA and the Helix Server. By default `delay_job_links` is set to 60 seconds, if a race condition is experienced increase the delay time.

JIRA integration and Perforce job link workflow

This section describes the workflow for JIRA integration and job links in JIRA issues when you request a new Swarm review from P4V.

Tip

The process for adding a Perforce job and creating a review differs for the other clients but the Swarm worker and Perforce Defect Tracking Gateway (P4DTG) workflow is the same.

1. Create a new JIRA issue in your JIRA system.
2. P4DTG detects the new JIRA issue and creates a new Perforce job for that JIRA issue.
3. Add the new Perforce job to a pending changelist in P4V, see [Add a job to a pending changelist](#) in the *P4V User Guide*.
4. Request a new Swarm review for the pending changelist in P4V, see [Request a review](#) in the *P4V User Guide*.
5. P4V passes the review request to the Swarm worker queue.
6. The review request is processed by the next available Swarm worker, the new review is created.
7. Swarm checks its JIRA configuration. If the `job_field` exists in the Perforce job, Swarm adds a link to the new Perforce job in the **Issue Links** section of the JIRA issue.

To check that these steps have been completed and to view the links:


1. Open the new Swarm review, the associated Perforce jobs are displayed on the review page below the review description.
2. Click the Perforce job link to open the job.
3. The Swarm review link is displayed on the job page below the job description.
4. Click the **Details** tab on the Perforce job page to view the **DTG_DTISSUE** field.
5. Click the JIRA link in the **DTG_DTISSUE** field to view the JIRA issue.
6. The Swarm review and Perforce job links are displayed in the **Issue Links** section of the JIRA issue page.

LibreOffice

LibreOffice is a free power-packed open source personal productivity suite. When LibreOffice is installed on the server hosting Swarm, Swarm automatically detects its presence and uses LibreOffice to prepare PDF previews of a variety of file types, including:

- Word documents (`.doc`, `.docx`)
- PowerPoint presentations (`.ppt`, `.pptx`)
- Excel spreadsheets (`.xls`, `.xlsx`)

- Visio diagrams (. **v**s**d**)
- Rich-text files (. **r**t**f**).

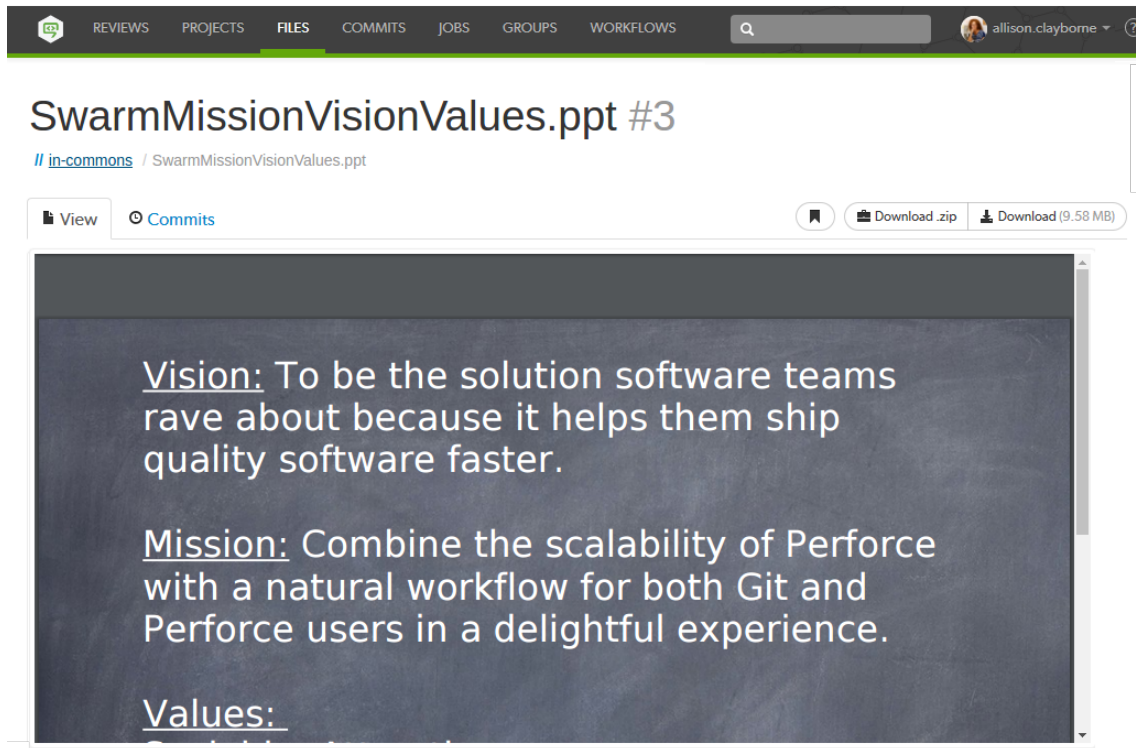

Depending on your server's platform and distribution, LibreOffice may be provided as multiple packages and not all packages may be installed by default. If certain filetypes do not preview as expected in Swarm, you may need to install these optional packages to include all of the file handling capabilities of LibreOffice.

For more information on LibreOffice, see <https://www.libreoffice.org>.

Limitations

The LibreOffice integration has several limitations:

- Document previews in Swarm may appear different than on a desktop system if the document's fonts are not installed on the server hosting Swarm and LibreOffice. In addition, LibreOffice has some limitations rendering Microsoft Office file types, so LibreOffice-generated previews may differ from what you see using Microsoft Office.
- Large files may require a notable amount of time to preview. Very large files may exhaust the resources of the server hosting Swarm, causing the preview to fail and temporarily impacting Swarm performance.
- Swarm is currently not able to detect or show differences in LibreOffice-supported file types.
- LibreOffice cannot currently provide previews on a Mac OSX server hosting Swarm.

Installation

We recommend that you install LibreOffice from your OS distribution, via `apt-get`, `yum`, etc.

The minimal packages, and their transitive dependencies required for Swarm are:

- `libreoffice-calc`
- `libreoffice-draw`
- `libreoffice-impress`
- `libreoffice-writer`
- `libreoffice-headless` (CentOS/RHEL only)

Zip archive

When the `zip` command-line tool is installed on the Swarm server, Swarm allows users to download ZIP archives of files and folders. You can download a Zip archive using the **Download .zip** button from the following Swarm pages:

- "Review display" on page 262 page.
- "Changelists" on page 188 page.
- "Files" on page 175 page.

Installation

Install the zip command-line tool from your operating system distribution using `apt-get`, `yum`, etc.

Configuration

Configure the archiving feature with the following configuration block in the `SWARM_ROOT/data/config.php` file:

```
<?php
// this block should be a peer of 'p4'
'archives' => array(
    'max_input_size'    => 512 * 1024 * 1024, // 512M (in bytes)
    'archive_timeout'  => 1800,              // 30 minutes
    'compression_level' => 1,                // 0-9
    'cache_lifetime'   => 60 * 60 * 24,     // 1 day
),
```

The `max_input_size` key specifies the maximum file/folder content size that can be processed into a ZIP archive. The default value permits up to 512 megabytes of content to be compressed. Smaller values limit the amount of file/folder content but provide faster downloads; larger values can allow increased scanning, syncing, compressing, and downloading times.

The `archive_timeout` key specifies the amount of time, in seconds, to allow Swarm to prepare the ZIP archive for downloading. Shorter times can limit the practical size of a ZIP archive, depending on the performance of your network and the filesystem hosting Swarm; even with a generous `max_input_size` setting, if `archive_timeout` seconds have elapsed, the archive operation is terminated.

The `compression_level` key specifies the compression level to use, and must be within the range 0 to 9. 0 means no compression, 9 means maximum compression. As this value is increased, smaller ZIP archives may result, but may require greater compression time. Swarm uses the default of 1, which provides a reasonable tradeoff of fast compression times with light compression that can still result in an archive notably smaller than the original file/folder content.

The `cache_lifetime` key specifies the desired maximum age of cached ZIP archives. Increasing the value increases the amount of time that ZIP archives exist in the cache, which can improve the user experience for frequently downloaded files. However, ZIP archives can be quite large (depending on the size of your depot within the Helix Server) and can require significant disk storage. Decreasing the value can mitigate the amount of disk space required for the cache; the tradeoff is that frequently accessed ZIP archives may need to be generated more frequently, which can have an impact on CPU and disk resources.

Download files as a Zip archive

To download the zip archive navigate to the review, changelist, file or folder:

Important

Files **Marked for Add** in pre-commit reviews and shelved changelists are not included in the zip file.

Note

The **Download .zip** button is not displayed if the zip command-line tool is not installed on the Swarm server. For information about installing, and configuring the zip command-line tool, see ["Zip archive" on the previous page](#).

When you click the **Download .zip** button, Swarm performs the following steps:

1. Scans the files/folders:
 - Checks that you have permission to access their contents, according to the Helix Core Server protections.
 - Checks that the total file size is small enough to be processed by Swarm.
2. Syncs the file contents to the Swarm server from the Helix Core Server.

3. Creates the ZIP archive by compressing the file content.
4. Starts a download of the generated ZIP archive.

Note

- You might not see all of the above steps; Swarm caches the resulting ZIP archives so that repeated requests to the same files/folders can skip the sync and compress steps whenever possible.
- If an error occurs while scanning, syncing, or compressing, Swarm indicates the error.

11 | Administration

This section covers administration and configuration of Swarm.

Avatars	363
Backups	364
Changelist files limit	365
Client integration	365
Comment attachments	366
Comment mentions	368
Comments	368
Commit credit	370
Commit-edge deployment	370
Commit timeout	371
Configuration overview	371
Diff configuration	379
Email configuration	379
Emoji	384
Environment	384
Excluding Users from Activity Streams	386
Files configuration	387
Groups configuration	387
Ignored users for reviews	388
License	388
Locale	388
Logging	389
Mainline branch identification	392
Notifications	393
OVA Management	398
P4TRUST	399
Projects	399
Review cleanup	402
Review keyword	404
Reviews filter	409
Reviews	410
Obliterate Review	417
Search	418
Security	419
Short links	429
swarm_root	430
System Information	430
Trigger options	432
Unapprove modified reviews	438
Uninstall Swarm	438
Upgrade index	440
Users	441
Workers	443
Workflow global rules - Technology preview feature	445

Avatars

Swarm uses *avatars*, images that represent users and groups responsible for events in activity streams, projects, reviews, etc.

Avatars are retrieved from an avatar provider; the default provider is [gravatar.com](http://www.gravatar.com). Swarm sends an identifier to the avatar provider (for [gravatar.com](http://www.gravatar.com), an MD5 hash of the user's or group's email address), and the provider returns the configured image (if one exists). If no avatar is defined with the provider or the requests fails for any reason, Swarm selects an avatar from its internal collection.

You configure the avatar lookups with the avatars configuration block in the `SWARM_ROOT/data/config.php` file. Here is an example:

```
<?php
    // this block should be a peer of 'p4'
    'avatars' => array(
        'http_url' => 'http://www.gravatar.com/avatar/{hash}?s={size}&d={default}',
        'https_url' => 'https://secure.gravatar.com/avatar/{hash}?s={size}&d={default}',
    ),
```

Both `http_url` and `https_url` specify URLs that should be used instead of the default [gravatar.com](http://www.gravatar.com) URLs. Swarm picks which URL to use based on the current request; for HTTPS requests, Swarm picks the `https_url` URL. If the picked URL is not defined, Swarm will use [gravatar.com](http://www.gravatar.com).

Several replacement values are available for inclusion in the URLs:

- **{user}**
The current Swarm userid, Perforce groupid, or empty string
- **{email}**
The current Swarm user's or group's email address, or empty string
- **{hash}**
The MD5 hash of the Swarm user's or group's email address, or 00000000000000000000000000000000 if no email address is configured
- **{default}**
The value blank for a transparent GIF (allowing users or groups without avatars to fallback to Swarm's internal avatars) or the value `mm` for a *mystery man* used in circumstances where no user or group identifier is known
- **{size}**
the size Swarm would like in pixels for both the width and height, without units, e.g. 64

The URL you specify must include one of `{user}`, `{email}`, or `{hash}` to properly select a user-specific or group-specific avatar. The URL should include `{size}` to assist Swarm's presentation. `{default}` is not necessary, but helps provide a consistent avatar experience.

Note

By default, `gravatar.com` serves only G-rated avatar images. If your Swarm users and groups wish to use PG-, R-, or X-rated images, you need to configure the avatar lookup URLs with the appropriate rating flag. For example, to allow avatars with G or PG ratings, the configuration would look like:

```
<?php
    // this block should be a peer of 'p4'
    'avatars' => array(
        'http_url' => 'http://www.gravatar.com/avatar/{hash}?r=pg&s={size}&d={default}',
        'https_url' => 'https://secure.gravatar.com/avatar/{hash}?r=pg&s={size}&d={default}',
    ),
```

For more information on `gravatar.com` image requests, see: <https://en.gravatar.com/site/implement/images>

Disable avatar lookups

If you wish to disable avatar lookups altogether and simply use Swarm's internal avatars, set each URL to `' '` (empty string). For example:

```
<?php
    // this block should be a peer of 'p4'
    'avatars' => array(
        'http_url' => '',
        'https_url' => '',
    ),
```

Backups

Swarm stores all of the information it requires to operate within the Helix Server. This includes project definitions, code reviews, comments, followers, and more. Code reviews are largely built on top of Helix Server's shelving feature, and most other records are stored in custom counters called *keys*.

Therefore, the standard recommendations for backing up your Helix Server also apply when backing up your Swarm data.

For more information about backup and recovery, see [Backup and recovery in *Helix Core Server Administrator Guide: Fundamentals*](#).

In addition, your Swarm configuration and any modifications you might make to the provided modules, templates, CSS, JavaScript, etc. also need to be backed up. The `SWARM_ROOT/data` directory contains the configuration, as well as temporary working files and browser session storage.

Changelist files limit

Changelists or reviews with many files present a challenge to Swarm; it can take a notable amount of time for the file listing to reach Swarm from the Helix Server, and a notable amount of time to provide the file listing HTML to a user's browser. When the file listing is many thousands of files, Swarm may run out of memory. Increasing the amount of memory for Swarm can help, but the Swarm interface may work slowly or not at all depending on the amount of memory available to the user's browser.

With the 2015.1 release, Swarm limits the number of files presented, even if a changelist or review involves more files than the limit.

You can adjust the limit to suit your needs, by specifying a value for `max_changelist_files` in the `SWARM_ROOT/data/config.php` file:

```
<?php
    'p4' => array(
        'max_changelist_files' => 1000,
    ),
```

The default value of `1000` should suffice for most Swarm installations. Consider the effects of changing this value:

- Problems in the Swarm UI still exist with arbitrarily large values; there is likely no advantage to using a value over `10000`.
Performance will be better with Helix Server 2014.1 or later, as the file listing will be limited by Helix Server.
- Smaller values can potentially interfere with reviews and reading changelists; the file limit may cause interesting files in a changelist or review to no longer be displayed in Swarm.

Client integration

P4V and P4VS can now integrate with Swarm. To indicate how these applications should connect with Swarm, Swarm sets the `P4.Swarm.URL` property set in Helix Server. P4V and P4VS read this property, and if set, they connect to the specified URL to make Swarm API calls. If the property is unset, Swarm integration features are disabled.

When `P4.Swarm.URL` is set, P4V provides the following integration features:

- **Request a review:** requests a review for pending or committed changelists.
- **Update a review:** updates a review from the current state of a pending changelist. This works for changelists that are already associated with a review, or for unassociated changelists.
- **Open review in Swarm:** opens the review associated with the selected changelist in your system's default web browser.
- **Review Id and State columns:** adds **Review Id** and **Review State** columns to both the **Pending** and **Submitted** tabs.

By default, the first Swarm worker auto-detects the URL it is running under and sets `P4.Swarm.URL` accordingly.

For customized Swarm installations, the auto-detected URL may not use the correct hostname or port. In these scenarios, you can disable the URL auto-detection by editing the `SWARM_ROOT/data/config.php` file and setting the `auto_register_url` item to `false` in the `p4` configuration block. For example:

```
<?php
    'p4' => array(
        'auto_register_url' => false,
    ),
```

If you choose to disable this feature, you should manually set the `P4.Swarm.URL` property in Helix Server to the URL for your Swarm installation:

```
$ p4 property -a -n P4.Swarm.URL -v https://myswarm.url:port/
```

Replace `https://myswarm.url:port/` with the URL for your Swarm installation.

Note

P4V uses an integration timeout, specified in the `P4.Swarm.Timeout` property, to limit delays in the P4V user interface. The default timeout is 10 seconds.

To change the integration timeout, run:

```
$ p4 property -a -n P4.Swarm.Timeout -v 10
```

Replace the `10` with the desired timeout in seconds. Increasing the timeout could cause notable delays in the P4V user interface, and decreasing the timeout could cause sporadic integration failures if Swarm's API responses take longer than the specified timeout.

Comment attachments

Swarm supports attaching arbitrary files to comments in code reviews and jobs.

To store files attached to comments, Swarm looks for a depot named `// .swarm`. As Swarm does not create this depot, you need to create it, or specify another depot that the Swarm `admin` user can write to.

To create a `// .swarm` depot, run the following as a user with `admin`-level privileges:

```
$ p4 depot .swarm
```

Ensure that the Swarm *admin* user can write to the `// .swarm` depot.

For information on creating depots, see [Working with depots](#) in *Helix Core Server Administrator Guide: Fundamentals*.

Specifying a depot path for comment attachments, if you prefer not to use the default `// .swarm` depot, is done with the `depot_storage` configuration block in the `SWARM_ROOT/data/config.php` file:

```
<?php
    // this block should be a peer of 'p4'
    'depot_storage' => array(
        'base_path' => '//depot_name',
    ),
```

Replace `depot_name` with the depot where comment attachments should be stored. The Swarm *admin* needs to be able to write to this depot.

You can limit the size of comment attachments with the `attachments` configuration block in the `SWARM_ROOT/data/config.php` file:

```
<?php
    // this block should be a peer of 'p4'
    'attachments' => array(
        'max_file_size' => 0, // the maximum file size to accept in bytes
    ),
```

Replace the `0` with the maximum file size in bytes that you want Swarm to accept for a comment attachment. If the file size is exceeded, users will see an error.

Note

Be aware that PHP's `upload_max_filesize` setting in `SWARM_ROOT/public/.htaccess` overrides `max_file_size` (which overrides the setting in PHP's `php.ini`). You can only use `max_file_size` to be more restrictive than the setting in `SWARM_ROOT/public/.htaccess`.

The default for `upload_max_filesize` is 8M (8 megabytes). Increase this limit if your commenters need to upload larger files.

You may also have to increase `post_max_size`. `post_max_size` should always be set larger or equal to `upload_max_filesize`, and Swarm's `max_file_size` should always be either unset, or set smaller or equal to `upload_max_filesize`, otherwise users will encounter unexpected rejection of their comment attachments.

See [Handling file uploads: Common Pitfalls](#) for more details.

Comment mentions

Since 2017.1, it is possible to use @mentions in review comments. By default, @mentions will auto-complete to all users in the system, but it is possible to fine tune this behaviour.

You configure the behaviour of @mentions in comments with the mentions configuration block in the `SWARM_ROOT/data/config.php` file. Here is an example:

```
<?php
    'mentions' => array(
        'mode' => 'global',
        'usersBlacklist' => array('super', 'swarm-admin'),
    ),
```

■ mode

This can be one of `global`, `projects` or `disabled`, and controls the scope of the auto-complete dropdown that is shown when the user starts typing an @mention in a comment. `global` will display all users in the system, `projects` will only display project members in the auto-complete list, and `disabled` means that no auto-complete drop down will be shown.

■ usersBlacklist

Any users listed here will never appear in the drop down list of auto-suggested users when @mentions are used.

Comments

This section provides information on how to delay comment notifications, and configure comment threading.

Comment notification delay

By default, comment notifications are delayed to allow reviewers to add or edit comments as they progress through a review without sending a notification for each individual comment on the review. Comment notifications are rolled up into a single notification and sent either manually by the reviewer, or automatically after the notification delay time has been exceeded.

The delay countdown is reset each time the reviewer adds or edits a comment on the review, by default the notification delay time is set to 30 minutes.

- If you are commenting on more than one review, each of the reviews that you are commenting on has its own notification delay countdown that only applies to the comments that *you* make on *that* review.
- If another reviewer is making comments on the same review as you, *that* reviewer has their own notification delay timer for *that* review.

- If you manually send a delayed comment notification, the notification will only contain the comments that *you* made on *that* review.

Tip

The comment notification delay does not delay the posting of the comments, only the comment notification is delayed.

Note

Comment notifications are only delayed for comments on reviews. Comments on commits or jobs produce notifications immediately.

To change the comment notification delay time, update the `SWARM_ROOT/data/config.php` file to include the following configuration item within the reviews block:

```
<?php
    'comments' => array(
        'notification_delay_time' => 1800, //Default to 30 minutes 1800
seconds
    ),
```

notification_delay_time: Specifies the comment notification delay time in seconds.

- Set to **0** to send the comment notification immediately the **Post** button is clicked.
- The default value if **notification_delay_time** is not specified is **1800** seconds (30 minutes).

Comment threading

By default, you can reply to comments, replies are displayed in a thread below the parent comment. Comment thread depth is set to 4 by default, this means you can have up to 4 levels of replies for a parent comment. The **Reply** link is not displayed for replies at or above the maximum thread depth set for Swarm. If the parent comment is archived, replies are archived with the parent, see "[Archiving comments](#)" on page 210. Comment threading depth is set by the **max_depth** configurable.

Tip

If the thread depth is reduced by a Swarm administrator, earlier replies at a deeper level will continue to be displayed but you cannot reply to them.

To configure comment threading, update the `SWARM_ROOT/data/config.php` file to include the following configuration item within the reviews block:

```
<?php
    'comments' => array(
        'threading' => array(
```

```
        'max_depth' => 4, // default depth 4, to disable comment
threading set to 0
    ),
),
```

max_depth: Specifies maximum depth of a comment thread.

- Set to **0** to disable comment threading.
- The default value if **max_depth** is not specified is **4**.

Commit credit

When you use Swarm to commit a review, but you are not the review's author, Swarm gives credit to the review author by default. Activity stream entries and email notifications include both the committer and review author's details.

If you prefer Swarm's original behavior, which was to give credit only to the committer, you can do so by editing the `SWARM_ROOT/data/config.php` file and setting the `commit_credit_author` item to **false** in the `reviews` configuration block. For example:

```
<?php
// this block should be a peer of 'p4'
'reviews' => array(
    'commit_credit_author' => false,
),
```

Commit-edge deployment

Swarm can connect to a Helix Core Server configured to use the *commit-edge architecture*, which is a specific replication configuration that employs a *commit* server and one or more *edge* servers. This configuration distributes the compute, storage, and network requirements for improved performance and geographic distribution.

When Swarm is connected to a commit server, the first worker detects this situation and sets a key in the Helix Server, `P4.Swarm.CommitURL`, to an auto-detected URL. This allows any other Swarm instances that may be connected to edge servers to share reviews amongst all edge servers.

For more information on Helix Server's commit-edge architecture, see the [Commit-edge](#) in the *Helix Core Server Administrator Guide: Multi-Site Deployment*.

P4V Authentication

When using P4V's Swarm integration in a commit-edge deployment, users may encounter authentication errors; such errors can result from incorrect configuration of login tickets in distributed environments. Essentially, the problem is that while P4V is connected to an edge server, Swarm is connected to the commit server, and the login tickets do not match.

If P4V users see the **error Host requires authentication**, the solution we recommend is to forward login requests to the commit server. This can be achieved by executing the following two commands as a user with *operator* or *super* privileges in the Helix Server:

```
$p4 configure set auth.id=authid
$p4 configure set rpl.forward.login=1
```

Replace `authid` with the authentication identifier for your Helix Server.

For more information, see our Knowledge Base article [Single Ticket Login in Distributed Environments](#), and the `p4 serverid` command in the [P4 Command Reference](#).

Commit timeout

When a code review contains many files, or large files, or both, committing the review within Swarm can take some time. The default configuration, within the `SWARM_ROOT/data/config.php` file:

```
<?php
// this block should be a peer of 'p4'
'reviews' => array(
    'commit_timeout' => 1800, // 30 minutes
),
```

The `commit_timeout` key is expressed in seconds. If a commit operation takes longer than this limit, it is terminated. It is likely that a terminated commit requires administrator intervention to complete the commit using another client.

Configuration overview

This section provides an overview of all the possible configuration blocks in the `SWARM_ROOT/data/config.php` file. Click on any link in the configuration overview below to see a detailed description of that configurable.

Warning

While the syntax of this example is correct, it includes configuration values that **cannot work**. Ensure that you adjust the configuration appropriately for your Swarm installation before using this example in testing or production.

```
<?php
return array(
```

```

    'activity' => array(
        'ignored_users' => array(
            'git-fusion-user',
            'p4dtguser',
            'system',
        ),
    ),
    'archives' => array(
        'max_input_size'    => 512 * 1024 * 1024, // 512M (in bytes)
        'archive_timeout'  => 1800,             // 30 minutes
        'compression_level' => 1,              // 0-9
        'cache_lifetime'   => 60 * 60 * 24,    // 1 day
    ),
    'attachments' => array(
        'max_file_size' => 0, // the maximum file size to accept in
bytes
    ),
    'avatars' => array(
        'http_url' => 'http://www.gravatar.com/avatar/{hash}?s=
{size}&d={default}',
        'https_url' => 'https://secure.gravatar.com/avatar/{hash}?s=
{size}&d={default}',
    ),
    'comments' => array(
        'notification_delay_time' => 1800, //Default to 30 minutes
1800 seconds
        'threading' => array(
            'max_depth' => 4, // default depth 4, to disable comment
threading set to 0
        ),
    ),
    'depot_storage' => array(
        'base_path' => '//depot_name',
    ),
    'diffs' => array(
        'max_diffs' => 1500,

```



```
),
  'environment' => array(
    'mode'          => 'production',
    'hostname'      => 'myswarm.hostname',
    'external_url'  => null,
    'base_url'      => null,
  ),
  'files' => array(
    'max_size'      => 1048576,
    'download_timeout' => 1800,
  ),
  'groups' => array(
    'super_only'   => true,
  ),
  'http_client_options' => array(
    'timeout'      => 5,
    'hosts'        => array(),
  ),
  'jira' => array(
    'host'         => '',
    'user'         => '',
    'password'     => '',
    'job_field'    => '',
    'link_to_jobs' => false, // set to true to enable Perforce job
links in JIRA, P4DTG and job_field required
    'delay_job_links' => 60, // delay in seconds, defaults to 60
seconds
  ),
  'log' => array(
    'priority'     => 5,
  ),
  'mail' => array(
    // 'recipients' => array('user@my.domain'),
    'notify_self'  => false,
    'transport'    => array(
      'host' => 'my.mx.host',
```

```

    ),
  ),
  'mentions' => array(
    'mode' => 'global',
    'usersBlacklist' => array('super', 'swarm-admin'),
  ),
  'notifications' => array(
    'honor_p4_reviews' => false,
    'opt_in_review_path' => '//depot/swarm',
    'disable_change_emails' => false,
  ),
  'p4' => array(
    'port' => 'my-helix-core-server:1666',
    'user' => 'admin_userid',
    'password' => 'admin user ticket or password',
    'slow_command_logging' => array(
      3,
      10 => array('print', 'shelve', 'submit', 'sync',
'unshelve'),
    ),
    'max_changelist_files' => 1000,
    'auto_register_url' => true,
  ),
  'projects' => array(
    'mainlines' => array(
      'main', 'mainline', 'master', 'trunk',
    ),
    'add_admin_only' => false,
    'add_groups_only' => array(),
    'edit_name_admin_only' => false,
    'edit_branches_admin_only' => false,
    'readme_mode' => 'restricted',
    'fetch' => array('maximum' => 0), //
defaults to 0 (disabled)
  ),
  'queue' => array(

```

```

        'workers'           => 3,      // defaults to 3
        'worker_lifetime'   => 595,   // defaults to 10 minutes (less
5 seconds)
        'worker_task_timeout' => 1800, // defaults to 30 minutes
        'worker_memory_limit' => '1G', // defaults to 1 gigabyte
    ),
    'reviews' => array(
        'patterns' => array(
            'octothorpe' => array(      // #review or #review-1234 with
surrounding whitespace/eol
                'regex'  => '/(?:P<pre>(?:\s|^)\(?\)\#
(?:P<keyword>review|append|replace) (?:- (?:P<id>[0-9]+)) ?(?:P<post>[.,!?:;]) *
(?:=\s|$))/i',
                'spec'   => '%pre%#%keyword%-%id%%post%',
                'insert' => "%description%\n\n#review-%id%",
                'strip'  => '/^\s*\#(review|append|replace) (-[0-9]+)?
(\s+|$) | (\s+|^)\#(review|append|replace) (-[0-9]+)?\s*$/i',
            ),
            'leading-square' => array(   // [review] or [review-
1234] at start
                'regex'  => '/^(?:P<pre>\s*)\
[ (?:P<keyword>review|append|replace) (?:- (?:P<id>[0-9]+)) ?\] (?:P<post>\s*)/i',
                'spec'   => '%pre%[%keyword%-%id%]%post%',
            ),
            'trailing-square' => array(  // [review] or [review-
1234] at end
                'regex'  => '/(?:P<pre>\s*)\
[ (?:P<keyword>review|append|replace) (?:- (?:P<id>[0-9]+)) ?\]
(?:P<post>\s*)?$/i',
                'spec'   => '%pre%[%keyword%-%id%]%post%',
            ),
        ),
    'filters' => array(
        'result_sorting' => true,
        'date_field' => 'updated', // 'created' displays and sorts by

```

```

created date, 'updated' displays and sorts by last updated
    ),
  ),
  'commit timeout'           => 1800, // 30 minutes
  'disable commit'         => true,
  'moderator approval'     => 'any', // 'any|each'
  'disable self approve'    => false,
  'end states'             => array('archived',
'rejected', 'approved:commit'),
  'disable approve when tasks open' => false,
  'process shelf delete when'     => array(),
  'commit credit author'        => true,
  'ignored users'              => array(),
  'unapprove modified'          => true,
  'allow author change'         => true,
  'allow author obliterate'     => false,
  'sync descriptions'          => true,
  'expand all file limit'       => 10,
  'expand group reviewers'     => false,
  'disable tests on approve commit' => false,
  'more context lines'         =>10, // defaults to 10
lines
  ),
  'search' => array(
    'maxlocktime'      => 5000, // 5 seconds, in milliseconds
    'p4_search_host'  => '',    // optional URL to Helix Search
Tool
  ),
  'security' => array(
    'disable system info'      => false,
    'email restricted changes' => false,
    'emulate ip protections'  => true,
    'https port'               => null,
    'https strict'             => false,
    'https strict redirect'   => true,
    'prevent login'           => array(),

```

```

        'require_login' => true,
    ),
    'session' => array(
        'cookie_lifetime' => 0, // 0=expire when browser
closed
        'remembered_cookie_lifetime' => 60*60*24*30, // 30 days
        'gc_maxlifetime' => 60*60*24*30, // 30 days
        'gc_divisor' => 100, // 100 user requests
    ),
    'short_links' => array(
        'hostname' => 'myho.st',
        'external_url' => 'https://myho.st:port/sub-folder',
    ),
    'upgrade' => array(
        'status_refresh_interval' => 10, //Refresh page every 10
seconds
        'batch_size' => 1000, //Fetch 1000 reviews to lower memory
usage
    ),
    'users' => array(
        'settings' => array(
            'review_preferences' => array(
                'show_comments_in_files' => true,
                'view_diffs_side_by_side' => true,
                'show_space_and_new_line_characters' => false,
                'ignore_whitespace' => false,
            ),
            'time_preferences' => array(
                'display' => 'Timeago', // Default to 'Timeago' but can
be set to 'Timestamp'
            ),
        ),
    ),
    'workflow' => array(
        'enabled' => false, // Switches the workflow feature on.
Workflow is a technology preview feature, it is currently unsupported and

```

```

not suitable for production. Default is false
    ),
    'workflow_rules' => array(
        'on_submit' => array(
            'with_review' => array(
                'rule' => 'no_checking', // 'no_checking|strict'
                'mode' => 'default' // 'policy|default'
            ),
            'without_review' => array(
                'rule' => 'no_checking', // 'no_checking|auto_
create|reject'
                'mode' => 'default' // 'policy|default'
            ),
        ),
    ),
    'end_rules' => array(
        'update' => array(
            'rule' => 'no_checking', // 'no_checking|no_revision'
            'mode' => 'default' // 'policy|default'
        ),
    ),
    'counted_votes' => array(
        'rule' => 'anyone', // 'anyone|members'
        'mode' => 'default' // 'policy|default'
    ),
    'auto_approve' => array(
        'rule' => 'never', // 'never|votes'
        'mode' => 'default' // 'policy|default'
    ),
),
'xhprof' => array(
    'slow_time' => 3,
    'ignored_routes' => array('download', 'imagick',
'libreoffice', 'worker'),
),
);

```

Note

The Swarm configuration file does not include PHP's standard closing tag (`?>`). This is intentional as it prevents unintentional whitespace from being introduced into Swarm's output, which would interfere with Swarm's ability to control HTTP headers. Debugging problems that result from unintentional whitespace can be challenging, since the resulting behavior and error messages often appear to be misleading.

Diff configuration

Swarm's [Diffs](#) feature can be customized via the following config item.

max_diffs

If the number of diffs is greater than the configured maximum, then the list of diffs is truncated by default. An option will be given to show all the diffs for that file.

```
'diffs' => array(
    'max diffs' => 1500,
),
```

Email configuration

Swarm's email delivery is controlled by the mail configuration block in the [SWARM_ROOT/data/config.php](#) file. Here is an example:

```
<?php
    // this block should be a peer of 'p4'
    'mail' => array(
        // 'sender' => 'swarm@my.domain', // defaults to
'notifications@hostname'
        'transport' => array(
            'name' => 'localhost', // name of SMTP host
            'host' => '127.0.0.1', // host/IP of SMTP host
            'port' => 587, // SMTP host listening port
            'connection_class' => 'plain', // 'smtp', 'plain', 'login',
'crammd5'
            'connection_config' => array( // include when auth required
to send
                'username' => 'user', // user on SMTP host
                'password' => 'pass', // password for user on SMTP
```

```
host
    'ssl'      => 'tls',      // empty, 'tls', or 'ssl'
    ),

    // override email deliveries and store all messages in this
path
    // 'path' => '/var/spool/swarm',
    ),

    // override regular recipients; send email only to these addresses
    // 'recipients' => array(
    //     'user1@my.domain',
    //     'user2@my.domain',
    // ),

    // send notifications of comments to comment authors?
    'notify_self' => false,

    // blind carbon-copy recipients
    // 'use_bcc' => true,

    // suppress reply-to header
    // 'use_replyto' => false,
),
```

Note

Without any mail configuration in the `SWARM_ROOT/data/config.php` file, Swarm attempts to send email according to PHP's configuration, found in the `php.ini` file. By default, the configuration in `php.ini` relies on SendMail being installed.

Important

Email delivery for events related to restricted changes is disabled by default. See "[Restricted Changes](#)" on page 422 for details on how to enable restricted change notifications.

Sender

The sender item within the `mail` block specifies the sender email address that should be used for all notification email messages. The default value is:

```
notifications@hostname
```

`hostname` is the name of the host running Swarm, or when specified with the "Environment" on [page 384](#) configuration.

Transport

The `transport` block within the `mail` block defines which mail server Swarm should use to send email notifications. Most of the items in this block can be omitted, or included as needed. See the Zend Framework's [Mail Transport Configuration Options](#) for a description of most fields and their default values.

Swarm uses the custom path item to direct all email messages to a directory instead of attempting delivery via SMTP. For details, see ["Save all messages to disk" on the facing page](#).

Recipients

The `recipients` item within the `mail` block allows you to specify a list of recipients that should receive email notifications, overriding the normal recipients. This is useful if you need to debug mail deliveries.

```
<?php
    // this block should be a peer of 'p4'
    'mail' => array(
        'recipients' => array(
            'user1@my.domain',
            'user2@my.domain',
        ),
    ),
```

Any number of recipients can be defined. If the array is empty, email notifications are delivered to the original recipients.

notify_self

The `notify_self` item within the `mail` block specifies whether comment authors should receive an email for their comments. The default value is `false`. When set to `true`, comment authors receive an email notification for their own comments.

Use BCC

The `use_bcc` item within the `mail` block allows you to address recipients using the Bcc email field. Setting the value to `true` causes Swarm to use the `Bcc:` field in notifications instead of the `To:` field, concealing the email addresses of all recipients.

```
<?php
    // this block should be a peer of 'p4'
    'mail' => array(
        'use_bcc' => true,
    ),
```

Use Reply-To

The `use_replyto` item within the `mail` block allows you to suppress populating the Reply-To email field. Setting the value to `false` causes Swarm to omit the `Reply-To:` field in notifications; by default, it is populated with the author's name and email address. When this field is `true`, users receiving an email notification can simply reply to the email and their response will be addressed to the author.

```
<?php
    // this block should be a peer of 'p4'
    'mail' => array(
        'use_replyto' => false,
    ),
```

Save all messages to disk

For testing purposes, you may want to send all email to disk without attempting to send it to recipients. Use the following configuration block to accomplish this:

```
<?php
    // this block should be a peer of 'p4'
    'mail' => array(
        'transport' => array('path' => MAIL_PATH),
    ),
```

`<MAIL_PATH>` should be replaced with the absolute path where email messages should be written, the mail transport will create a new file for each email message and write it to the path directory. This path must already exist and be writable by the web server user.

Note

Use of the path item causes Swarm to ignore **all** other configuration within the transport block. This is why path is commented out in the main example.

Email headers

Swarm sends out notification emails that contain custom headers which email programs can use for automatic filtering. Emails also contain headers to ensure they are correctly threaded in email clients which support doing so.

All Swarm emails contain the following headers, which can be used to identify which Swarm server they came from:

```
X-Swarm-Host: swarm.perforce.com
X-Swarm-Version: SWARM/2017.1/1500036 (2017/03/27)
```

The exact values may differ according to the version of Swarm you are running, and its configuration.

If a notification is applicable to one or more projects, then each project will be listed in the **X-Swarm-Project** header, which contains a list of one or more project names. Reviews may span multiple projects, so in this case a single email is sent out with each project listed.

```
X-Swarm-Project: gemini, apollo
X-Swarm-Host: swarm.perforce.com
X-Swarm-Version: SWARM/2017.1/1500036 (2017/03/27)
```

If one or more of the applicable projects is private, then two or more emails may be sent. In order for the existence of the private project to be hidden from non-members, any email sent to them will not contain references to the private project. Members of each private project will receive an email tailored to them which contains references to that private project. The email to the non-private projects will not contain references to any of the private projects in the **X-Swarm-Project** header.

For example, if a review spans three projects, called **Gemini**, **Apollo**, and **Ultra**, where **Ultra** is a private project, then members of projects **Gemini** and **Apollo** will receive an email with the following headers:

```
X-Swarm-Project: gemini, apollo
X-Swarm-Host: swarm.perforce.com
X-Swarm-Version: SWARM/2017.1/1500036 (2017/03/27)
```

Members of the **Ultra** project will receive an email with the following header:

```
X-Swarm-Project: ultra
X-Swarm-Host: swarm.perforce.com
X-Swarm-Version: SWARM/2017.1/1500036 (2017/03/27)
```

This can result in users receiving two notification emails (if they are members of **Ultra** and one of the other two projects), but privacy for the private project is preserved.

Emoji

By default, Swarm uses a font to provide Emoji images. Swarm can make use of Emoji images from the [Gemoji project](#). Gemoji provides support for more Emojis and works on more browsers and platforms than the font Swarm normally uses.

Due to licensing issues, Gemoji cannot be distributed with Swarm. You can use the Gemoji images after following these steps:

1. Download the latest release (currently 3.0.0) of the [Gemoji project](#) from their [releases page](#).
2. Unpack the release archive into `SWARM_ROOT/public/vendor`.

After unpacking, you should see a new folder: `SWARM_ROOT/public/vendor/gemoji-3.0.0`

`3.0.0` represents the version of Gemoji, which may differ if you downloaded a different or newer release.

3. Rename the new folder:

```
$ cd SWARM_ROOT/public/vendor
$ mv gemoji-3.0.0 gemoji
```

Replace `3.0.0` in the above command if you have downloaded a different or newer release of Gemoji.

4. Ensure that the new images are readable.

```
$ cd SWARM_ROOT/public/vendor
$ chmod -R +r gemoji
```

Swarm detects and uses Gemoji images automatically.

Environment

This section describes the *environment* configuration items available for Swarm:

- **mode**: whether Swarm operates in *production* or *development* mode.
- **hostname**: specifies the canonical hostname Swarm should use, such as in links to Swarm in email notifications.
- **external_url**: specifies the canonical URL Swarm should use, such as in links to Swarm in email notifications. Swarm can often auto-detect the correct URL, but use of `external_url` might be necessary in complex web hosting environments.
- **base_url**: specifies the folder name Swarm is installed within when Swarm is not installed in the web server's document root.

Add the following configuration block to the `SWARM_ROOT/data/config.php` file:

```
<?php
// this block should be a peer of 'p4'
```

```
'environment' => array(  
  'mode'          => 'development',      // defaults to 'production'  
  'hostname'     => 'myswarm.hostname', // defaults to requested  
hostname  
  'external_url' => null,                // defaults to null  
  'base_url'     => null,                // defaults to null  
)
```

mode

By default, Swarm operates in *production* mode. When **mode** is set to **development**, Swarm displays greater error detail in the browser. Also, Swarm switches from including aggregated and minified JavaScript and CSS to requesting each JavaScript and CSS resource for all active modules. The default value is production. Any value other than **development** is assumed to mean production.

development mode makes it easier to discover problems and to identify their source, but also incurs additional browser overhead due to many more JavaScript and CSS requests for larger files. We recommend that you do not use development mode in production environments, unless directed to do so by Perforce technical support.

hostname

The **hostname** item allows you to specify Swarm's hostname. This could be useful if you have multiple virtual hosts deployed for a single Swarm instance; Swarm uses the hostname you configure when generating its web pages and email notifications.

Note

The value specified for the **hostname** item should be just the hostname. It should not include a scheme (e.g. "**http://**"), nor should it include a port (e.g. "**:80**").

external_url

The **external_url** item allows you to specify Swarm's canonical URL. This is useful if your Swarm instance is proxied behind another web service, such as a load balancer, caching proxy, etc., because Swarm's auto-detection of the current hostname or port could otherwise result in incorrect self-referencing URLs.

When specified, Swarm uses the **external_url** item as the prefix for any URLs it creates that link to itself in its web pages and email notifications.

Note

Any path components included in **external_url** are ignored. If you specify

`https://myswarm.url:8080/a/b/c`, Swarm only uses `https://myswarm.url:8080/` when composing URLs.

Important

If you specify `base_url` along with `external_url` and you have deployed multiple Swarm instances that connect to the same Helix Server, ensure that all Swarm instances specify the same `base_url`. Varying `base_url` amongst cooperating Swarm instances is not supported.

base_url

The `base_url` item allows you to specify Swarm's folder within the web server's document root. This is useful if you cannot configure Swarm to operate within its own virtual host, such as when you have an existing web service and Swarm must exist alongside other applications or content.

By default, `base_url` is null, which is equivalent to specifying `/`. If you specify a folder, include the leading `/`. For example, `/swarm`.

Important

If you specify `external_url` along with `base_url` and you have deployed multiple Swarm instances that connect to the same Helix Server, ensure that all Swarm instances specify the same `base_url`. Varying `base_url` amongst cooperating Swarm instances is not supported.

Excluding Users from Activity Streams

Larger Helix Server installations often have one or more *service* users that perform automated tasks, such as build systems, continuous integration test servers, integrations with 3rd-party databases via P4DTG, or with Git via Perforce Git Fusion.

As Swarm reports the activity of users, and these service users can generate significant volumes of activity entries, Swarm provides a mechanism to ignore activity from specified users.

Update the `SWARM_ROOT/data/config.php` file to include the following configuration block:

```
<?php
    // this block should be a peer of 'p4'
    'activity' => array(
        'ignored_users' => array(
            'git-fusion-user',
            'p4dtguser',
            'system',
        ),
    ),
```

After `SWARM_ROOT/data/config.php` is updated, Swarm no longer records activity for any of the listed users. Any previously recorded activity is included in activity streams.

Files configuration

Swarm can be customized using the following config items:

`max_size`

Swarm limits the size of files that are displayed in a review or standard file view. This defaults to 1MB, but can be configured to be larger or smaller. Files larger than this will be truncated.

If the value is set to zero, then the file size is unlimited.

```
<?php
// this block should be a peer of 'p4'
'files' => array(
    'max_size' => 1 * 1024 * 1024, // 1MB (in bytes)
),
```

`download_timeout`

When downloading files, there is a timeout which defaults to 30 minutes. This can be changed by setting the `download_timeout` configurable to a value in seconds. Alternatively, setting it to zero removes the timeout.

```
<?php
// this block should be a peer of 'p4'
'files' => array(
    'download_timeout' => 1800, // seconds (30 minutes)
),
```

Groups configuration

By default, Swarm allows all users to see the list of user groups under the 'Groups' tab in the top bar. Users can view the members of a group, as well as their activities.

You configure the visibility of this tab with the groups configuration block in the `SWARM_ROOT/data/config.php` file, as in the following example:

```
<?php
// this block should be a peer of 'p4'
'groups' => array(
```

```

    'super_only' => true,
  ),

```

Setting the `super_only` option to `true` hides the groups tab from non-admin users.

Ignored users for reviews

Automated test environments may inadvertently participate in code reviews if they copy user-generated change descriptions. For example, if an automated system copied a change description containing `#review` and subsequently shelved or committed files, a new review would be started. Similarly copying a description with `#review-123` could inadvertently update an existing review. As test environments may involve thousands or millions of tests, such interactions can potentially generate far too many Swarm notifications.

To mitigate this problem, Swarm can be configured to ignore specified users for the purposes of starting or updating a review. Edit the `SWARM_ROOT/data/config.php` file, and provide the list of users to ignore in the `ignored_users` item in the reviews configuration block. For example:

```

<?php
    // this block should be a peer of 'p4'
    'reviews' => array(
        'ignored_users' => array('build_user1', 'build_user2'),
    ),

```

License

Helix Swarm has always been free to use with an unlicensed Helix Server. With the 2014.4 release, Swarm is free to use with any Helix Server. You no longer need to purchase a Swarm-specific license, and any existing Swarm-specific licenses are no longer evaluated.

An unlicensed Helix Server provides unlimited use for up to 5 users and 20 workspaces. When the user or workspace limit is crossed, Helix Server imposes a maximum of 1,000 files. Swarm honors the restrictions of Helix Server.

Locale

Swarm is fully localized; with an appropriate language pack installation, Swarm can support users in multiple languages.

A language pack consists of `gettext-style default.po` and `default.mo` files, placed in a folder named for the locale they represent, within the language folder in the Swarm root directory. In addition, language packs contain two javascript files to provide translation strings for the in-browser UI, `locale.js` and `locale.jsgz`, which both appear in the `SWARM_ROOT/public/build/language` folder.

The following example illustrates the directory layout of a language pack:


```
SWARM_ROOT/  
  language/  
    locale/  
      default.mo  
      default.po  
  public/  
    build/  
      language/  
        locale.js  
        locale.jsgz
```

You can configure certain localization behaviors with the **translator** configuration block in the `SWARM_ROOT/data/config.php` file. Here is an example:

```
<?php  
  // this block should be a peer of 'p4'  
  |'translator' => array(  
    'detect_locale'           => true,  
    'locale'                  => "",  
    'translation_file_patterns' => array(),  
  ),
```

The **detect_locale** key determines whether Swarm attempts to detect the browser's locale. The default value is **true**. Set the value to **false** to disable browser locale detection.

The **locale** key is a string specifying the default locale for Swarm. Alternately, an array of 2 strings can be used to specify the default locale, and a fallback locale. For example:

```
<?php  
  // this block should be a peer of 'p4'  
  'translator' => array(  
    'locale'                  => array("en_GB", "en_US"),  
  ),
```

The **translation_file_patterns** key allows you to customize Zend's translation infrastructure, which you might do if you are developing your own language pack. For details, see [Zend\I18n](#).

Logging

Helix Swarm is a web application, so there are several types of logging involved during the course of Swarm's normal operations.

Web server logging

All accesses to Swarm may be logged by the web server hosting Swarm. As web server log configuration is web server specific, refer to your web server's documentation. Since we recommend the use of Apache, more information regarding log configuration in Apache can be found here:

<https://httpd.apache.org/docs/2.2/logs.html>

Helix Core Server logs

Swarm communicates with the associated Helix Server for every page request. Review the Swarm-generated requests on your Helix Server by enabling logging.

For more information, see [Configuring logging](#) and [Auditing user file access](#) in the *Helix Core Server Administrator Guide: Fundamentals*.

Swarm logs

Depending on the log configuration you provide to Swarm, Swarm can log its own operations. Swarm's logs are much more helpful if you encounter problems.

Swarm stores its log data in the `SWARM_ROOT/data/log` file. The volume of entries recorded in the log depends on the configuration stored in the `SWARM_ROOT/data/config.php` file. Here is an example:

```
<?php
    // this block should be a peer of 'p4'
    'log' => array(
        'priority' => 3, // 7 for max, defaults to 3
    ),
```

The log **priority** specifies the importance of the messages to be logged. When **priority** is set to **0** (the lowest value), only the most important messages are logged. When **priority** is set to **7** (the highest value), all messages, including the least important messages, are logged. The default priority is **3**.

The different priority levels are:

Priority	Description
0	Emergency: a message about a system instability
1	Alert: a message about a required immediate action
2	Critical: a message about a critical condition
3	Error: a message about an error
4	Warning: a message about a warning condition

Priority	Description
5	Notice: a message about a normal but significant condition
6	Info: an informational message
7	Debug: a debugging message

Note

Setting **priority** to a value higher than 7 does not result in increased logging. Setting **priority** to a value lower than 0 does not result in reduced logging.

Trigger Token Errors

If the trigger tokens are missing or invalid, the web server error log contains a suitable error:

```
queue/add attempted with invalid/missing token: token used
```

A token is *invalid* when it is not formed from the characters A through Z (in upper or lowercase), 0 through 9, or a dash (-).

A token is *missing* when a file using the token as its name does not exist in the `SWARM_ROOT/data/queue/tokens` directory.

Performance logging

Swarm logs warnings whenever commands issued to the Helix Server take longer than expected to complete. These warnings can be used to diagnose performance problems in the Helix Server.

Note

By default, warnings are not captured in the Swarm log. To capture warnings, the **log priority** must be set to 4 or higher.

The default configuration is:

```
<?php
    // this block should be placed within the 'p4' block
    'slow_command_logging' => array(
        3, // commands without a specific rule have a 3-second limit
        10 => array('print', 'shelve', 'submit', 'sync', 'unshelve'),
    ),
```

In this configuration block, the numeric key specifies the time threshold in seconds, and the value (if present) is an array of Helix Server commands that should use the threshold. Should a command be associated with multiple thresholds, the largest is used for that command.

In addition, Swarm automatically detects when the PHP extension **xhprof** is installed and collects profiling data for requests that take longer than expected. The profiling data could be helpful in diagnosing performance issues within Swarm itself, particularly when analyzed in combination with the slow command logging described above. When collected, profiling data is stored in the `SWARM_ROOT/data/xhprof` folder.

The default configuration is:

```
<?php
// this block should be a peer of 'p4'
'xhprof' => array(
    'slow_time'      => 3, // the threshold in seconds
    'ignored_routes' => array('download', 'imagick', 'libreoffice',
'worker'),
),
```

`slow_time` specifies the threshold, in seconds, that should be used to determine when a Swarm request is slow. `ignored_routes` is an array that specifies a list of Zend Framework `route` names that should not be profiled. For example, Swarm's **Files** module specifies that the download route should be ignored from profiling as downloads could take significantly longer than the default threshold.

Note

Depending on the performance of the server hosting Swarm, and particularly the performance of the associated Helix Server, you may want to monitor the `SWARM_ROOT/data/xhprof` folder for disk usage. Each request that exceeds the time threshold causes 200-600KB of data to be written.

Mainline branch identification

When viewing a project's files, the initial view is the list of the project's branches. The branches appear in alphabetical order, but the branch identified as the main branch appears first and bolded.

Swarm uses a list of names to identify which of a project branches should be considered as the main branch. The default names are *main*, *mainline*, *master*, and *trunk*.

You can adjust the configuration to match your local branch naming convention. Here is an example of the configuration block:

```
<?php
// this block should be a peer of 'p4'
'projects' => array(
    'mainlines' => array(
        'main', 'mainline', 'master', 'trunk',
    ),
),
```

Notifications

Swarm can be configured to provide generic notifications of committed changes in Helix Server, taking the role of a review daemon.

Notifications configuration is expressed with a **notifications** block in the `SWARM_ROOT/data/config.php` file, similar to the following example:

```
<?php
    // this block should be a peer of 'p4'
    'notifications' => array(
        'honor_p4_reviews'      => false,                // defaults to
false
        'opt_in_review_path'    => '//depot/swarmReviews', // required if
honor_p4_reviews is true; defaults to ''
        'disable_change_emails' => false,                // optional;
defaults to false
    ),
```

If **honor_p4_reviews** is set to **true**, then **opt_in_review_path** must be set to a path somewhere in the depot. This path does not need to point to an actual file that exists, but it must be accessible by all users who want to make use of this functionality. For example:

```
'notifications' => array(
    'honor_p4_reviews'    => true,
    'opt_in_review_path' => '//depot/swarmReviews',
),
```

If these two values are set, then users can make use of the Perforce review functionality by subscribing to the **opt_in_review_path** in their user spec. Any user subscribed to that file, will receive notifications for all the other paths they are subscribed to.

We recommend that **opt_in_review_path** point to a file that does not exist. Ideally, it points to a file that no user is likely to want to create. It must however be in a valid depot.

For example, if a user has the following review paths set in their user spec:

```
$ p4 user -o asmith
User:    asmith

Email:   asmith@example.com

FullName:      Alice Smith

Reviews:
    //depot/swarmReviews
```

```
//depot/main/acme/...
//depot/main/orion/...
//depot/dev/asmith/...
```

The `//depot/swarmReviews` means that this user is subscribed to the path set in `opt_in_review_path`, and therefore will receive notifications. The rest of the subscription lines define which paths in the depot this user is interested in. Therefore this user will receive a notification for a change made to `//depot/main/acme/foo.txt`, but not a change made to `//depot/dev/acme/foo.txt`.

For example, to see which users are subscribed to receive notifications you can run `p4 reviews <path>` against the `opt_in_review_path` value:

```
$ p4 reviews //depot/swarmReviews
asmith <asmith@example.com> (Alice Smith)
bbrown <bbrown@example.com> (Bob Brown)
erogers <erogers@example.com> (Eve Rogers)
```

To see which users are subscribed to files in a particular changelist, you can run `p4 reviews -c <changelist>`. Swarm will notify the users who subscribe to both the review of this changelist and the review path, `opt_in_review_path`.

- **honor_p4_reviews**: When set to `true`, Swarm sends notification emails for every committed change to all users where the change matches one of their `Reviews:` paths.
- **opt_in_review_path**: Optional item, required only if `honor_p4_reviews` is set. This item specifies a special depot path, which typically would not exist in the Helix Server machine. When a path is specified, users must include this path (or a path that contains it) in the `Reviews:` field of their user spec to cause Swarm to send the user a notification for every committed change that matches one of their `Reviews:` paths.

For example, if the `opt_in_review_path` is set to `//depot/swarmReviews`, users can opt-in to Swarm review notifications by adding that path, or a path such as `//depot/...`, to the `Reviews:` field in their user spec.

- **disable_change_emails**: Optional item. When set to `true`, notifications for committed changes, based on the `Reviews:` field and the users and projects you follow, are disabled. Notifications for reviews and comments will still be sent.

Note

If your Helix Server machine already has a review daemon in operation, users receive two notifications for `Reviews:` paths. You may want to deprecate the review daemon in favor of Swarm's change notifications.

Note

"Groups" on page 220 have per-group notification settings. See "Add a group" on page 305 for details.

Global settings

There are many situations that can result in email notifications being sent out to users and groups. Whilst it is possible for a user and group owner to configure their own settings, it is also possible for the system owner to configure the defaults for all users and groups by modifying the settings in the `config.php`.

Note

- **If a group owner is not specified for the group:** only users with *super* privileges can configure group notification settings.
- **If one or more group owners are specified for the group:** only group owners and users with *super* privileges can configure group notification settings.

Each notification consists of an **Event** and a **Role**. The **Event** is what happened (for example, a new review was created, a file was submitted) and the **Role** is the role of the user or group who could receive a notification. A user or group can belong to multiple roles, in which case if any of them are set to send a notification, then the user or group will receive a notification.

For example, when a review is voted on (`review_vote`), there are a number of roles of users, and groups that could be notified:

- **Users:** the user that voted on the review (`is_self`), the author of the review (`is_author`), a user who is a moderator of the project branch the review is in (`is_moderator`), and a user who is a reviewer of the review (`is_reviewer`).
- **Groups:** members of a moderator group for the project branch the review is in (`is_moderator`), and members of a reviewer group for the review (`is_reviewer`).

Configuration options

By default, all notifications are enabled for all roles. The system-wide defaults can be changed by adding the following options into the notifications block of the `SWARM_ROOT/data/config.php`. These options are in addition to those described above.

```
<?php
// this block should be a peer of 'p4'
'notifications' => array(
    'review_new' => array(
        'is_author' => 'Enabled',
        'is_member' => 'Enabled',
    ),
    'review_files' => array(
        'is_self'      => 'Enabled',
        'is_author'    => 'Enabled',
        'is_reviewer' => 'Enabled',
        'is_moderator' => 'Enabled',
    ),
)
```

```
),
  'review_vote' => array(
    'is_self'      => 'Enabled',
    'is_author'    => 'Enabled',
    'is_reviewer'  => 'Enabled',
    'is_moderator' => 'Enabled',
  ),
  'review_required_vote' => array(
    'is_self'      => 'Enabled',
    'is_author'    => 'Enabled',
    'is_reviewer'  => 'Enabled',
    'is_moderator' => 'Enabled',
  ),
  'review_optional_vote' => array(
    'is_self'      => 'Enabled',
    'is_author'    => 'Enabled',
    'is_reviewer'  => 'Enabled',
    'is_moderator' => 'Enabled',
  ),
  'review_state' => array(
    'is_self'      => 'Disabled',
    'is_author'    => 'Enabled',
    'is_reviewer'  => 'Enabled',
    'is_moderator' => 'Enabled',
  ),
  'review_tests' => array(
    'is_author'    => 'Enabled',
    'is_reviewer'  => 'Enabled',
    'is_moderator' => 'Enabled',
  ),
  'review_changelist_commit' => array(
    'is_author'    => 'Enabled',
    'is_reviewer'  => 'Enabled',
    'is_member'    => 'Enabled',
    'is_moderator' => 'Enabled',
  ),
  'review_comment_new' => array(
```



```
        'is_author'    => 'Enabled',
        'is_reviewer' => 'Enabled',
    ),
    'review_comment_update' => array(
        'is_author'    => 'Enabled',
        'is_reviewer' => 'Enabled',
    ),
    'review_comment_liked' => array(
        'is_commenter' => 'Enabled',
    ),
    'review_opened_issue' => array(
        'is_self'      => 'Enabled',
        'is_author'    => 'Enabled',
        'is_reviewer' => 'Enabled',
        'is_moderator' => 'Enabled',
    ),
    'review_join_leave' => array (
        'is_self'      => 'Enabled',
        'is_author'    => 'Enabled',
        'is_reviewer' => 'Enabled',
        'is_moderator' => 'Enabled',
    ),
)
```

Each setting can have one of four possible values to either enable or disable notifications of that type. If multiple settings apply to a given event, then a user will receive a notification if *any* of them are enabled.

- **Enabled:** Notifications for this event and role are enabled, and a user will receive emails by default.
- **Disabled:** Notifications for this event and role are disabled, and a user will not receive emails by default.
- **ForcedEnabled:** Same as for Enabled, but this is forced enabled for all users. An individual user is not able to disable this notification type on their settings page.
- **ForcedDisabled:** As for Disabled, but this is forced disabled for all users. An individual user will not be able to enable this notification type on their settings page.

Unless one of the forced options is used, system wide options can be overridden by individual users and group owners, who can configure which notifications they receive.

Notification Roles

The various roles are as follows:

- **is_self**: This role is the user who changed the state of the review.
- **is_author**: This role is the user who was the author of the review.
- **is_reviewer**: This role includes all users and groups who are listed as being a reviewer on the review.
- **is_member**: This role includes all users who are a member of the project in which the event happened.
- **is_moderator**: This role includes all users and groups who are listed as being a moderator of the project branch in which the event happened.
- **is_follower**: This role includes all users who are followers of the project in which the event happened.
- **is_commenter**: This role is the user who was the author of a comment.

Notification events

An event is the action that causes the notification:

- **review_new**: A new review has been created.
- **review_files**: Files have been added to a review.
- **review_vote**: A user has voted on a review.
- **review_state**: The status of a review has been changed.
- **review_tests**: Automated tests have failed for a review. The first time automated tests pass for a review after a test failure for that review.
- **review_changelist_commit**: Files on a review have been committed.
- **review_comment_new**: A comment has been added to a review.
- **review_comment_update**: A comment on a review has been updated.
- **review_comment_liked**: A user has liked a comment.
- **review_join_leave**: A user or group has joined or left a review.

OVA Management

The Helix Swarm OVA is installed with Ubuntu 16.04 LTS. Ubuntu's "Long-Term Support" releases receive security updates periodically over their 5-year support window. We recommend that use of the OVA involve package updates from time to time, which can be accomplished as follows:

1. Log in to the OVA as `root`. The password for the root account was established during `setup`.
2. Update the catalog of available packages:

```
# apt-get update
```

3. Download and install any updated packages:

```
# apt-get upgrade
```

See "Package management with APT" for more information:

<https://help.ubuntu.com/community/AptGet/Howto>

Dependency Conflicts

Ubuntu software packages are often dependent on other packages that provide, for example, common libraries, utilities, and configuration. Occasionally, an upgraded package may have differing dependencies than its previous version, which can lead to dependency conflicts that can prevent package updates from completing successfully.

Should this situation occur with the Swarm OVA, use the following command to use "smart" conflict resolution, which attempts to upgrade the most important packages at the expense of less important packages if necessary:

```
# apt-get dist-upgrade
```

Warning

Upgrading packages could potentially make the OVA-hosted Swarm no longer functional. If you use the Swarm OVA in a production environment, perform the package updates on a copy of the OVA and test that Swarm continues to function properly.

P4TRUST

When Swarm is configured to connect to a Helix Server (`p4d`) using an SSL connection, Swarm automatically executes the `p4 trust` command, which accepts the SSL fingerprint and creates the file `SWARM_ROOT/data/p4trust` containing a list of trusted servers and their fingerprints. If the certificate that `p4d` uses is changed for any reason, then when `p4d` is restarted, Swarm connections to `p4d` fail.

The solution is to delete `SWARM_ROOT/data/p4trust`. On the next request to Swarm, `p4 trust` is again automatically executed and Swarm can then connect to `p4d`.

Projects

This section describes the configurables that can be set for projects.

Restrict project name and branch definition editing to administrators

By default, once a project has been created, any member of the project can edit or delete the project's settings. Projects can also be set to **Only Owners and Administrators can edit the project**, only owners and administrators can make changes to the project.

Instead of allowing any changes, or preventing all changes, you may want to prevent project members from making specific changes, such as to the project's name (and associated identifier), or adjusting the branch definition(s). This is useful when build infrastructure or other tooling treats these details as operational configuration, but you still want members to be able to adjust other aspects of the project configuration.

To do so, edit the `SWARM_ROOT/data/config.php` file, and set the following two items, similar to the following example:

```
'projects' => array(
    'edit_name_admin_only'      => true,
    'edit_branches_admin_only' => true,
),
```

- **edit_name_admin_only**: when set to true, only users with *admin* privileges in the Helix Server can modify a project's name.
- **edit_branches_admin_only**: when set to true, only users with *admin* privileges in the Helix Server can modify a project's branch definition(s).

Both items default to `false`.

Limit adding projects to administrators

By default, any authenticated user can add new projects. Swarm can restrict project creation to users with *admin*-level privileges or higher. Once restricted, Swarm prevents non-administrators from adding projects, and does not display the + icon to add a project to non-administrators.

Add or update the following configuration block to the `SWARM_ROOT/data/config.php` file, at the same level as the `p4` entry:

```
<?php
// this block should be a peer of 'p4'
'projects' => array(
    'add_admin_only' => true,
),
```

Important

If `add_admin_only` is enabled and `add_groups_only` has one or more groups configured, project creation is only available to users with administrator privileges and who are members of the specified groups.

Limit adding projects to members of specific groups

Swarm can restrict project creation to members of specific groups. The groups and membership need to be defined in the Helix Server.

Add or update the following configuration block to the `SWARM_ROOT/data/config.php` file, at the same level as the `p4` entry:

```
<?php
// this block should be a peer of 'p4'
'projects' => array(
    'add_groups_only' => array('wizards', 'slayers', 'phbs'),
),
```

Important

If `add_admin_only` is also enabled, project creation is only available to users with administrator privileges **and** who are members of the specified groups.

Project readme

Projects can have a `README.md` file associated with them that is automatically displayed on the project overview page. This file is read from the root of the project's mainline if it is available, and shown above the activity feed. See "[Mainline branch identification](#)" on page 392 for details on configuring the project mainline.

Add or update the following configuration block to the `SWARM_ROOT/data/config.php` file, at the same level as the `p4` entry:

```
<?php
// this block should be a peer of 'p4'
'projects' => array(
    'readme_mode' => 'restricted',
),
```

- **disabled**: the use of `README.md` file will be disabled and no text content will be shown in the project overview page.

- **restricted**: the content of the README.md file is displayed, but Markdown support is limited to prevent execution of raw HTML and JavaScript content. This is the default.
- **unrestricted**: the content of the README.md file is displayed, and Markdown support is unrestricted, allowing full HTML and JavaScript to be used. This is insecure as any person with access to the README.md file can add script to the page which would execute as the currently logged in user.

Projects tab initial fetch

By default, all of the projects are fetched for the **Projects** tab with a single call. If your Swarm system has a large number of projects, it can take some time to populate the **Projects** tab. The `fetch` configurable is used to tell Swarm to fetch and display the first `x` projects and then load the rest from cache in the background. This speeds up the initial display of projects in the **Projects** tab.

Add or update the following configuration block to the `SWARM_ROOT/data/config.php` file, at the same level as the `p4` entry:

```
<?php
    // this block should be a peer of 'p4'
    'projects' => array(
        'fetch' => array('maximum' => 50), // defaults to 0 (disabled)
    ),
```

The default value is `0`, all projects are fetched in a single call.

Review cleanup

When a review is created in Swarm, it creates its own version of the changelist, leaving the user's own changelist untouched so as not to interfere with the user's ongoing work. Each time new work is submitted to the review, Swarm creates a new changelist so that there is a versioned history of the review.

When the review is finally committed it is Swarm's own changelist that is committed. Swarm's changelists are generally hidden from the users, but the user's changelist will remain open. By default it is necessary for the user to tidy up and remove this changelist themselves after the review has been completed.

There is an option to do this automatically when the review is committed. Configuration for this is expressed with a `reviews` block in the `SWARM_ROOT/data/config.php` file, similar to the following example:

```
<?php
    'reviews' => array(
        'cleanup' => array(
            'mode' => 'user', // auto - follow default, user -
present checkbox(with default)
            'default' => false, // clean up pending changelists on
```

```
commit
    'reopenFiles' => false,    // re-open any opened files into the
default changelist
    ),
),
```

By default, this option is enabled but defaults to no clean up (so a user can select the option if they want to when they commit a review).

If the Helix Server user that Swarm is configured to use is a super user, then the user can clean up all user changelists associated with a review. If this is not the case, then the user who commits a review can only clean up changelists that are in their name.

By default, Swarm only cleans up changelists that are owned by the committing user. In the case where a user is committing a review that has been contributed to by other users, their changelists will not be cleaned up.

If you want to configure Swarm to clean up all changelists contributing to a review, regardless of whether they are owned by the committing user, you can do this by granting the Helix Server user that Swarm is configured as 'super' permissions/privileges (rather than just the 'admin' permissions/privileges that swarm requires for its other operations).

Note

There is an API option that allows full cleanup to be executed with super permissions using an external script. This removes the need for the Swarm Helix Server user to have super privileges. See the API notes for details on this.

■ mode

If the mode is `user` then a checkbox is displayed when a review is committed, and the user has the option as to whether to clean up changelists or not.

If the mode is `auto`, then no checkbox is displayed, and all committed reviews will either always be tidied up, or never will be, depending on the value of `default`.

■ default

If mode is set to `user`, then this determines whether the checkbox shown on commit is ticked by default or not.

If mode is set to `auto`, then it determines the action to be taken automatically. If set to `true` then changelists will always be cleaned up, otherwise they will never be cleaned up.

- **reopenFiles**

If a changelist has files checked out (not shelved), then it cannot be deleted. Setting **reopenFiles** to **true** will mean that when a changelist is cleaned up, any opened files will first be moved to the default changelist, allowing the changelist to be removed.

If set to **false**, then a changelist with checked out files will not be cleaned up.

If users normally revert their files after shelving them, then this option may not be needed. If set to **true** then it may result in files appearing in the user's default changelist unexpectedly.

The review cleanup feature is designed to help users keep their workspaces clean, and prevent the proliferation of unwanted changelists after reviews have been approved and committed.

However, it cannot guarantee to be perfect, and because it is taking actions automatically on the part of the user, it may do things that the user doesn't expect. The following caveats should be kept in mind when using this feature.

- The changelists created by Swarm itself will not be touched by this process. There will always be a record of the review history that is kept.
- If the user who commits a review is normally different to the user that did the work, then unless Swarm runs as a super user then many changelists will not be cleaned up.
- If the committer created some of the changelists, then those changelists will be removed. However, changelists created by other users will not be removed.
- If the user has shelved files into changelists without reverting them, then they will still remain in the user's local workspace, and will need to be cleaned up manually.

There is an API endpoint available which can be used by a *super user* to tidy up changelists which can't be removed automatically. See [API Endpoints](#) for details.

Review keyword

This section describes how to configure keywords, and how to use keywords in a changelist description to create a review, and add a changelist to a review.

Review keyword configuration

The keyword can be configured with a regular expression so that most any keyword syntax can be used. If you choose to customize the review keyword, take care to choose syntax and terminology that is unlikely to occur in a changelist description, to avoid unexpected Swarm activity.

To configure the review keyword, add the following block to the `SWARM_ROOT/data/config.php` file:

```
<?php
// this block should be a peer of 'p4'
'reviews' => array(
    'patterns' => array(
        'octothorpe' => array( // #review or #review-1234 with
```



```

surrounding whitespace/eol
    'regex'  => '/(?P<pre>(?:\s|^)\ (?)\#
(?P<keyword>review|append|replace) (?:- (?P<id>[0-9]+)) ? (?P<post>[.,!?:;]) *
(=?\s|$))/i',
    'spec'   => '%pre%#%keyword%-%id%post%',
    'insert' => "%description%\n\n#review-%id%",
    'strip'  => '/^\s*\#(review|append|replace) (-[0-9]+)?
(\s+|$) | (\s+|^)\#(review|append|replace) (-[0-9]+)?\s*$/i',
    ),

    'leading-square' => array(      // [review] or [review-1234] at
start
    'regex'  => '/^(?P<pre>\s*)\
[ (?P<keyword>review|append|replace) (?:- (?P<id>[0-9]+)) ?\ ] (?P<post>\s*)/i',
    'spec'   => '%pre%[%keyword%-%id%]%post%',
    ),

    'trailing-square' => array(     // [review] or [review-1234]
at end
    'regex'  => '/(?P<pre>\s*)\
[ (?P<keyword>review|append|replace) (?:- (?P<id>[0-9]+)) ?\ ]
(?P<post>\s*) ?$/i',
    'spec'   => '%pre%[%keyword%-%id%]%post%',
    ),
    ),
    ),
),

```

Multiple patterns can be specified; the first successful match is used and none of the other patterns are evaluated.

The keyword types are grouped under their identifiers. In each group, the **regex** item specifies the regular expression to be used to identify the review keyword in the changelist description. The spec item is used when the review keyword needs to be updated.

Note

The use of named capture groups in the **regex**, for example `(?<pre>\s*)`. The values captured during regex matching are used to replace any identically named placeholder values in the spec item that are surrounded by percent % characters. In the example configuration above, the pre and post capture groups and placeholders maintain any whitespace surrounding the review keyword.

For **octothorpe** (or "hashtag") review keywords, these can appear anywhere in the changelist description. The **strip** item is used to ensure that the keyword is removed from the review description if it appears at the start or end of the changelist description. The **insert** item is currently not used; it is included here to prevent future upgrade issues. The intended use case is when a review is started and the changelist does not already contain a review keyword, the insert item would be used to add the review keyword to the changelist description.

For more information on named capture groups in PHP, see: <http://www.regular-expressions.info/named.html>

Create a review

By default, including the keyword **#review** within a changelist description (separated from other text with whitespace, or on a separate line) tells Swarm that a review should begin when the changelist is shelved or committed.

Once a review has begun, Swarm adds the review identifier to the **#review** keyword, for example **#review-1234**. This tells Swarm which review should be updated whenever the original changelist is re-shelved or committed.

Note

- If you create a pre-commit review and a user appends a changelist to your review, the default add mode of your review is changed from replace to append, see "[Add a changelist to a review](#)" below for details.
- Swarm acts on the first valid keyword it finds in the changelist description, Swarm then ignores any further valid keywords it finds in the description.
- Swarm can also accept **[review]** at the start or end of the changelist description, but this form of review keyword is now deprecated and is likely to be removed in a future version of Swarm.

Add a changelist to a review

Once a review has been started you can add a changelist to the review. It can be useful to add changelists to an existing review. For example, if follow up changes are made to files in a review or if you need to group a number of changelists under a single review.

Note

The changelist must not be part of another review, if it is Swarm will reject it.

Note

Swarm acts on the first valid keyword it finds in the changelist description, Swarm then ignores any further valid keywords it finds in the description.

By default, the `#append-`, `#replace-`, and `#review-` keywords along with the *review identifier* (separated from other text with whitespace, or on a separate line) can be used in a changelist description to add changelists to an existing review. The options available depend on whether the review is pre-commit or post-commit:

■ **Pre-commit reviews:**

- `#append-` + *review identifier*. When you add a changelist to a review with the append option, the files in the changelist are appended to the existing files in the review. This changes the default add mode of the review to append.
- `#replace-` + *review identifier*. When you add a changelist to a review with the replace option, all of the files in the review are replaced with the files in the changelist you are adding to the review. This changes the default add mode of the review to replace.

Note

If you replace a pre-commit review with a committed changelist, the new version of the review will be a post-commit review.

- `#review-` + *review identifier*. When you add a changelist to a review with this option, the review's default add method is used. The default add method can be either replace or append and it is set by the most recent add method used on the review:
 - When a review is first created the default add mode for the review is replace.
 - If a changelist is added to the review using append, the default add mode for the review is set to append.
 - If a changelist is added to the review using replace, the default add mode for the review is set to replace.
 - If you do not know what the current default add mode of the review is, delete the `#review-` keyword and specify the add mode you want by using either `#append-` + *review identifier*, or `#replace-` + *review identifier*.

■ **Post-commit reviews:**

- `#review-` or `#replace-` + *review identifier*. When you add a changelist to a review with the replace changelist option, all of the files in the review are replaced with the files in the changelist you are adding to the review.

Note

If you replace a post-commit review with a pending changelist, the new version of the review will be a pre-commit review.

Tip

When the content of a review is changed, Swarm checks to see which branches are in the new revision of the review:

- **If a new branch was added to the review:**
 - Default reviewers on the new branch are added to the review.
 - Moderators from the added branch become moderators for the review alongside the existing moderators.
 - **Only if workflow is enabled:** if the new branch is associated with a workflow, the [workflow is merged](#) with the existing workflow. The most restrictive workflow is used for the review.
- **If a branch is no longer part of the review:**
 - Reviewers for the review are not changed.
 - Moderators from the removed branch no longer moderate the review.
 - **Only if workflow is enabled:** if the branch was associated with a workflow, the branch workflow is removed from the review.

Example: Appending a changelist to review 1234:

Add `#append-1234` to the changelist description.

- Original review contains the following files: A#1, B#2, C#1, D#1, and E#4
- Changelist contains the following files: A#2, C#3, E#4 (marked for delete), and F#1
- Appending the changelist to the original review generates a new revision of the review that contains the following files: A#2, B#2, C#3, D#1, E#4 (marked for delete), and F#1

Important

Committing a review with Swarm (recommended): Swarm automatically commits the files in the approved revision of the review.

Committing a review outside of Swarm:

Before you commit the review:

1. Unshelve the review into the pending changelist associated with the review.
2. Reshelve the files in the pending changelist.
3. Commit the pending changelist.
4. This process ensures that all of the files in the approved revision of the review are committed.

Workflow technology preview feature disabled (default):

Swarm can be configured to automatically check that the files being committed match the files in the approved revision of the review, see the [strict](#) trigger option.

Workflow technology preview feature enabled:

Swarm can be configured to automatically check that the files being committed match the files in the approved revision of the review by using the **On commit with a review** workflow rule. For information about the **On commit with a review** rule, see ["Workflow rules" on page 339](#).

Example: Replacing the files in a review 1234 with the files in a changelist:

Add `#replace-1234` to the changelist description.

- Original review contains the following files: A#1, B#2, C#1, D#1, and E#4
- Changelist contains the following files: A#2, C#3, E#4 (marked for delete), and F#1
- Replacing the original review with the changelist generates a new revision of the review that contains the following files: A#2, C#3, E#4 (marked for delete), and F#1

Tip

When you replace a review with a changelist, the base versions of the files in the new revision of the review are the base versions of the files in the replacement changelist.

Keyword workflow

For workflow examples using keywords, see ["Review creation, and modification outside of Swarm" on page 297](#).

Reviews filter

Swarm review sorting on the ["Reviews list" on page 256](#) page is customized by using the following configuration block in the `SWARM_ROOT/data/config.php` file:

```
<?php
    // this block should be a peer of 'p4'
    'reviews' => array(
        'filters' => array(
            'result_sorting' => true,
            'date_field' => 'updated', // 'created' displays and sorts by created
date,'updated' displays and sorts by last updated
        ),
    ),
```

result_sorting

Controls whether the **Result order** button is displayed on the ["Reviews list" on page 256](#) page.

- Set `result_sorting` to `true` to display the **Result order** button on the "Reviews list" on [page 256](#) page, this is the default setting.
- Set `result_sorting` to `false` to remove the **Result order** button from the "Reviews list" on [page 256](#) page, reviews are sorted by when they were created.

date_field

Note

The `date_field` setting is only used if `result_sorting` is set to `true`.

`date_field` sets the initial setting for the **Result order** button on the "Reviews list" on [page 256](#) page.

- `created`: reviews are sorted by when they were created. This is the default setting.
- `updated`: reviews are sorted by when they were last updated.

When a user starts a new session the **Result order** button is set to the initial sort order set in `date_field`. The review sort order can be changed by the user from the **Result order** button. This setting is remembered even if the user navigates away from the "Reviews list" on [page 256](#) page. When the user starts a new session, the **Result order** button is reset back to the setting in `date_field`.

Reviews

This section describes the configurables that can be set for reviews.

Disable self-approval of reviews by authors

The Swarm 2015.2 release provides the ability to disable review approval by authors, even if they are moderators or administrators. This is useful for development workflows where review by others is of paramount importance.

To disable review approval by authors, update the `SWARM_ROOT/data/config.php` file to include the following configuration item within the reviews block:

```
'reviews' => array(  
    'disable_self_approve' => true,  
),
```

The default value is `false`.

Moderator behavior when a review spans multiple branches

By default, when a review spans multiple project branches that have different moderators, only one moderator from any one of the branches needs to approve the review. Set the configurable to **each** to require one moderator from each branch approve the review. If a moderator belongs to more than one of the branches spanned by the review, their approval will count for each of the branches they belong to.

To require one moderator from each branch to approve a review, edit the `SWARM_ROOT/data/config.php` file and set the `moderator_approval` configurable to **each** in the `reviews` section of the codeblock:

```
'reviews' => array(
    'moderator_approval' => 'each', // 'any|each'
),
```

The default value is **any**.

Prevent Approve for reviews with open tasks

When enabled, Swarm will not allow you to **Approve**, or **Approve and Commit** a review that has open tasks. To approve, or approve and commit a review with open tasks, you must address the tasks first and then set them to **Task Addressed**, or **Not a Task**, see "[Set a task to Task Addressed or Not a Task](#)" on page 199 for details.

Important

If the open tasks on the review are archived, the review can then be approved, or approved and committed.

To prevent reviews being approved, or approved and committed when the review has open tasks, update the `SWARM_ROOT/data/config.php` file to include the following configuration item within the reviews block:

```
'reviews' => array(
    'disable_approve_when_tasks_open' => true,
),
```

The default value is **false**, in this case a warning is displayed for the open tasks but the action is allowed.

Protected end states

By default, you can update the content of a review no matter what state the review is in. Reviews can be protected from content change if they are in a specified state by using the `end_states` configurable.

If workflow is disabled (default):

When the content of a review is updated, the `end_states` array is checked to see if the review can be updated. If the review state matches a state in the `end-states` array the submit is rejected.

If workflow is enabled:

The `end_states` configurable sets the protected review states. A combination of the `global_end_rules` configurable, and `workflows` determines which projects and branches have protected reviews.

To set the protected review states, update the `SWARM_ROOT/data/config.php` file to include the following configuration item within the reviews block. In this example the **Archived**, **Rejected**, and **Approved : Committed** states are specified:

```
'reviews' => array(
    'end_states' => array('archived','rejected',
'approved:commit'),
),
```

Valid review states for the array:

- `archived`: the review state is **Archived**.
- `rejected`: the review state is **Rejected**.
- `approved:commit`: the review has been approved and committed, the review state is **Approved : Commit**.
- `approved`: the review state is **Approved**.

By default the array is empty, review content can be updated no matter what state the review is in.

Process shelf file delete when

By default, when you delete files from a shelved changelist, the files are not removed from the associated review.

When you have a review state set in the `process_shelf_delete_when` array, Swarm will automatically carry out the following steps when a file is deleted from a shelf:

1. Check to see if the shelf is associated with a review.
2. The deleted file is only removed from the review if the review state matches the review state in the `process_shelf_delete_when` array.

Tip

- More than one review state can be specified in the `process_shelf_delete_when` array.
- When files are removed from a review, any votes on the review become stale. The vote counts are reset, and the vote indicators are muted.

- If `process_shelf_delete_when` is configured and the review is in a state that is specified in the array: When the review contains a file that is a common to multiple changelists that are associated with the review, if the owner of any of the associated pending changelists deletes the common file from their shelf, that file will be removed from the review, and a new version of the review will be created. This is true even if the file is not the most recent version in the review.

Important

Required for `process_shelf_delete_when`:

- A supported version of Helix Server (standard maintenance), see ["Helix Core Server requirements" on page 84](#).
- You must have the `swarm.shelvedel shelve-delete` trigger line in the Helix Server trigger table, see ["Helix Core Server configuration for Swarm" on page 127](#).
- You must satisfy the Swarm trigger dependencies, see ["Trigger dependencies" on page 84](#).

Important

Do not use the Swarm user that is configured in the [Swarm configuration file](#) when deleting shelves, or deleting files from shelves. The Swarm logic processes the `shelve-delete` trigger event, if the event is invoked by the Swarm user it is rejected. The delete operations will fail.

To remove files from a review when they have been deleted from an associated shelved changelist and the review is in a specified state, update the `SWARM_ROOT/data/config.php` file to include the following configuration item within the reviews block. In this example the **Needs Review** and **Needs Revision** states are specified:

```
'reviews' => array(
    'process_shelf_delete_when' => array('needsReview',
    'needsRevision'),
),
```

Valid review states for the array:

- `needsReview`: the review state is **Needs Review**.
- `needsRevision`: the review state is **Needs Revision**.
- `rejected`: the review state is **Rejected**.
- `approved`: the review state is **Approved**.
- Leave the array empty to disable this feature, see below. This is the default setting for the array.

```
'reviews' => array(
    'process_shelf_delete_when' => array(),
),
```

Note

If a review is **Approved and Committed** or **Archived**, files will not be removed from the review when they are deleted in an associated shelf. This is true even if the `approved:commit` or `archived` states are in the `process_shelf_delete_when` array.

Allow author change

When enabled, the author of a review can be changed. This is useful in the case where the original author is no longer available, and someone else needs to take over ownership.

To allow the author of a review to be changed, update the `SWARM_ROOT/data/config.php` file to include the following configuration item within the reviews block:

```
'reviews' => array(
    'allow_author_change' => true,
),
```

The default value is `false`.

Allow author obliterate review

When enabled, users can obliterate reviews that they have authored. For details about how to obliterate a review, see "Obliterate Review" on page 417.

Important

By default, only users with `admin` and `super` user rights can obliterate a review. Perforce recommends that the `allow_author_obliterate` configurable is kept at its default value of `false`. An obliterated review cannot be reinstated, not even by Perforce Support.

To allow users to obliterate reviews that they have authored, update the `SWARM_ROOT/data/config.php` file to include the following configuration item within the reviews block:

```
'reviews' => array(
    'allow_author_obliterate' => true,
),
```

The default value is `false`.

Synchronize review description

By enabling the synchronization of review descriptions, it becomes possible to update the description of a review by updating the description of a changelist associated with the review. Whenever an associated changelist is saved, the text of the review will be updated to match.

Note

Attaching another changelist to a review, or updating the files in a changelist will not trigger this update, but updating the description of additional attached changelists will.

To enable synchronize review descriptions, update the `SWARM_ROOT/data/config.php` file to include the following configuration item within the reviews block:

```
'reviews' => array(
    'sync_descriptions' => true,
),
```

The default value is `false`.

Expand all file limit

The review page has an **Expand All** button that opens all the files within that review. If the number of files is large, clicking the button might affect performance.

The `expand_all_file_limit` disables the button if the number of files in the review exceeds the given value. If the value is set to zero, the button is always enabled and can therefore open all the files.

To change the expand all file limit, update the `SWARM_ROOT/data/config.php` file to include the following configuration item within the reviews block:

```
'reviews' => array(
    'expand_all_file_limit' => 10,
),
```

The default value if the option is not specified is `10`.

Expand group reviewers

By default, reviewer group members are not displayed in the *Individuals area* of the reviews page when they interact with a review (vote, comment, update, commit, archive, etc.). This avoids overloading the *Individuals area* with individual avatars if you have large reviewer groups.

Note

An exception to this behavior is when a member of a reviewer group is also an individual **required reviewer**, in this case their avatar will be displayed in the *Individuals area*.

When `expand_group_reviewers` is set to `true`, reviewer group members are added to the *Individuals* area of the review page when they interact with the review (vote, comment, update, commit, archive, etc.). If you have large reviewer groups, this might affect performance.

To expand group reviewers, update the `SWARM_ROOT/data/config.php` file to include the following configuration item within the reviews block:

```
'reviews' => array(
    'expand_group_reviewers' => true,
),
```

The default value is `false`.

Disable tests on approve and commit

When an approved review is committed, `disable_tests_on_approve_commit` is used to determine if the automated tests are run on the commit ([Automated Tests](#) must be configured). This is a global setting and is used for all of the Swarm projects.

Note

- When a changelist is committed outside of Swarm and the changelist has been approved, this setting is used to determine if automated tests should be run.
- When a changelist is committed outside of Swarm and the changelist does not have a review, this setting is ignored and the automated tests are run.
- When a changelist is committed outside of Swarm and the changelist has not been approved, this setting is ignored and the automated tests are run.

Tip

The `disable_tests_on_approve_commit` setting is also used when **Approve and Commit** is selected from [Review State dropdown](#) button on the review page.

To disable tests on approve and commit, update the `SWARM_ROOT/data/config.php` file to include the following configuration item within the reviews block:

```
'reviews' => array(
    'disable_tests_on_approve_commit' => true,
),
```

- `disable_tests_on_approve_commit = false`: automated tests will be run when a review is approved and committed. This is the default setting.
- `disable_tests_on_approve_commit = true`: automated tests will not be run when a review is approved and committed. This is useful when the tests take a long time and the codeline is stable.

More context lines

The [Review display](#) and [Changelist display](#) pages have **Show More Lines above** and **Show More Lines Below** buttons on the [file diff view](#) when a file is expanded. The buttons are used to display more lines of context for the file being viewed. By default 10 extra lines are displayed.

To change the number of lines displayed when the buttons are clicked, update the [SWARM_ROOT/data/config.php](#) file to include the following configuration item within the reviews block:

```
'reviews' => array(
    'more_context_lines' =>15, // defaults to 10 lines
),
```

The default value if the option is not specified is **10**.

Obliterate Review

Note

- By default, you must be a user with *admin* or *super* user rights to obliterate a review.
- **Optional:** Swarm can be configured to allow users to obliterate reviews that they have authored. Configured by your Swarm administrator, see "[Allow author obliterate review](#)" on [page 414](#).

Obliterate is used to permanently delete reviews that have been created by mistake. For instance, if a review is associated with the wrong changelist, or a review contains sensitive information that should not be openly available.

When you obliterate a review

- **All reviews:**
 - Metadata associated with the review is permanently deleted.
 - Events associated with the review are permanently deleted from the activity feed.
 - The Swarm 404 page is displayed if a user navigates to the review from a Swarm notification email link, or by using the URL.
- **Review with a shelved changelist:**
 - The Swarm review changelist, and any associated shelved files are permanently deleted.
 - Files shelved in the user's associated changelist are left intact.
- **Review with a committed changelist:**
 - The Swarm review changelist is permanently deleted.
 - The committed changelist is left intact.


Obliterate a review

Important

Obliterate must be used with care, the review and all of its associated metadata are permanently deleted. An obliterated review cannot be reinstated, not even by Perforce Support.

To obliterate a review:

1. Navigate to the review.
2. Click the **Review state** button and select **Obliterate Review**.

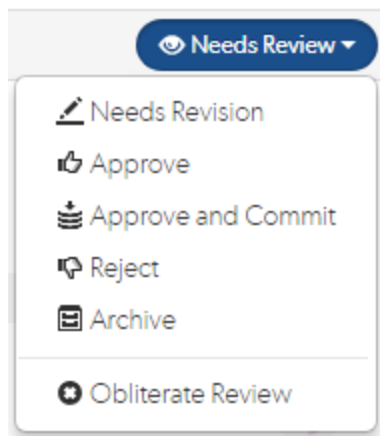

3. Click **Yes** on the confirmation dialog to complete the obliterate action.
4. The review is obliterated.

Search

Swarm's search feature combines user, group, project, and file path searching, with full content indexing provided by the optional Helix Server Search Tool (previously known as P4Search).

You can [download the Helix Server Search Tool](#). See its [release notes](#) for more information.

You configure Swarm search with the following configuration block in the `SWARM_ROOT/data/config.php` file:

```
<?php
// this block should be a peer of 'p4'
'search' => array(
    'maxlocktime'    => 5000, // 5 seconds, in milliseconds
    'p4_search_host' => '',   // optional URL to Helix Search Tool
),
```

The `maxlocktime` key specifies the maximum amount of time, in milliseconds, that any table within the Helix Server should be locked while performing `fstat` command searching. Increasing this value might allow better search results at the expense of potentially blocking other queries on the Helix Server. Decreasing this value impacts the Helix Server less, but may be insufficient for returning the desired search results.

The `p4_search_host` key specifies the URL to your installed Helix Server Search Tool. When configured, Swarm issues API calls to the Helix Server Search Tool to take advantage of its full content indexing.

Security

There are many strategies for securing a Swarm installation. This section provides guidance on security features Swarm controls, and recommendations for several areas for the system hosting Swarm.

Require login

Important

Prior to Swarm's 2016.1 release, `require_login` defaulted to `false`. For 2016.1 and later releases, the default is `true`.

By default, Swarm prevents anonymous users from viewing any Helix Server resources; users must login to see commits, reviews, etc.

Swarm can be configured to allow anonymous users to access any readable resources (creating or editing resources by anonymous users is not permitted). Add the following configuration block to the `SWARM_ROOT/data/config.php` file, at the same level as the `p4` entry:

```
<?php
    // this block should be a peer of 'p4'
    'security' => array(
        'require_login' => false, // defaults to true
    ),
```

There is one exception: the `/queue/worker` endpoint is available to any user.

Note

Service and operator users are not permitted to login. For more information on these user types, see [User types in *Helix Core Server Administrator Guide: Fundamentals*](#).

Prevent login

When your Helix Server has users that should not be able to log in to Swarm, for example *service* users involved with Helix Server replicas, the `prevent_login` configuration item can be used to prevent successful authentication.

Add or update the following configuration block to the `SWARM_ROOT/data/config.php` file, at the same level as the `p4` entry:

```
<?php
// this block should be a peer of 'p4'
'security' => array(
    'prevent_login' => array(
        'service_user1',
        'service_user2',
    ),
),
```

`prevent_login` defaults to `array()`, which means no users in your Helix Server are prevented from logging into Swarm.

For more information, see [Service users](#) in *Helix Core Server Administrator Guide: Multi-Site Deployment*.

Sessions

Swarm manages logged-in sessions using cookies in the browser, and PHP session storage on the server. Swarm uses reasonable defaults for the cookie and session lifetimes (measured in seconds); when the lifetime is exceeded users need to login again. To specify session lifetimes and garbage collection frequency, add the following configuration block to the `SWARM_ROOT/data/config.php` file, at the same level as the `p4` entry:

```
<?php
// this block should be a peer of 'p4'
'session' => array(
    'cookie_lifetime'           => 0, // 0=expire when browser
closed
    'remembered_cookie_lifetime' => 60*60*24*30, // 30 days
    'gc_maxlifetime'           => 60*60*24*30, // 30 days
    'gc_divisor'                => 100, // 100 user requests
),
```


- **cookie_lifetime**

Optional: Limits the lifetime of session cookies. The default is `0`, which causes the session cookie to expire when the user's browser is closed.

Note

When the **Remember Me** checkbox on the [login dialog](#) is checked, the `remembered_cookie_lifetime` value will be used for `cookie_lifetime`.

- **remembered_cookie_lifetime**

Optional: Limits the lifetime of session cookies when the **Remember Me** checkbox on the [login dialog](#) is checked. The default is `60*60*24*30` seconds (30 days).

- **gc_maxlifetime**

Optional: If a session is inactive for the specified number of seconds, the user is logged out. The default is `60*60*24*30` seconds (30 days). User sessions are stored in `SWARM_ROOT/data/sessions/`.

Note

By default, the user's Perforce ticket expires after 12 hours, which also causes them to be logged out.

- **gc_divisor**

Optional: Sets how often garbage collection is run based on the number of user requests that are made. The setting range is 1 to 100. Garbage collection deletes user session files that are older than the `gc_maxlifetime` setting from `SWARM_ROOT/data/sessions/`.

- **gc_divisor = 100:** Garbage collection runs after every 100th user request. 100 is the default setting.
- **gc_divisor = 1:** Garbage collection runs after every user request.

Important

If your Swarm system has a large number of users, setting `gc_divisor` to a low number can result in performance issues.

X-Frame-Options header

By default, Swarm emits a `X-Frame-Options` HTTP header set to `SAMEORIGIN`. This prevents embedding of the Swarm interface into other web pages, which avoids *click-jacking* attacks.

If your deployment of Swarm needs to be integrated into another web interface, you can adjust the `X-Frame-Options` header by adjusting the `x_frame_options` item within the security configuration block, found in the `SWARM_ROOT/data/config.php` file. For example:

```
<?php
// this block should be a peer of 'p4'
```

```
'security' => array(
    'x_frame_options' => value,
),
),
```

Where value can be one of:

- **'SAMEORIGIN'** - Swarm can only be displayed in a frame hosted on the same domain.
- **'DENY'** - Swarm cannot be displayed in a frame.
- **'ALLOW-FROM URI'** - Swarm can only be displayed in a frame hosted on the specified URI.
- **false** - The **X-Frame-Options** header is not emitted, so Swarm can be embedded without restriction.

For more information on the **X-Frame-Options** header, see [this Mozilla Developer Network article](#).

For more information on click-jacking attacks, see [this Wikipedia article](#).

Disable commit

Swarm provides the ability to commit reviews within the Swarm interface. You may want to disable this capability to prevent reviews from being committed by someone other than the review's author. When disabled, the **Approve and Commit** (and **Commit** if the review is already approved) option is removed from the list of [states](#) available to a code review.

To disable commits, set **disable_commit** to **true** within the reviews item in the `SWARM_ROOT/data/config.php` file. For example:

```
<?php
// this block should be a peer of 'p4'
'reviews' => array(
    'disable_commit' => true,
),
),
```

Restricted Changes

The Helix Server provides two changelist types: **public** (the default), and **restricted**. Swarm honors restricted changelists by preventing access to the changelist, and any associated comments or activity related to the changelist.

If a user has *list*-level privileges to at least one file in the changelist, Swarm allows the user to see the changelist and any of the files they have permission to see.

To prevent unintended disclosures, email notifications for restricted changes are disabled by default. To enable email notifications for restricted changes, set `email_restricted_changes` to `true` within the security item in the `SWARM_ROOT/data/config.php` file. For example:

```
<?php
// this block should be a peer of 'p4'
'security' => array(
    'email_restricted_changes' => true,
),
),
```

Note

When `email_restricted_changes` is set to `true`, email notifications for restricted changes are sent to all interested parties with no permissions screening. These notifications might disclose sensitive information.

Swarm can only report on changes that the configured *admin*-level user has access to. When using restricted changes, we advise that you grant the *Swarmadmin*-level user access to the restricted files and set `require_login = true` to avoid leaking information to unauthenticated users.

Limit adding projects to administrators

Important

For Swarm 2016.1, the configuration item `add_project_admin_only` was moved from the `security` block to the `projects` block, and the item was renamed to `add_admin_only`. The functionality of this configuration item remains unchanged.

If you do not update your `SWARM_ROOT/data/config.php` configuration file, the old configuration for restricting project creation to administrators continues to work.

If you add the new configuration item `add_admin_only` to the `projects` block, it takes precedence over any remaining `add_project_admin_only` setting in the `security` block.

Limit adding projects to members of specific groups

Important

For Swarm 2016.1, the configuration item `add_project_groups` was moved from the `security` block to the `projects` block, and the item was renamed to `add_groups_only`. The functionality of this configuration item remains unchanged.

If you do not update your `SWARM_ROOT/data/config.php` configuration file, the old configuration for restricting project creation to specific groups continues to work.

If you add the new configuration item `add_groups_only` to the `projects` block, it takes precedence over any remaining `add_project_groups` setting in the `security` block.

IP address-based protections emulation

A Helix Server can be configured via *protections* to restrict access to a depot in a variety of ways, including by IP address. As Swarm is a web application acting as a client to the Helix Server, often with *admin*-level privileges, Swarm needs to emulate IP address-based restrictions. It does so by checking the user's IP address and applying any necessary restrictions during operations such as browsing files, viewing file content, viewing and adding comments on files.

Swarm also emulates proxy-based protections, in addition to regular IP-based protections emulation. However, Swarm does not detect whether it is connecting to a Helix Proxy or not; it merely attempts to emulate protections table entries that use proxy syntax.

IP address-based protections emulation is enabled by default. Swarm performs somewhat faster without this emulation; if you do not require them for your Swarm installation these can be disabled by setting the configuration:

```
<?php
    // this block should be a peer of 'p4'
    'security' => array(
        'emulate_ip_protections' => false,
    ),
```

Known limitations

- Notification e-mails for reviews or commits include the list of affected files. Swarm cannot reliably know the IP address used to retrieve that e-mail, and makes no attempt to filter the files and their depot paths nor any details included in the description. However, when a user follows a link from the notification e-mail to a restricted resource, that access is denied.
- Swarm filters comments from activity streams, but any comments created prior to upgrading to the 2013.3 release cannot be filtered and may leak sensitive information.
- Swarm displays a comment count in code the review list, code reviews, jobs, and activity streams, but the count does not account for any comments that may be hidden from the user due to association with files the user is restricted from viewing.
- Should Swarm users connect to Swarm via a proxy or VPN, the protections will generally use the IP address of the proxy/VPN.

- When the user's IP address and Swarm's IP address both have restrictions applied, the user experiences the most constraining of the two IP address-based restrictions; Swarm cannot bypass restrictions applied to itself.
- Swarm performs a variety of operations with *admin*-level privileges, on behalf of a user. Even if the Helix Server has IP-based, or userid-based protections, installed to prevent access to some or most of its versioned data, Swarm typically does have access to this data. Therefore, *Swarm cannot guarantee that no information leakage will occur*, particularly when custom modules are in use, or Swarm source has been customized.

For more information, see "Authorizing Access" in [Helix Core Server Administrator Guide: Fundamentals](#).

Disable system info

Swarm provides a **System Information** page, available to users with *admin* or *super* privileges, which displays information about Helix Server that Swarm is configured to use, as well as PHP information and the Swarm log file.

While this information can be invaluable when communicating with Perforce support engineers, you may wish to prevent disclosure of any system information. The **System Information** page can be disabled for all users by adding the following configuration block to the `SWARM_ROOT/data/config.php` file, at the same level as the `p4` entry:

```
<?php
    // this block should be a peer of 'p4'
    'security' => array(
        'disable_system_info' => true, // defaults to false
    ),
```

Once disabled, the **System Information** link disappears from the [About Swarm](#) dialog, and 403 errors are generated for any attempts to browse to the **System Information** page.

HTTP client options

Swarm permits configuration of options that are passed through to the underlying Zend Framework 2's HTTP client. These options can be used to specify SSL certificate locations, request timeouts, and more, and can be specified globally or per host.

Here is an example configuration:

```
<?php
    // this block should be a peer of 'p4'
    'http_client_options' => array(
        'timeout'          => 5,
```

```

// path to the SSL certificate directory
'sslcapath'    => '',

// the path to a PEM-encoded SSL certificate
'sslcert'     => '',

// the passphrase for the SSL certificate file
'sslpassphrase' => '',

// optional, per-host overrides;
// host as key, array of options as value
'hosts'       => array(
    'jira.example.com' => array(
        'sslcapath'    => '/path/to/certs',
        'sslcert'     => 'jira.pem',
        'sslpassphrase' => 'keep my JIRA secure',
        'timeout'     => 15,
    ),
),
),
),

```

See the [Zend Framework 2's Socket Adapter documentation](#) for more information.

Warning

While it is possible to use a self-signed SSL certificate, adding the configuration to do so disables certificate validity checks, making connections to the configured host less secure. **We strongly recommend against using this configuration option.**

However, if you need to configure continuous integration, deployment, or JIRA connections and those connections must use a self-signed SSL certificate, set the `sslallowselfsigned` item to `true` for the specific host that needs it, as in the following example:

```

<?php
// this block should be a peer of 'p4'
'http_client_options' => array(
    'hosts'           => array(
        'jira.example.com' => array(
            'sslallowselfsigned' => true,
        ),
    ),
),

```

```
    ),
  ),
```

Strict HTTPS

To improve the security when users work with Swarm, particularly if they need to do so outside of your network, Swarm provides a mechanism that tries to force web browsers to use HTTPS. When enabled, Swarm's behavior changes in the following ways:

- HTTP requests to Swarm include a meta-refresh to the HTTPS version. If a load balancer handles encryption before requests reach Swarm, the meta-refresh should be disabled. See [below](#).
- A strict transport security header is included for all requests, which pins the browser to using HTTPS for your Swarm installation for 30 days.
- All qualified URLs that Swarm produces use HTTPS for the scheme.
- Cookies are flagged as HTTPS-only.

Here is an example of how to enable strict HTTPS:

```
<?php
    // this block should be a peer of 'p4'
    'security' => array(
        'https_strict'           => true,
        'https_strict_redirect' => true, // optional; set false to avoid
meta-refresh
        'https_port'           => null, // optional; specify if HTTPS is
                                // configured on a non-standard
port
    ),
```

When the `https_strict_redirect` item is set to `false`, Swarm does not add a meta-refresh for HTTP clients. This prevents an endless redirect when a load balancer in front of Swarm applies HTTPS to the client-to-load balancer connection, but not the load balancer-to-Swarm connection.

Apache security

There are several Apache configuration changes that can improve security for Swarm:

- **Disable identification**

By default, each Apache response to a web request includes a list of tokens identifying Apache and its version, along with any installed modules and their versions. Also, Apache can add a signature line to each response it generates that includes similar information. By itself, this identification information is not a security risk, but it helps would-be attackers select attacks that could be successful.

To disable Apache identification, add the following two lines to your Apache configuration:

```
ServerSignature Off
ServerTokens ProductOnly
```

- **Disable TRACE requests**

TRACE requests cause Apache to respond with all of the information it has received, which is useful in a debugging environment. **TRACE** can be tricked into divulging cookie information, which could compromise the credentials being used to login to Swarm.

To disable **TRACE** requests, add the following line to your Apache configuration:

```
TraceEnable off
```

- **Update SSL configuration**

Swarm works correctly with an SSL-enabled Apache. Several attacks on common SSL configurations have been published recently. We recommend that you update your Apache configuration with the following lines:

```
<IfModule mod_ssl.c>
    SSLHonorCipherOrder On
    SSLCipherSuite ECDHE-RSA-AES128-SHA256:AES128-GCM-
    SHA256:RC4:HIGH:!MD5:!aNULL:!EDH
    SSLCompression Off
</IfModule>
```

PHP security

There are several PHP configuration changes that can improve security for Swarm:

- **Disable identification**

By default, PHP provides information to Apache that identifies that it is participating in a web request, including its version.

To disable PHP identification, edit your system's `php.ini` file and change the line setting `expose_php` to:

```
expose_php = Off
```


■ Remove scripts containing `phpinfo()`

During module development or other debugging, you may need to call `phpinfo()`, which displays PHP's active configuration, compilation details, included modules and their configuration. Typically, you would add a script to Swarm's public directory containing:

```
<?php phpinfo() ?>
```

Any such scripts should be removed from a production instance of Swarm.

Short links

Short links work with your Swarm installation's current hostname, but you have the option of registering/configuring an even shorter hostname to make shareable file/directory links as short as possible.

1. Register a short domain name, or if you control your own DNS server, a short domain name for your network.
2. Point the short domain name at your Swarm host.
3. Edit the `SWARM_ROOT/data/config.php` file and add the following configuration block:

```
<?php
// this block should be a peer of 'p4'
'short_links' => array(
    'hostname' => 'myho.st',
),
```

Replace `myho.st` with the short domain name you registered/configured.

If your Swarm is configured to use **HTTPS**, a **custom port**, a **sub-folder**, or any combination of these custom installation options, the short links configuration block should look like:

```
<?php
// this block should be a peer of 'p4'
'short_links' => array(
    'external_url' => 'https://myho.st:port/sub-folder',
),
```

Replace `myho.st` with the short domain name you have registered/configured.

If you have not configured Swarm to use HTTPS, replace `https://` with `http://`.

If you have configured Swarm to run on a custom port, replace `:port` with the correct custom port. Otherwise, remove `:port`.

If you have configured Swarm to run in a sub-folder, replace `/sub-folder` with the correct sub-folder name. Otherwise, remove `/sub-folder`.

Important

The `external_url` configuration item is only honored if you have also configured the `external_url` on page 385 item within the `Environment` on page 384 configuration item as well. Otherwise, Swarm could generate short links that cannot correctly link to their corresponding full URLs.

When `external_url` is configured, the `hostname` configuration item is ignored.

swarm_root

`swarm_root` refers to the directory where Swarm lives in the filesystem. Depending on how you installed Swarm, the default location could be:

- For a package or OVA installation: `/opt/perforce/swarm`
- For a tarball installation: wherever you unpacked Swarm. If you are unsure, you could check your web server's configuration to discover where Swarm exists.

System Information

The System Information page is available to users with `admin` or `super` privileges on the [About Swarm](#) dialog. Click the **System Information** link on the dialog to display the System Information page.

The System Information page provides details that can be useful to Perforce support engineers when you ask them for assistance.

System Information

Perforce		Log	PHP Info
User Name	admin		
Client Name	*unknown*		
Client Cwd	/		
Client Host	swarm-deploy		
Peer Address	127.0.0.1:56220		
Client Address	127.0.0.1		
Server Address	localhost:4433		
Server Root	/opt/perforce/servers/master		
Server Date	2018/04/27 07:02:59 -0700 PDT		
Server Uptime	242:13:25		
Server Version	P4D/LINUX26X86_64/2018.1/1637071 (2018/03/23)		
Server Services	standard		
Server License	none		
Case Handling	sensitive		

The initial display is the **Perforce** tab, which provides information similar to the `p4 info` command.

Log

Click the **Log** tab to display the most recent entries, up to 1 megabyte, in Swarm's log file, which resides in `SWARM_ROOT/data/log`. Review the logging levels for [Swarm logs](#) to ensure that the entries you want to see are included.

System Information

📁 Performe
📁 Log
📁 PHP Info

🔄 Refresh Log
📄 Download Log

Time	Severity	Message
less than a minute ago	DEBUG	P4 (00000000113d9a7400007fdf77dd5fcc) start command: login -s
less than a minute ago	DEBUG	P4 (0000000053cebb0800007fdf421eaa33) start command: login -s
less than a minute ago	DEBUG	Worker 2 idle. No tasks in queue.
less than a minute ago	DEBUG	P4 (00000000140d5ab900007fdf62993611) start command: spec -o user
less than a minute ago	DEBUG	P4 (00000000140d5ab900007fdf62993611) start command: info
less than a minute ago	DEBUG	P4 (00000000140d5ab900007fdf62993611) start command: counters -u -e swarm-cache-*
less than a minute ago	DEBUG	P4 (00000000140d596400007fdf62993611) start command: info
less than a minute ago	DEBUG	P4 (00000000140d596400007fdf62993611) start command: login -s

Click the **Refresh Log** button to load the latest log entries, up to 1 megabyte.

Click the **Download Log** button to download the log and all of its log entries.

If your log entries include a critical error, an arrow appears:

▶ 14 minutes ago **CRIT** exception 'P4\Connection\Exception\CommandException' with message 'Command failed: Partner exited unexpectedly.' in /web/apps/swarm/library/P4/Connection/AbstractConnection.php:986

Click the error to display the stack trace that accompanies the error:

▼ 15 minutes ago **CRIT** exception 'P4\Connection\Exception\CommandException' with message 'Command failed: Partner exited unexpectedly.' in /web/apps/swarm/library/P4/Connection/AbstractConnection.php:986

Stack trace:


```
#0 library/P4/Connection/AbstractConnection.php(711): P4\Connection\AbstractConnection->handleError(Object(P4\Connection\CommandResult))
#1 library/Record/Cache/Cache.php(240): P4\Connection\AbstractConnection->run('counters', Array)
#2 library/Record/Cache/Cache.php(221): Record\Cache\Cache->getCounters()
#3 library/Record/Cache/Cache.php(200): Record\Cache\Cache->getCounter('groups')
#4 module/Application/Module.php(160): Record\Cache\Cache->removeInvalidatedFiles()
#5 [internal function]: Application\Module->Application\{closure}(Object(Zend\EventManager\Event))
```

PHP Info

Click the **PHP Info** tab to display PHP's own information display generated by executing `phpinfo()`, PHP's internal diagnostic display.

System Information

[Perforce](#)
[Log](#)
[PHP Info](#)

PHP Version 5.6.11-1ubuntu0.16.04.1	
	
System	Linux swarm.internal 4.2.0-35-generic #40-Ubuntu SMP Tue Mar 15 22:15:45 UTC 2016 x86_64
Server API	Apache 2.0 Handler
Virtual Directory Support	disabled
Configuration File (php.ini) Path	/etc/php5/apache2
Loaded Configuration File	/etc/php5/apache2/php.ini
Scan this dir for additional .ini files	/etc/php5/apache2/conf.d
Additional .ini files parsed	/etc/php5/apache2/conf.d/05-opcache.ini, /etc/php5/apache2/conf.d/10-pdo.ini, /etc/php5/apache2/conf.d/20-curl.ini, /etc/php5/apache2/conf.d/20-gd.ini, /etc/php5/apache2/conf.d/20-imagick.ini, /etc/php5/apache2/conf.d/20-intl.ini, /etc/php5/apache2/conf.d/20-json.ini, /etc/php5/apache2/conf.d/20-mysql.ini, /etc/php5/apache2/conf.d/20-mysqli.ini, /etc/php5/apache2/conf.d/20-pdo_mysql.ini, /etc/php5/apache2/conf.d/20-pdo_sqlite.ini, /etc/php5/apache2/conf.d/20-readline.ini, /etc/php5/apache2/conf.d/20-sqlite3.ini, /etc/php5/apache2/conf.d/25-p4php.ini
PHP API	20131106
PHP Extension	20131226
Zend Extension	220131226
Zend Extension Build	API220131226,NTS
PHP Extension Build	API20131226,NTS
Debug Build	no
Thread Safety	disabled
Zend Signal Handling	disabled

Trigger options

The Swarm trigger script, `swarm-trigger.pl`, provides the following command line options and configuration items.

Command-line options

Synopsis

```
swarm-trigger.pl -t type -v ID [-c config_file]
```

```
swarm-trigger.pl -o
```

```
swarm-trigger.pl -h
```

Informational options

The following options perform no processing, and simply provide information useful to a Swarm administrator. These are not intended to be used within trigger entries in the Helix Server.

- **-h**

Displays a list of the available options, some guidance on its usage, and a copy of the trigger table entries that should be configured in the Helix Server to execute the script in its current path.

- **-o**

Displays a copy of the trigger table entries that should be configured in the Helix Server to execute the script in its current path.

Operational options

The following command-line options are used in the trigger table entries in the Helix Server to specify how the Swarm trigger script should be executed.

- **-t *type***

Specifies the type of processing that the trigger script undertakes. ***type*** can be one of:

- **job**: this type should be used with Helix Server **form-commit** events for job forms, and informs Swarm when a job is created or modified.
- **user**: this type should be used with Helix Server **form-commit** events for user forms, which informs Swarm when a user is added or modified.
- **userdel**: this type should be used with Helix Server **form-delete** events for user forms, which informs Swarm when a user is deleted.
- **group**: this type should be used with Helix Server **form-commit** events for group forms, and informs Swarm when a group is created or modified.
- **groupdel**: this type should be used with Helix Server **form-delete** events for group forms, and informs Swarm when a group is deleted.
- **changesave**: this type should be used with Helix Server **form-save** events for change forms, and informs Swarm when a changelist is created or modified.
- **shelve**: this type should be used with Helix Server **shelve-commit** events, and informs Swarm when a changelist is shelved, which can create or update a review.
- **commit**: this type should be used with Helix Server **change-commit** events, and informs Swarm when a changelist is committed.
- **shelvedel**: this type is used with Helix Server **shelve-delete** events, and informs Swarm when a file is deleted from a shelf.

Important

Do not use the Swarm user that is configured in the [Swarm configuration file](#) when deleting shelves, or deleting files from shelves. The Swarm logic processes the *shelve-delete* trigger event, if the event is invoked by the Swarm user it is rejected. The delete operations will fail.

- **enforce** (this trigger must be commented out if the Workflow technology preview feature is enabled): this type is used to verify that commits to specific depot paths are associated with approved reviews. If a commit includes a file within the specified depot path, and it is not associated with a review (or a review that is not approved), the commit is rejected.

Using the **enforce** type prevents users from committing changes to specific depot paths without those changes being reviewed and approved.

- **strict** (this trigger must be commented out if the Workflow technology preview feature is enabled): this type is used to verify that the file content in a commit matches the file content of its associated approved review. If one or more files in a commit do not match the content of the file in its associated review, the commit is rejected.

Using the **strict** type prevents users from making changes to the file content after a review has been approved and then submitting the unapproved changes.

Note

strict implies **enforce**.

- **Workflow trigger types** (only use if the Workflow technical preview feature is enabled. If the Workflow technology preview feature is disabled these triggers must be commented out. The **enforce** and **strict** triggers above must be commented out if the Workflow feature is enabled):

Important

Trigger types **checkenforced**, **checkstrict**, and **checkshelve** were introduced in Swarm 2018.2 for the Workflow technology preview feature.

Known limitations

The workflow triggers do not support the following trigger functionality available in Swarm 2018.1 and earlier:

- **-g group**: Specifies a group to exclude from **enforce** or **strict** verifications. Members of the group (including sub-groups) are not subject to **enforce** or **strict** verifications.
- **EXEMPT_FILE_COUNT**: When set to a positive integer, commits with a file count greater or equal to this value are exempt from **enforce** or **strict** verifications.
- **EXEMPT_EXTENSIONS**: A comma separated list of file extension. Commits with files having only these extensions are exempt from **enforce** or **strict** verifications.

To continue to use this functionality, you must keep your existing **enforce** and **strict** triggers and leave the [Workflow technology feature disabled](#).

The following trigger types are used by Swarm for workflow rules. They are not intended for use in custom trigger scripts.

- **checkenforced**: this type is used by the Swarm `with_review` workflow rule and cannot be configured. `checkenforced` triggers on a Helix Server `change-submit` event.

If a commit is made to a branch that has `with_review` set to `strict`, and it is not associated with a review (or the review is not approved), the commit is rejected. If the commit is associated with an approved review, a content check is carried out by `checkstrict`.

- **checkstrict**: this type is used by the Swarm `with_review` workflow rule and cannot be configured. `checkstrict` triggers on a Helix Server `change-content` event.

This check is performed after `checkenforced`. If the `with_review` rule is set to `strict`, and one or more files in a commit do not match the content of the file in its associated review, the commit is rejected.

- **checkshelve**: this type is used by the Swarm `end_rules` workflow rule and cannot be configured. `checkshelve` triggers on a Helix Server `shelve-submit` event.

If a shelf is associated with a review, and it is committed to a branch that has `end_rules` set to `no_revision`, Swarm checks what state the review is in to make sure it is not in a `protected state`. If the review is in a protected state, the commit is rejected.

Important

You cannot mix Swarm trigger types with unrelated Helix Server events; the behavior is undetermined, and the information required for each type of processing may not be available to the trigger.

■ `-v ID`

Specifies `ID`, which is the identifier for the current trigger type.

When the `type` is `job`, `user`, `userdel`, `group`, `groupdel`, or `changesave`, `ID` should be `%formname%` to specify the specific form identifier Swarm should process.

When the `type` is `shelve`, `commit`, `shelvedel`, `checkenforced`, `checkstrict`, or `checkshelve` `ID` should be `%change%` to specify the specific changelist Swarm should process.

■ `-p port (optional)` Do not use if the Workflow technology preview feature is enabled:

Specifies the Helix Server port (`P4PORT`). This value is optional, and is only used for types `enforce` or `strict` as the trigger has to run its own commands against the Helix Server during its processing.

- **-r (optional)** Do not use if the Workflow technology preview feature is enabled:
Specifies that, when types `enforce` or `strict` are being processed, the verifications should only be performed on commits that are currently in review.
- **-g (optional)** Do not use if the Workflow technology preview feature is enabled:
Specifies a `group` to exclude from `enforce` or `strict` verifications. Members of the group (including sub-groups) are not subject to `enforce` or `strict` verifications.
- **-c `config_file` (optional)**
Specifies an optional `config_file` which is used to specify configuration items.

Configuration items

The following configuration items are used in the `swarm-trigger.conf` (or another file, if the `-c` option is used in the trigger entries).

- **SWARM_HOST (required)**
Specifies the host URL of your Swarm instance, with the leading `http://` or `https://`. For example: `https://myswarm.url`
- **SWARM_TOKEN (required)**
A token used when talking to Swarm. To obtain the token, log into Swarm as a user with *super* privileges and select "About Swarm" on page 244 from the user menu in the main navigation bar.
You can also manually create additional tokens. Tokens are empty files stored within `SWARM_ROOT/data/queue/tokens` (the filename is the token and is reported on the **About Swarm** dialog), that should be readable by the web server.
You might manually create additional tokens to allow other processes to talk to Swarm, such as JIRA build tasks, and to selectively invalidate access to Swarm without interfering with regular Swarm operations.
- **ADMIN_USER (optional)** Do not use if the Workflow technology preview feature is enabled:
When `enforce` or `strict` verifications are to be performed, you may need specify a username of a user in the Helix Server that has *admin* privileges. If you do not specify a username, the trigger script uses the Helix Server user set in the environment.

- **ADMIN_TICKET_FILE (optional)** Do not use if the Workflow technology preview feature is enabled:

When `enforce` or `strict` verifications are to be performed, you may need specify the path to the `.p4tickets` file, if your Helix Server tickets file is not the default `$HOME/.p4tickets`.

Important

Ensure that the ticket belongs to a user with *admin* privileges in the Helix Server, and is a member of a group with an `unlimited` or very long ticket timeout. If this user's authentication times out, `enforce` and `strict` verifications stop working.

- **P4_PORT (optional)** Do not use if the Workflow technology preview feature is enabled:
When `enforce` or `strict` verifications are to be performed, you may need to set the port value (`P4PORT`) of the Helix Server, particularly if the Helix Server is on a non-standard port, or if the Helix Server is not using the default hostname.
- **P4 (optional)** Do not use if the Workflow technology preview feature is enabled:
Specifies the full path to `p4`, the Helix Server command-line client. This is only required when `p4` is not found in the `PATH` of the Helix Server environment, and when `enforce` or `strict` verifications are to be performed.
- **EXEMPT_FILE_COUNT (optional)** Do not use if the Workflow technology preview feature is enabled:
When set to a positive integer, commits with a file count greater or equal to this value are exempt from `enforce` or `strict` verifications.
- **EXEMPT_EXTENSIONS (optional)** Do not use if the Workflow technology preview feature is enabled:
A comma-separated list of file extensions. Commits with files having only these extensions are exempt from `enforce` or `strict` verifications.
- **VERIFY_SSL (optional)**
If HTTPS is used on the Swarm web server, this controls whether the SSL certificate is validated or not.
By default `VERIFY_SSL` is set to `1`, this means any SSL certificates must be valid. If the Swarm web server is using a self signed certificate, `VERIFY_SSL` must be set to `0`.
- **TIMEOUT (optional)**
Sets the number of seconds to wait before returning an error when communicating with the Swarm server.
The default setting is `30` seconds.

■ **IGNORE_TIMEOUT (optional)**

Configure the action to take if communication with the Swarm server times out. For example, if you are submitting a large number of files to the Helix Server.

Options are:

- **0** if communication with the Swarm server times out, the submit will fail. This is the default setting.
- **1** if communication with the Swarm server times out, the submit will continue. This increases the reliability of submits.

■ **IGNORE_NOSEVER (optional)**

Configure the action to take if communication with the Swarm server fails. For example, the Swarm server is down.

Options are:

- **0** if communication with the Swarm server fails, the submit will fail. This is the default setting.
- **1** if communication with the Swarm server fails, the submit will continue. This increases the reliability of submits.

Unapprove modified reviews

By default, when an approved review is committed or updated, Swarm changes the state to **Needs Review** if the files have been modified since the review was approved.

If one or more files in a review has the filetype +k (**ktext**), this behavior is undesirable because the files will appear to be modified as the Helix Server replaces RCS keywords with their current values.

This behavior can be disabled. Edit the `SWARM_ROOT/data/config.php` file, and add or update the `unapprove_modified` item to `false`, within the reviews configuration block. For example:

```
<?php
// this block should be a peer of 'p4'
'reviews' => array(
    'unapprove_modified' => false,
),
```

For for information on file types, see "File Types" in [P4 Command Reference](#).

Uninstall Swarm

This section covers the steps required to uninstall Swarm.

Background

The bulk of Swarm's metadata (activity, comments, review records, followers) is stored in p4 keys under **swarm-***. If you are using a 2012.1+ server, Swarm also defines user groups for each project that you define. The names of these groups correspond 1-to-1 with projects, for example **swarm-project-fantastico**. Swarm manages a pool of client workspaces that it uses to shelve and commit files. These clients are named **swarm-{uuid}**, for example **swarm-5ad4a9c0-06e7-20eb-897f-cbd4cc934295**.

Uninstall steps

1. Uninstall the Swarm triggers.
2. Remove your web server's virtual host configuration for Swarm.
3. Restart your web server.
4. Delete groups/clients/keys that are prefixed with **swarm-***.

Note

The clients could contain shelved files for reviews. Determine how you want to handle those files prior to deleting the clients.

5. Additional indexed information is stored in the database file **db.ixtext**. Unfortunately, indexed jobs and other generic indexed information would be lost if this table was simply removed, and modifying the database file can be a dangerous operation in a number of Helix Server deployment scenarios.

Important

Contact Perforce support for assistance if you feel the need to remove Swarm's indexed information: support@perforce.com.

6. Rebuild the job index. The best approach is to run:

```
$ p4 jobs -R
```

which rebuilds the **db.ixtext** table. There are two caveats that likely require discussion with support@perforce.com:

- If you make use of the unsupported **p4 index** command, you **cannot** use this approach, as it would remove all of your indexes.
- If you have indexing turned on for the domain table, you must also run:

```
$ p4d -xf index.domain.owner
```

7. If the `P4.Swarm.URL` or `P4.Swarm.CommitURL` properties were set (for details, see "Client integration" on page 365 and "Commit-edge deployment" on page 370 respectively), they should be unset to prevent P4V (and potentially other clients) from attempting Swarm operations:

```
$ p4 property -d -n P4.Swarm.URL
$ p4 property -d -n P4.Swarm.CommitURL
```

If the `P4.Swarm.URL` or `P4.Swarm.CommitURL` properties were set using sequence numbers, you need to add the `-sN` flag to the commands, where `N` is a sequence number.

To discover all of the definitions of the `P4.Swarm.*` properties and their sequence numbers, run the command:

```
$ p4 property -Al | grep P4.Swarm
P4.Swarm.CommitURL = https://myswarm.url/ (any) #none
P4.Swarm.CommitURL = https://myswarm1.url/ (any) #1
P4.Swarm.URL = https://myswarm.url/ (any) #none
P4.Swarm.URL = https://myswarm3.url/ (any) #3
P4.Swarm.URL = https://myswarm2.url/ (any) #2
P4.Swarm.URL = https://myswarm1.url/ (any) #1
```

To delete all of these property definitions, you would run the following commands:

```
$ p4 property -d -n P4.Swarm.URL
$ p4 property -d -n P4.Swarm.URL -s1
$ p4 property -d -n P4.Swarm.URL -s2
$ p4 property -d -n P4.Swarm.URL -s3
$ p4 property -d -n P4.Swarm.CommitURL
$ p4 property -d -n P4.Swarm.CommitURL -s1
```

Upgrade index

The Swarm [Upgrade index](#) process can be configured to suit the performance of your Swarm system via the following config items.

Note

If you are upgrading from Swarm version 2017.3 or later, the index upgrade step is not required.

`status_refresh_interval`

The `status_refresh_interval` sets the refresh rate of the index upgrade status page. The default is 10 seconds.

```
<?php
// this block should be a peer of 'p4'
'upgrade' => array(
    'status_refresh_interval' => 10, //Refresh page every 10 seconds
),
```

batch_size

The `batch_size` sets the number of reviews held in memory and processed for each batch. This value can be increased or decreased depending on your Swarm machines system memory. The default is 1000 reviews.

For example:

If the Swarm machine does not have a lot of memory, for instance 128MB, a `batch_size` of 1000 might be too high and may make the upgrade run very slowly. In this instance reduce the `batch_size` to a more manageable size.

```
<?php
// this block should be a peer of 'p4'
'upgrade' => array(
    'batch_size' => 1000, //Fetch 1000 reviews to lower memory usage
),
```

Users

This section provides information on how to configure the default review and time preferences for users. The user preference settings are used for a user until they change their user preferences, see [user profile Settings](#).

Review preferences

The review preferences configure the default way that [diffs](#) are initially displayed to users when they view them in changelists and code reviews. The review preference settings are used for a user until they change their user preferences, see [user profile Settings](#).

Configure the default user diff view settings with the following configuration block in the `SWARM_ROOT/data/config.php` file:

```
<?php
// this block should be a peer of 'p4'
'users' => array(
    'settings' => array(
        'review_preferences' => array(
```

```

        'show_comments_in_files'           => true,
        'view_diffs_side_by_side'         => true,
        'show_space_and_new_line_characters' => false,
        'ignore_whitespace'               => false,
    ),
),
),

```

show_comments_in_files:

- **true**: display comments in files and in the **Comments** tab. This is the default value.
- **false**: display comments only in the **Comments** tab.

view_diffs_side_by_side:

- **true**: display diffs in files side by side in two panes. This is the default value.
- **false**: display diffs in files inline in a single pane.

show_space_and_new_line_characters:

- **true**: display whitespace characters as dots, tabs as arrows that point to a bar, and line endings as arrows that point down.
- **false**: whitespace, tabs and line endings are not displayed as special characters. This is the default value.

ignore_whitespace:

- **false**: changes made to whitespace are highlighted in file diffs. This makes it easier to identify changes in file types where whitespace is important. This is the default value.
- **true**: changes made to whitespace are not highlighted in file diffs. This makes it easier to see the important changes in file types where whitespace changes are not important.

Note

ignore_whitespace replaces **ignore_whitespace_default** that was used in Swarm version 2017.4 and earlier. By default **ignore_whitespace** is set to false, this is the same original default value set for **ignore_whitespace_default**.

Time preferences

The time preferences configure the default way that time is initially displayed to users. The time preference settings are used for a user until they change their user preferences, see user profile [Settings](#).

Configure the default user time settings with the following configuration block in the `SWARM_ROOT/data/config.php` file:

```

<?php
    // this block should be a peer of 'p4'

```

```

    'users' => array(
      'settings' => array(
        'time_preferences' => array(
          'display' => 'Timeago', // Default to 'Timeago' but can
be set to 'Timestamp'
        ),
      ),
    ),
  ),
),

```

display:

- **'Timeago'**: time is displayed as how long ago the event happened. This is the default value.
- **'Timestamp'**: time is displayed as the date and time the event happened using the local machine browser time.

Tip

If timestamp is selected, the date format used by Swarm matches the date format configuration of the local machine browser.

Workers

Helix Swarm uses background processes, called *workers*, to respond to events in the Helix Server. The default number of workers is 3, and each worker processes events for up to 10 minutes. When a worker terminates, a new one is spawned.

Note

Each worker maintains a connection to the Helix Server for the duration of its lifetime. This may impact your Helix Server management practices.

Worker status

To determine the current status of workers, visit the URL:

<https://myswarm.url/queue/status>


The response is formatted in JSON, and looks like this:

```

{"tasks":0,"futureTasks":1,"workers":3,"maxWorkers":3,"workerLifetime":"59
5s"}

```

During normal use of Swarm, the following error message appears for logged-in users when Swarm detects that no workers are running:



Worker configuration

To adjust the configuration for workers, add a configuration block to the `SWARM_ROOT/data/config.php` file:

```
<?php
// this block should be a peer of 'p4'
'queue' => array(
    'workers'           => 3,    // defaults to 3
    'worker_lifetime'  => 595,  // defaults to 10 minutes (less 5
seconds)
    'worker_task_timeout' => 1800, // defaults to 30 minutes
    'worker_memory_limit' => '1G', // defaults to 1 gigabyte
),
```

where:

- **workers** specifies the number of worker processes that should be available. The default is 3. The `cron job` ensures that new worker processes are started when necessary. If the limit is reached or exceeded, new worker processes are not started.
- **worker_lifetime** specifies the amount of time in seconds that a worker process should run for. The default is 595 seconds (10 minutes less 5 seconds). If a worker process exceeds this limit while processing a task, it will complete the active task and then terminate. **worker_lifetime** does not cause tasks to terminate mid-processing.
- **worker_task_timeout** specifies the maximum amount of time in seconds that a worker process can spend processing a single task. The default is 1800 seconds (30 minutes). This is useful for terminating workers that might get stalled in a variety of situations.
- **worker_memory_limit** specifies the maximum amount of memory that a worker process is allowed to use while processing a task. The default is 1G (1 gigabyte).

Manually start workers

To kick off a new worker process, visit the URL: `https://myswarm.url/queue/worker`

When the number of workers running matches the configured limit, the requested worker process is not started.

Note

This technique does start a worker, but it lasts only for its configured lifetime. Typically, you would always want at least one worker running. See "Set up a recurring task to spawn workers" on page 143 for details.

Manually restart workers

To restart an idle worker process, remove its lock file:

```
rm data/queue/workers/worker_id
```

A worker process that is busy processing a task will continue operation until its task is complete. Immediately afterwards, if the worker notices that its lock file is missing it exits.

If you have a recurring task to start workers, the recurring task starts a fresh worker, if necessary. See "Set up a recurring task to spawn workers" on page 143 for details.

Workflow global rules - Technology preview feature

Warning

Workflow is a [technology preview feature](#) and is disabled by default.

This section provides information on how to enable workflow and configure the global workflow rules for Swarm.

Each global workflow rule has a mode setting, this determines how that rule is used by Swarm:

- **Default mode:** applies the workflow rule setting to projects and project branches that don't have an associated [workflow](#). If a project or project branch has an associated Swarm workflow, the global rule is ignored.
- **Policy mode:** applies a minimum workflow rule setting to all projects and project branches. If a project or project branch has an associated [workflow](#), the global rule is merged with the workflow rule and the most restrictive setting is used.

Important

- Changes to global workflow rules that are set to **default** mode will change the workflow for projects and project branches that do not have an associated workflow.
- Changes to global workflow rules that are set to **policy** mode will change the workflow for all projects and project branches.

Configure the global workflow rules with the following configuration block in the [SWARM_ROOT/data/config.php](#) file:

```
<?php
// this block should be a peer of 'p4'
```

```
'workflow' => array(
    'enabled' => false, // Switches the workflow feature on. Workflow
is a technology preview feature, it is currently unsupported and not
suitable for production. Default is false
),
'workflow_rules' => array(
    'on_submit' => array(
        'with_review' => array(
            'rule' => 'no_checking', // 'no_checking|strict'
            'mode' => 'default' // 'policy|default'
        ),
        'without_review' => array(
            'rule' => 'no_checking', // 'no_checking|auto_
create|reject'
            'mode' => 'default' // 'policy|default'
        ),
    ),
),
'end_rules' => array(
    'update' => array(
        'rule' => 'no_checking', // 'no_checking|no_revision'
        'mode' => 'default' // 'policy|default'
    ),
),
'counted_votes' => array(
    'rule' => 'anyone', // 'anyone|members'
    'mode' => 'default' // 'policy|default'
),
'auto_approve' => array(
    'rule' => 'never', // 'never|votes'
    'mode' => 'default' // 'policy|default'
),
),
```

workflow

Warning

Workflow is a technology preview feature and is disabled by default.

Technology preview features:

Technology Preview features are currently unsupported, might not be functionally complete, and are not suitable for deployment in production. Technology preview features are subject to change and may be removed before they become fully supported features.

These features are provided to the customer to solicit interest and feedback, with the goal of full support in future releases. Customers are encouraged to provide feedback and functionality suggestions for Technology Preview features before they become fully supported.

To enable the workflow feature, edit the `SWARM_ROOT/data/config.php` file and set the `enabled` configurable to `true` in the `workflow` section of the codeblock:

```
'workflow' => array(
    'enabled' => false, // Switches the workflow feature on. Workflow
    is a technology preview feature, it is currently unsupported and not
    suitable for production. Default is false
),
```

The default value is `false`.

with_review

`with_review`: applied when:

- A Swarm review is committed.
- A changelist with an associated review is submitted from outside of Swarm.

Tip

The `with_review` rule is also applied when a changelist is submitted with `#review-nnnnn`, `#replace-nnnnn`, or `#append-nnnnn` in the description (**nnnnn** = review ID). For more information about adding a changelist to a review by including a keyword in the changelist description, see ["Add a changelist to a review" on page 406](#).

- `rule`: choose one of the following options:
 - `no_checking`: the changelist review state is not checked. The changelist is committed even if its associated review is not approved. This is the default rule.

- **strict**: the changelist review state is checked to see if the review is in an approved state (check performed during the **change-submit** trigger event). A further check is made to see if the content of the changelist is identical to the content of the approved review (check performed during the **change-content** trigger event).
 - Review is approved and changelist content is identical to the approved review: the changelist is submitted.
 - Review is approved and the changelist content is not identical to the approved review: the changelist submit is rejected.
 - Review is not approved: the changelist submit is rejected.
- **mode**: choose one of the following options:
 - **default**: the rule is only applied to a project or project branch that does not have an associated workflow. This is the default mode.
 - **policy**: the rule is applied to all projects and project branches even if there is an associated workflow.

without_review

without_review: applied when a changelist without an associated review is submitted from outside of Swarm.

Tip

The **without_review** rule is also applied when a changelist is submitted with **#review** in the description. For more information about creating a review by including a keyword in the changelist description, see ["Create a review" on page 406](#).

- **rule**: choose one of the following options:
 - **no_checking**: the changelist is not checked, the changelist is submitted without a review. This is the default rule.
 - **auto_create**: the changelist is submitted and a review is created automatically for the changelist.
 - **reject**: the changelist submit is rejected.
- **mode**: choose one of the following options:
 - **default**: the rule is only applied to a project or project branch that does not have an associated workflow. This is the default mode.
 - **policy**: the rule is applied to all projects and project branches even if there is an associated workflow.

end_rules

By default, you can update the content of a review no matter what state the review is in. Reviews can be protected from content change if they are in a specified state by using the `end_states` configurable.

The `end_states` configurable sets the protected review states.

`update`: applied when a changelist is added to a review.

- `rule`: choose one of the following options:
 - `no_checking`: the review is not checked, the changelist is added to the review no matter what the review state is. This is the default setting.
 - `no_revision`: if the review is in one of the states specified in the `end_state` configurable (check performed during the `shelve-submit`, and `change-submit` trigger events):
 - The **Add Change** button is disabled for the review.
 - The changelist is rejected if it is added outside of Swarm by adding `#review-nnnnn`, `#replace-nnnnn`, or `#append-nnnnn` in the changelist description (`nnnnn` = review ID).
- `mode`: choose one of the following options:
 - `default`: the rule is only applied to a project or project branch that does not have an associated workflow. This is the default mode.
 - `policy`: the rule is applied to all projects and project branches even if there is an associated workflow.

counted_votes

By default, all of the up votes on a review are counted for the **Minimum up votes** value set on the project/branch the review is associated with. Limit the up votes that are counted to just the members of the project the review is associated with by using this rule.

`counted_votes`: applied when a user votes on a review.

- `rule`: choose one of the following options:
 - `anyone`: votes are counted for all reviewers on a review. This is the default setting.
 - `members`: only the up votes of members of the project the review is associated with are counted for the **Minimum up votes** set on projects/branches.
- `mode`: choose one of the following options:
 - `default`: the rule is only applied to a project or project branch that does not have an associated workflow. This is the default mode.
 - `policy`: the rule is applied to all projects and project branches even if there is an associated workflow.

Tip

For instructions on how to set **Minimum up votes** for projects and branches, see [Project minimum up votes](#) and [Branch minimum up votes](#).

auto_approve

By default, reviews must be manually approved. Enable automatic approval of reviews with this rule.

auto_approve: applied when a user votes on a review, a required reviewer is added to a review, or a required reviewer is made an optional reviewer on a review.

- **rule**: choose one of the following options:
 - **never**: reviews are not automatically approved. This is the default setting.
 - **votes**: reviews are automatically approved if:
 - There are no down votes on the review.
 - There are no moderators on the review. If a review has moderators it cannot be automatically approved.
 - All of the [Required reviewers](#) on the review have voted up.
 - The **Minimum up votes** on the review has been satisfied for **each** of the projects and branches the review spans.

Important

Moderators prevent the automatic approval of reviews. For more information about moderators, see ["Moderators" on page 291](#).

Tip

After a review has been automatically approved it needs to be manually committed.

- **mode**: choose one of the following options:
 - **default**: the rule is only applied to a project or project branch that does not have an associated workflow. This is the default mode.
 - **policy**: the rule is applied to all projects and project branches even if there is an associated workflow.

12 | Extending Swarm

Helix Swarm is built with open source technologies, using modern development methods, resulting in a platform that is capable, modular, and can be extended in a variety of ways. While this section is currently incomplete, it does identify the technologies that make up Swarm and provides notes regarding some of the available extension points.

Resources	451
Development mode	452
Modules	453
Example linkify module	454
Example email module	457
CSS & JavaScript	465

Resources

Swarm is built with a number of different technologies. As such it can be a bit of a challenge to ramp up on if you haven't done web development before. This section lists some of the best resources we've found for learning how to develop for Swarm.

jQuery

A free three hour course on jQuery basics. Highly recommended if you haven't used jQuery before. It also covers some JavaScript and CSS basics:

<http://try.jquery.com>

JavaScript Resources

A free, in-browser Javascript course:

<https://www.codecademy.com/tracks/javascript-combined>

PHP Resources

- A free PHP tutorial:
<http://www.w3schools.com/php/default.asp>
- A handy PHP cheat sheet:
<https://i.emezeta.com/weblog/emezeta-php-card-v0.2.png>

Zend Framework 2 Resources

- An intense tutorial, but it does cover most of the basics:
<http://framework.zend.com/manual/2.0/en/user-guide/overview.html>
- Really nice high level architecture overview by a Zend engineer:
<https://speakerdeck.com/ezimuel/mvc-plus-events-plus-modules-the-new-architecture-of-zf2>

Development mode

Swarm has a *development* mode that, when enabled, changes Swarm's behavior in the following ways:

- CSS and JavaScript code is not aggregated. Each CSS or JavaScript file is fetched individually, which makes it much easier to identify where styles or functions exist and how they apply to Swarm. Due to the additional HTTP requests, development mode should not be used in production environments.
- Errors and exceptions that may occur are displayed in Swarm's UI. This is particularly useful to developers of Swarm modules. As the error information might disclose system paths or configuration, development mode should not be used in production environments.

To enable development mode:

Adjust the `SWARM_ROOT/data/config.php` file to include:

```
<?php
return array(
    'p4' => ...
    'environment' => array(
        'mode' => 'development'
    )
);
```

To disable development mode:

Adjust the `SWARM_ROOT/data/config.php` file to exclude the `'mode' => 'development'` line.

Modules

A Swarm module is a folder that exists within the modules folder within your Swarm installation, where the folder name matches the module's name, and that folder must contain (at a minimum) a `Module.php` file. The file `Module.php` describes the dependencies, namespace, events subscriptions, and otherwise how the module integrates with Swarm.

This chapter provides only cursory coverage of how modules integrate with Swarm. Refer to the included `Jira` module for a good example of a simple module implementation within Swarm:

```
swarm_install/module/Jira
```

Influence activity events, emails, etc.

When something occurs in Helix Server (change submitted, files shelved, job added/edited), or state changes within Swarm (comment added, review state changed, etc.), the event is pushed onto a task queue. A background worker process subsequently pulls events off of the queue and publishes an event alerting modules about activity they may be interested in processing. This architecture allows the Swarm user interface to be fairly quick while accommodating tasks that might require notable processing time, or need to wait for related information to become available.

Subscribers to the worker event flesh the item out (fetch the change/job details, for example) and indicate if it should result in an activity entry, email notification, etc. By subscribing to various event topics, your module can pay attention to specific types of events. While your module is processing an event, it can modify the text of activity events, change the contents of emails, drop things entirely from activity, etc.

When your module subscribes to an event, set the priority to influence how early or late in the process it runs. You will likely want your module to run after most other modules have done their work to flesh out the event, but before Swarm's activity module processes it. The activity module sets a good example of subscribing to these events:

```
swarm_install/module/Activity/Module.php
```

Note that its priority is set to -100. Select a value before that for your own module (for example, 0 would be neutral and -90 would indicate that you are interested in being last).

The activity module listens to all events. However, be more selective. For example, if you are only interested in changes, subscribe to `task.change` instead of `*`. Current task types are:

- `task.change`
- `task.shelve`
- `task.review`
- `task.comment`
- `task.job`

Templates

Override existing view templates using your custom module. Have a look at an [example module](#) that demonstrates how to customize the email templates Swarm uses for comment notifications.

For more information about views, see the [Zend/View Quick Start](#).

View helpers

Set options on existing helpers

It is possible to influence the behavior of existing view helpers by setting options on them; for an example see: `swarm_install/module/Application/Module.php`

Register new helpers

It is also possible to register new view helpers by placing them within your module's hierarchy, for example, `MyModule/src/MyModule/View/Helper/Foo.php`. Use the following Swarm view helper for inspiration: `swarm_install/module/Activity/src/Activity/View/Helper/Activity.php`

Then register your view helper with the view manager via your `ModuleConfig`: `swarm_root/module/Activity/config/module.config.php`

Example linkify module

The following example module demonstrates how to turn text that appears in changelist, job, or code review descriptions, comments, and activity entries into links.

1. Create a folder called **Rickroll** in the module folder.

2. Create the file `Module.php` within `module/Rickroll` and edit it to contain:

```
<?php
/**
 * Helix Swarm
 *
 * @copyright 2014 Perforce Software. All rights reserved.
 * @license   Please see LICENSE.txt in top-level folder of this
distribution.
 * @version   <release>/<patch>
 */

namespace Rickroll;

use Application\FILTER\Linkify;

class Module
{
    public function onBootstrap()
    {
        Linkify::addCallback(
            // Linkify requires 3 parameters: "$linkify", "$value" and
"$escaper"
            function ($linkify, $value, $escaper) {
                if (strcasecmp($value, 'rickroll')) {
                    // not a hit; tell caller we did not handle this one
                    return false;
                }

                return '<a target="_new"
href="https://www.youtube.com/watch?v=dQw4w9WgXcQ">'
                    . $escaper->escapeHtml($value) . "</a>";
            },
            'rickroll',
            strlen('rickroll')
        );
    }
}
```

```
public function getConfig()
{
    return array();
}
}
```

This file achieves several things. It:

- makes the **Rickroll** folder a recognized module.
- declares the module's namespace, which matches the module's folder name **Rickroll**.
- provides an **onBootstrap()** method that allows the module's configuration to be established immediately after the module is loaded
- adds a callback to the Linkify module that declares what text is to be searched for (**rickroll**) and, when found, how to compose the link for that text.

Example email module

The following example module demonstrates how to customize the email template Swarm uses when sending notifications for comments.

1. Create a folder called Example in the module folder.

2. Create the file `Module.php` within `module/Example` and edit it to contain:

```
<?php

namespace Example;
use Zend\Mvc\MvcEvent;

/**
 * Automatically uses any custom email templates found under this
 * module's view/mail folder (e.g. Example/view/mail/commit-
 * html.phtml).
 *
 * Valid templates include:
 *
 * commit-html.phtml (HTML version of commit notification)
 * commit-text.phtml (text version of commit notification)
 * comment-html.phtml (HTML version of comment notification)
 * comment-text.phtml (text version of comment notification)
 * review-html.phtml (HTML version of review notification)
 * review-text.phtml (text version of review notification)
 *
 * Note: you need to provide custom templates for both HTML and text;
 * if you do not provide both, it is possible that the search for
 * customized templates only finds the non-customized versions,
making
 * it appear that this module is not working.
 */
class Module
{
    public function onBootstrap(MvcEvent $event)
    {
        $application = $event->getApplication();
        $services     = $application->getServiceManager();
        $events       = $services->get('queue')->getEventManager();

        $events->attach(
```

```
    '*',
    function ($event) {
        $mail = $event->getParam('mail');
        if (!$mail || !isset($mail['htmlTemplate'], $mail
['textTemplate'])) {
            return;
        }

        $html = __DIR__ . '/view/mail/' . basename($mail
['htmlTemplate']);
        $text = __DIR__ . '/view/mail/' . basename($mail
['textTemplate']);

        if (file_exists($html)) {
            $mail['htmlTemplate'] = $html;
        }
        if (file_exists($text)) {
            $mail['textTemplate'] = $text;
        }

        $event->setParam('mail', $mail);
    },
    -199
);
}
```

This file achieves several things. It:

- makes the **Example** folder a recognized module.
- declares the module's namespace, which matches the module's folder name **Example**.
- provides an **onBootstrap()** method that allows the module's configuration to be established immediately after the module is loaded
- attaches to events, looking for **mail** events. When such an event is encountered, it provides local paths for HTML and text-only view scripts.

- declares an event priority of `-199`. Because email delivery events are processed with a priority of `-200`, this module's templates should override any that may have been set elsewhere, and this occurs just prior to email delivery.
3. Create a folder called `view` in the `module/Example` folder.
 4. Create a folder called `mail` in the `module/Example/view` folder.

5. Create the file `comment-html.phtml` within `module/Example/view/mail` and edit it to contain:

```
<?php
    $user      = $activity->get('user');
    $userLink  = $user
                ? $this->qualifiedUrl('user', array('user' => $user))
                : null;
    $targetLink = $activity->getUrl($this->plugin('qualifiedUrl'));
?>
<html>
    <body style="font-family: sans-serif; background-color: #eee;
padding: 1em;">
        <div style="background-color: #fff; border: 1px solid #ccc;
padding: 1em;">
            <div style="font-size: 115%;">
                <?php if ($user): ?>
                    <a style="text-decoration: none;" href="<?php echo
$userLink ?>">
                        <?php echo $this->escapeHtml($user) ?>
                    </a>
                <?php endif; ?>
                <?php echo $this->escapeHtml($activity->get('action')) ?>
                <a style="text-decoration: none;" href="<?php echo
$targetLink ?>">
                    <?php echo $this->escapeHtml($activity->get('target')) ?>
                </a>
            </div>
        <br/>
        <?php
            // if the comment has file context, show it.
            $comment = $event->getParam('comment');
            $context = $comment
                ? $comment->getFileContext()
                : array('content' => null, 'line' => null);
            if (is_array($context['content']) && $context['line']) {
```

```

        $line = $context['line'] - count($context['content']) +
1;
        echo '<div style="font-family: monospace; white-space:
nowrap;'
            . ' padding: .5em 1em; overflow-x: auto; color:
#444;'
            . ' border: 1px solid #ddd; background-color:
#f7f7f7;">';
        foreach ((array) $context['content'] as $i => $content)
{
            echo '<div><span style="color: #999;">'
                . str_pad($line + $i,
                    strlen($context['line']),
                    "0",
                    STR_PAD_LEFT
                )
                . '</span>&nbsp;';
            . $this->preformat($content)
                ->setLinkify(false)
                ->setEmojify(false)
                ->setWordWrap(900)
            . "</div>\n";
        }
        echo '</div><br/>';
    }
?>
<div style="padding-bottom: .5em;">
<?php
    echo $this->preformat($activity->get('description'))
        ->setBaseUrl($this->qualifiedUrl())
        ->setEmojify(false)
        ->setWordWrap(900)
?>
</div>
</div>

```

```
</body>
</html>
```

This is a view script that provides the content for the HTML portion of the comment notification email. Note that it is considered best practice to use inline CSS for styling emails.

6. Create the file `comment-text.phtml` within `module/Example/view/mail` and edit it to contain:

```
<?php
    echo trim($activity->get('user'))
        . ' commented on '
        . $activity->get('target'));

    // if the comment has file context, show it.
    $comment = $event->getParam('comment');
    $context = $comment
        ? $comment->getFileContext()
        : array('content' => null);
    if (is_array($context['content'])) {
        echo "\n\n> " . $this->wordWrap(
            implode("\n> ", $context['content']), 900
        );
    }

    echo "\n\n" . trim($this->wordWrap($activity->get('description'),
    900));
    echo "\n\n" . $activity->getUrl($this->plugin('qualifiedUrl'));
?>
```

This is a view script that provides the content for the text-only portion of the comment notification email.

If you need to customize any other types of Swarm notification email messages, locate the view scripts (both HTML and text) and copy them into `module/Example/view/mail`, maintaining the existing filenames, then modify the new files as desired.

Note

If you do not copy both the HTML and text templates, it is possible for the search for customized templates to only find non-customized versions, making it appear that your module is not working.

CSS & JavaScript

Custom CSS and JavaScript files will be loaded automatically if you place them under either:

`SWARM_ROOT/public/custom/*. (css|js)`

`SWARM_ROOT/public/custom/sub-folder/*. (css|js)`

Note

Swarm only supports customizations placed directly within the `SWARM_ROOT/public/custom` folder or one sub-folder down. Customizations are added after all standard CSS and JavaScript. If more than one custom file is present they are added in alphabetical order.

Prior to creating any customizations, ensure that the `SWARM_ROOT/public/custom` folder exists; Swarm does not ship with or create this folder.

Sample Javascript extensions

The following are example Javascript customizations that you might wish to apply to your Swarm installation. Each example can be implemented separately. Ideally, you would apply the Javascript customizations in a single file to reduce the number of web requests required.

Warning

Coding errors in your custom JavaScript files could cause the Swarm UI to stop working. If this occurs, use your browser's development tools to identify which file contains the problem, and move that file out of the `SWARM_ROOT/public/custom` folder. When the problem has been resolved, the file can be returned.

Make the *Created* column on the Reviews page clickable

```
$(document).on( 'click', '.reviews-table td.created', function() {
    var change = $(this).closest('tr').data('id');
    window.location = '/reviews/' + change;
});
```

Save these lines in a file, perhaps `reviews-created-clickable.js`, within the `SWARM_ROOT/public/custom` folder. Swarm automatically includes the JavaScript file, making the entries in the *Created* column clickable immediately for all for subsequent review page views.

Customize the review state options text

```
var original = swarm.review.buildStateMenu;
swarm.review.buildStateMenu = function() {
  original();
  var needsReview = $('.icon-review-needsReview').parent();
  needsReview.html(needsReview.html().replace(
    'Needs Review', 'You need to review'
  ));
}
```

Replace the *You need to review* with the text you'd prefer to see instead of **Needs Review**.

Save this line in a file, perhaps `customize-review-states.js`, within the `SWARM_ROOT/public/custom`. Swarm automatically includes the JavaScript file, adjusting the text of the review states immediately for subsequent page views.

Sample CSS customizations

The following are example CSS customizations that you might wish to apply to your Swarm installation. Each example can be implemented separately. Ideally, you would apply the CSS customizations in a single file to reduce the number of web requests required.

Adjust the default tab size

```
body {
  tab-size: 4;
}
```

Replace the `4` with the tab size you prefer.

Save these lines in a file, perhaps `tab-size.css`, within the `SWARM_ROOT/public/custom` folder. Swarm automatically includes the CSS file, adjusting the tab size immediately for subsequent page views.

Apply a custom background to the login screen

```
body.route-login {
  background: url("/custom/login_background.jpg") no-repeat center
  fixed;
}
```

Replace the `/custom/login_background.jpg` URL fragment with image you want to use. If you do not specify a full URL, the image you specify must exist within the `SWARM_ROOT/public` folder, preferably within the `SWARM_ROOT/public/custom` folder.

Save these lines in a file, perhaps `login-background.css`, within the `SWARM_ROOT/public/custom` folder. Swarm automatically includes the CSS file, immediately replacing the login screen's background for subsequent page views.

Replace Swarm's logo in the main navigation bar

```
.navbar-site .brand {  
  background: url("/custom/navbar_logo.jpg") no-repeat center;  
}
```

Replace the `/custom/navbar_logo.jpg` URL fragment with image you want to use. If you do not specify a full URL, the image you specify must exist within the `SWARM_ROOT/public` folder, preferably within the `SWARM_ROOT/public/custom` folder.

Save these lines in a file, perhaps `navbar-logo.css`, within the `SWARM_ROOT/public/custom` folder. Swarm automatically includes the CSS file, immediately replacing the login screen's background for subsequent page views.

Note

Swarm's navbar design supports logos up to 24 pixels tall. Even if your logo fits within that height, you may need to also adjust the width, height, margins, or padding to suit your logo.

Adjust the appearance of avatars

```
img.avatar {  
  border: 2px dashed red;  
  border-radius: 10%;  
}
```

You can make a number of adjustments to the way Swarm presents avatars, such as adding a border and adjusting the border radius, as the example above demonstrates. You should avoid attempting to set specific sizes because Swarm uses different sizes depending on where the avatar is displayed.

Save these lines in a file, perhaps `avatars.css`, within the `SWARM_ROOT/public/custom` folder. Swarm automatically includes the CSS file, immediately replacing the login screen's background for subsequent page views.

Swarm API

This chapter describes the REST-like API provided by Swarm, which can be used to automate common Swarm interactions or integrate with external systems.

Authentication

Swarm's API requires an authenticated connection for all data-modifying endpoints. Authenticated connections are achieved using HTTP Basic Access Authentication.

Note

If the `require_login` configuration flag is set to `true`, all API endpoints require authentication.

For example:

```
$ curl -u "apiuser:password" https://myswarm.url/api/v9/projects
```

Swarm accepts a ticket from the Helix Core Server (previous versions of Swarm required this ticket to be host-unlocked, this is no longer true since Swarm 2017.1). It may also be possible to use a password in place of the ticket.

To acquire a ticket, run the following command:

```
$ p4 -p myp4host:1666 -u apiuser login -p
```

Important

For a Helix Core Server that has been configured for security level 3, passwords are not accepted.

For more information on security levels, see:

[Helix Core Server Administrator Guide: Fundamentals](#)

Note

If you use a ticket to authenticate against the Swarm API and the ticket expires, you need to acquire a new ticket to continue using the API.

If you make a request that requires authentication and you have not authenticated, the response is:

```
{
  "error": "Unauthorized"
}
```


Requests

Swarm's API includes endpoints that provide, create, and update information within Swarm.

If you make a request against an endpoint that is not supported, the response is:

```
{
  "error": "Method Not Allowed"
}
```

GET information

Use HTTP `GET` requests to ask for information from the API.

For example, to get the list of reviews:

```
$ curl https://myswarm.url/api/v9/reviews
```

Certain API calls support a `fields` parameter that allows you to specify which fields to include in the response, enabling more compact data sets. The following endpoints support fields:

- `/api/v9/projects`
- `/api/v9/reviews`
- `/api/v9/reviews/{id}`

Fields can be expressed as a comma-separated list, or using array-notation. For example:

```
$ curl
'https://
myswarm.url/api/v9/reviews?fields=id,description,participants'
```

Or:

```
$ curl 'https://myswarm.url/api/v9/reviews?fields[]=id,fields
[]=description,fields[]=participants'
```

POST new information

Use HTTP `POST` requests to create information via the API.

For example, to create a review using form-encoded values:

```
$ curl -u "apiuser:password" -d"change=12345"
https://myswarm.url/api/v9/reviews
```

The response should be similar to:

```
{
```

```
"isValid": true,  
"id": 12206  
}
```

To create a review using JSON:

```
$ curl -u "apiuser:password" -H "Content-type: application/json" \  
-d '{"change": 12345}' https://myswarm.url/api/v9/reviews
```

Update

Use HTTP `PATCH` requests to update information via the API.

If your HTTP client does not support `PATCH` requests, you can emulate this behavior by submitting an HTTP `POST` with a `"?_method=PATCH"` parameter.

Pagination

Most Swarm endpoints that provide data include the ability to paginate their results.

Each time data is requested, up to `max` results are included in the response, as is a value called `lastSeen`. `lastSeen` identifies the `id` of the last entry included in the results. If there are no further results, `lastSeen` is `null`.

To get the next set of results, include `after` set to the value of `lastSeen` in the API request. Entries up to and including the `id` specified by `after` are excluded from the response, and the next `max` entries are included.

See the [Activity endpoint](#) for example usage that demonstrates pagination.

Responses

Swarm's API responses are JSON formatted.

API versions

The current Swarm API version is `v9`. Here is a list of historical API versions:

API version	Swarm Release	Date	Description
v9	2018.1	April 2018	Include support for append and replace changelist to a review, 2 Factor Authentication and mark a comment as read.

API version	Swarm Release	Date	Description
v8	2017.4	December 2017	Include support for default reviewers on a project or project branch.
v7	2017.3	October 2017	Include support for groups as participants of a review and groups as moderators of a project branch.
v6	2017.1	May 2017	Include support for activity dashboard, archiving of inactive reviews, cleaning completed reviews and for voting reviews up and down.
v5	2016.3	December 2016	Include support for limiting comments to a specific review version.
v4	2016.2	October 2016	Include support for private projects, as well as file-level and line-level inline comments.
v3	2016.1 SP1	September 2016	Include new endpoint for comments.
v2	2016.1	May 2016	Include new endpoints for projects, groups, etc.
v1.2	2015.3	October 2015	Add author filter to the list reviews endpoint.
v1.1	2014.4	January 2015	Addition of required reviewers, and apiVersions .
v1	2014.3	July 2014	Initial release.

API Endpoints

This section includes coverage for each of the major endpoints provided by the API.

Activity : Swarm Activity List

GET /api/v9/activity

Summary: List Activity Entries

Description

Retrieve the Activity List.

Parameters

Parameter	Description	Type	Parameter Type	Required	Default Value
change	Optionally filter activity entries by associated Changelist ID. This only includes records for which there is an activity entry in Swarm.	integer	form	No	
stream	Optional activity stream to query for entries. This can include user-initiated actions (user-alice), activity relating to a user's followed projects/users (personal-alice), review streams (review-1234), and project streams (project-exampleproject).	string	form	No	
type	Type of activity, e.g., change , comment , job , or review .	string	form	No	
after	An activity ID to seek to. Activity entries up to and including the specified ID are excluded from the results and do not count towards max . Useful for pagination. Commonly set to the LastSeen property from a previous query.	integer	query	No	

Parameter	Description	Type	Parameter Type	Required	Default Value
max	Maximum number of activity entries to return. This does not guarantee that max entries are returned. It does guarantee that the number of entries returned won't exceed max . Server-side filtering may exclude some activity entries for permissions reasons.	integer	query	No	100
fields	An optional comma-separated list (or array) of fields to show. Omitting this parameter or passing an empty value shows all fields.	string	query	No	

Successful Response:

HTTP/1.1 200 OK

```
{
  "activity": [
    {
      "id": 123,
      "action": "committed",
      "behalfOf": null,
      "behalfOfExists": false,
      "change": 1,
      "date": "2016-01-15T12:12:12-08:00",
      "depotFile": null,
      "description": "test\n",
      "details": [],
      "followers": [],
      "link": ["change", {"change": 1}],
      "preposition": "into",
      "projectList": {"restricted": ["main"]},
```

```

    "projects": {"restricted": ["main"]},
    "streams": ["review-2", "user-foo", "personal-foo", "project-
restricted"],
    "target": "change 1",
    "time": 1404776681,
    "topic": "changes/1",
    "type": "change",
    "url": "/changes/1",
    "user": "bruno",
    "userExists": true
  }
],
"lastSeen": 1
}

```

Examples of usage

Fetching review history

To get the latest activity entries on a review:

```

curl -u "username:password"
"https://myswarm.url/api/v9/activity?stream=review-1234\
&fields=id,date,description,type\
&max=2"

```

You can tweak **max** and **fields** to fetch the data that works best for you.

Swarm responds with an array of activity entities, and a **lastSeen** value that can be used for pagination:

```

{
  "activity": [
    {
      "id": 10,
      "date": "2016-04-15T16:10:32-07:00",
      "description": "This is a test comment.",
      "type": "comment"
    },
    {

```

```
    "id": 9,  
    "date": "2016-03-31T13:48:15-07:00",  
    "description": "Updating RELNOTE review",  
    "type": "review"  
  }  
],  
  "lastSeen": 9  
}
```

Activity pagination

To get the second page of activity entries for a review (based on the previous example):

```
curl -u "username:password"  
"https://myswarm.url/api/v9/activity?stream=review-1234\  
&fields=id,date,description,type\  
&max=2\  
&lastSeen=9"
```

Swarm again responds with a list of activity entities and a **lastSeen** value:

```
{  
  "activity": [  
    {  
      "id": 8,  
      "date": "2016-03-30T12:12:12-07:00",  
      "description": "This is the first test comment.",  
      "type": "comment"  
    },  
    {  
      "id": 7,  
      "date": "2016-03-29T12:13:14-07:00",  
      "description": "Updating RELNOTE review",  
      "type": "review"  
    }  
  ],  
  "lastSeen": 7  
}
```

POST /api/v9/activity

Summary: Create Activity Entry

Description

Creates an entry in the Activity List. Note: The authenticated user must match the user provided unless the authenticated user has minimum admin-level privileges in which case any user may be specified.

Parameters

Parameter	Description	Type	Parameter Type	Required
type	Type of activity, used for filtering activity streams (values can include change , comment , job , review).	string	form	Yes
user	User who performed the action.	string	form	Yes
action	Action that was performed - past-tense, e.g., created or commented on .	string	form	Yes
target	Target that the action was performed on, e.g., issue 1234 .	string	form	Yes
topic	Optional topic for the activity entry. Topics are essentially comment thread IDs. Examples: reviews/1234 or jobs/job001234 .	string	form	No
description	Optional description of object or activity to provide context.	string	form	No
change	Optional changelist ID this activity is related to. Used to filter activity related to restricted changes.	integer	form	No

Parameter	Description	Type	Parameter Type	Required
streams []	Optional array of streams to display on. This can include user-initiated actions (user-alice), activity relating to a user's followed projects/users (personal-alice), review streams (review-1234), and project streams (project-exampleproject).	array (of strings)	form	No
link	Optional URL for target .	string	form	No

Successful Response:

HTTP/1.1 200 OK

```
{
  "activity": {
    "id": 123,
    "action": "ate",
    "behalfOf": null,
    "change": null,
    "depotFile": null,
    "details": [],
    "description": "",
    "followers": [],
    "link": "",
    "preposition": "for",
    "projects": [],
    "streams": [],
    "target": "the manual",
    "time": 1404776681,
    "topic": "",
    "type": "comment",
    "user": "A dingo"
  }
}
```

```
}
```

Examples of usage

Creating an activity entry

To create a plain activity entry:

```
curl -u "username:password" -d "type=job" -d "user=jira" -d  
"action=punted" -d "target=review 123" \  
  "https://myswarm.url/api/v9/activity"
```

JSON Response:

```
{  
  "activity": {  
    "id": 1375,  
    "action": "punted",  
    "behalfOf": null,  
    "change": null,  
    "depotFile": null,  
    "description": "",  
    "details": [],  
    "followers": [],  
    "link": "",  
    "preposition": "for",  
    "projects": [],  
    "streams": [],  
    "target": "review 123",  
    "time": 1461607739,  
    "topic": "",  
    "type": "job",  
    "user": "jira"  
  }  
}
```

Linking an activity entry to a review

Linking activity entries to reviews is useful. This involves providing `link`, `stream`, and `topic` fields in the activity data. The `link` field is used to make the `review 123` string in the activity entry

clickable. The **stream** field is needed so that the activity entry can be attached to the review in the Swarm interface. The **topic** field is used to link the activity entry to the comment thread for that topic, in the event that a user wants to comment on the activity.

To create a fully linked activity entry:

```
curl -u "username:password" -d "type=job" -d "user=jira" -d
"action=punted" -d "target=review 123" \
  -d "streams[]=review-123" \
  -d "link=reviews/123" \
  -d "topic=reviews/123" \
  "https://myswarm.url/api/v9/activity"
```

Swarm responds with an activity entity:

```
{
  "activity": {
    "id": 1375,
    "action": "punted",
    "behalfOf": null,
    "change": null,
    "depotFile": null,
    "description": "",
    "details": [],
    "followers": [],
    "link": "reviews/123",
    "preposition": "for",
    "projects": [],
    "streams": ["review-123"],
    "target": "review 123",
    "time": 1461607739,
    "topic": "reviews/123",
    "type": "job",
    "user": "jira"
  }
}
```

Changes : API controller providing a service for changes

GET /api/v9/changes/{change}/affectsprojects

Summary: Get projects, and branches, affected by a given change id.

Description

All authenticated users are able to use this API.

Successful Response:

```
HTTP/1.1 200 OK
```

```
{
  "change": {
    "id": "1050",
    "projects": {
      "jam": [
        "live",
        "main"
      ]
    }
  }
}
```

GET /api/v9/changes/{change}/defaultreviewers

Summary: Get default reviewers for a given change id.

Description

All authenticated users are able to use this API.

Successful Response:

```
HTTP/1.1 200 OK
```

```
{
  "change": {
```

```
"id": "1050",
"defaultReviewers": {
  "groups": {
    "group1": {"required": "1"},
    "group2": {}
  },
  "users": {
    "user1": {},
    "user2": {"required": "true"}
  }
}
}
```

GET /api/v9/changes/{id}/check

Summary: Performs checks on the change if enabled

Description

Performs checks on the change if workflow configuration requires it

Parameters

Parameter	Description	Type	Parameter Type	Required
id	Change to check	string	form	Yes
type	The type of check. Must have a value of enforced, strict or shelve	string	form	Yes

Successful Response:

HTTP/1.1 200 OK

```
{
  "status": "OK",
  "isValid": "true",
  "messages": []
}
```

```
}
```

Examples of usage

Carry out enforced checks on a change if configured

To check change 42:

```
curl -u "username:password" \  
  -X POST \  
  "https://my-swarm-host/api/v9/changes/42/check?type=enforced"
```

JSON Response:

```
{  
  "status": "OK",  
  "isValid": "true",  
  "messages": []  
}
```

Carry out enforced checks on a change if configured. Example of a failed 'requires review'

To check change 42:

```
curl -u "username:password" \  
  -X POST \  
  "https://my-swarm-host/api/v9/changes/42/check?type=enforced"
```

JSON Response:

```
{  
  "status": "NO_REVIEW",  
  "isValid": "false",  
  "messages": ["Change [42] must be associated with a review"]  
}
```

Carry out strict checks on a change if configured

To check change 42:

```
curl -u "username:password" \  
  -X POST \  
  "https://my-swarm-host/api/v9/changes/42/check?type=strict"
```

JSON Response:

```
{
  "status": "OK",
  "isValid": "true",
  "messages": []
}
```

Comments : Swarm Comments

GET /api/v9/comments/

Summary: Get List of Comments

Description

List comments.

Parameters

Parameter	Description	Type	Parameter Type	Required	Default Value
<code>after</code>	A comment ID to seek to. Comments up to and including the specified ID are excluded from the results and do not count towards <code>max</code> . Useful for pagination. Commonly set to the <code>lastSeen</code> property from a previous query.	integer	query	No	

Parameter	Description	Type	Parameter Type	Required	Default Value
max	Maximum number of comments to return. This does not guarantee that max comments are returned. It does guarantee that the number of comments returned won't exceed max .	integer	query	No	100
topic	Only comments for given topic are returned. Examples: reviews/1234 , changes/1234 or jobs/job001234 .	string	query	No	
context [version]	If a reviews/1234 topic is provided, limit returned comments to a specific version of the provided review.	integer	query	No	
ignoreArchived	Prevents archived comments from being returned. (v5+)	boolean	query	No	
tasksOnly	Returns only comments that have been flagged as tasks. (v5+)	boolean	query	No	
taskStates	Limit the returned comments to ones that match the provided task state (one or more of open , closed , verified , or comment). (v5+)	array (of strings)	query	No	

Parameter	Description	Type	Parameter Type	Required	Default Value
fields	An optional comma-separated list (or array) of fields to show for each comment. Omitting this parameter or passing an empty value shows all fields.	string	query	No	

Examples of successful responses

Successful Response:

```
HTTP/1.1 200 OK
```

```
{
  "topic": "",
  "comments": {
    "51": {
      "id": 51,
      "attachments": [],
      "body": "Short loin ground round sin reprehensible, venison west
participle triple.",
      "context": [],
      "edited": null,
      "flags": [],
      "likes": [],
      "taskState": "comment",
      "time": 1461164347,
      "topic": "reviews/885",
      "updated": 1461164347,
      "user": "bruno"
    }
  },
  "lastSeen": 51
}
```

```
}
```

Note

lastSeen can often be used as an offset for pagination, by using the value in the **after** parameter of subsequent requests.

When no results are found, the **comments** array is empty:

```
HTTP/1.1 200 OK

{
  "topic": "jobs/job000011",
  "comments": [],
  "lastSeen": null
}
```

Examples of usage**Listing comments**

To list comments:

```
curl -u "username:password" "https://my-swarm-host/api/v9/comments\
?topic=reviews/911&max=2&fields=id,body,time,user"
```

Swarm responds with a list of the first two comments for review 911 and a **lastSeen** value for pagination:

```
{
  "topic": "reviews/911",
  "comments": {
    "35": {
      "id": 35,
      "body": "Excitation thunder cats intelligent man braid organic
bitters.",
      "time": 1461164347,
      "user": "bruno"
    },
    "39": {
      "id": 39,
```

```
    "body": "Chamber tote bag butcher, shirk truffle mode shabby chic  
single-origin coffee.",  
    "time": 1461164347,  
    "user": "swarm_user"  
  }  
},  
"lastSeen": 39  
}
```

Paginating a comment listing

To obtain the next page of a comments list (based on the previous example):

```
curl -u "username:password" "https://my-swarm-host/api/v9/comments\  
?topic=reviews/911&max=2&fields=id,body,time,user&after=39"
```

Swarm responds with the second page of results, if any comments are present after the last seen comment:

```
{  
  "topic": "reviews/911",  
  "comments": {  
    "260": {  
      "id": 260,  
      "body": "Reprehensible do lore flank ham hock.",  
      "time": 1461164349,  
      "user": "bruno"  
    },  
    "324": {  
      "id": 324,  
      "body": "Sinter lo-fi temporary, nihilist tote bag mustache swag  
consequence interest flexible.",  
      "time": 1461164349,  
      "user": "bruno"  
    }  
  },  
  "lastSeen": 324  
}
```

POST /api/v9/comments/

Summary: Sends notification for comments

Description

Sends notification for comments

Parameters

Parameter	Description	Type	Parameter Type	Required
<code>topic</code>	This is going to send a single notification for any comments that were not notified immediately for the user authenticated for a given topic they are posting for. Examples: <code>reviews/1234</code>	string	query	Yes

Examples of successful responses

Successful Response:

```
HTTP/1.1 200 OK
```

```
{
  "isValid": true,
  "message": "Sending a notification for 3 comments",
  "code": 200
}
```

When no comment notifications are found:

```
HTTP/1.1 200 OK
```

```
{
  "isValid": true,
  "message": "No comment notifications to send",
  "code": 200
}
```

Sending notification for comments

To send all delayed comments:

```
curl -u "username:password" "https://my-swarm-host/api/v9/comments/notify\
?topic=reviews/911"
```

Swarm responds with a message detailing a notification sent with the number of comments it applied to.

```
{
  "isValid": true,
  "message": "No comment notifications to send",
  "code": 200
}
```

POST /api/v9/comments/

Summary: Add A Comment

Description

Add a comment to a topic (such as a review or a job)

Parameters

Parameter	Description	Type	Parameter Type	Required	Default Value
topic	Topic to comment on. Examples: reviews/1234 , changes/1234 or jobs/job001234 .	string	form	Yes	
body	Content of the comment.	string	form	Yes	
silenceNotification	If set to 'true' no notifications will ever be sent for this created comment	string	form	No	
delayNotification	If set to 'true' notifications will be delayed	string	form	No	

Parameter	Description	Type	Parameter Type	Required	Default Value
<code>taskState</code>	Optional task state of the comment. Valid values when adding a comment are <code>comment</code> and <code>open</code> . This creates a plain comment or opens a task, respectively.	string	form	No	comment
<code>flags[]</code>	Optional flags on the comment. Typically set to <code>closed</code> to archive a comment.	array (of strings)	form	No	
<code>context[file]</code>	File to comment on. Valid only for <code>changes</code> and <code>reviews</code> topics. Example: <code>//depot/main/README.txt</code> .	string	form	No	
<code>context[leftLine]</code>	Left-side diff line to attach the inline comment to. Valid only for <code>changes</code> and <code>reviews</code> topics. If this is specified, <code>context[file]</code> must also be specified.	integer	form	No	
<code>context[rightLine]</code>	Right-side diff line to attach the inline comment to. Valid only for <code>changes</code> and <code>reviews</code> topics. If this is specified, <code>context[file]</code> must also be specified.	integer	form	No	

Parameter	Description	Type	Parameter Type	Required	Default Value
<code>context</code> <code>[content]</code>	Optionally provide content of the specified line and its four preceding lines. This is used to specify a short excerpt of context in case the lines being commented on change during the review. When not provided, Swarm makes an effort to build the content on its own - as this involves file operations, it could become slow.	array (of strings)	form	No	
<code>context</code> <code>[version]</code>	With a <code>reviews</code> topic, this field specifies which version to attach the comment to.	integer	form	No	

Successful Response contains Comment entity:

HTTP/1.1 200 OK

```
{
  "comment": {
    "id": 42,
    "attachments": [],
    "body": "Best. Comment. EVER!",
    "context": [],
    "edited": null,
    "flags": [],
    "likes": [],
    "taskState": "comment",
    "time": 123456789,
    "topic": "reviews/2",
    "updated": 123456790,
    "user": "bruno"
  }
}
```

```
}
```

Examples of usage

Create a comment on a review

To create a comment on a review:

```
curl -u "username:password" \  
  -d "topic=reviews/2" \  
  -d "body=This is my comment. It is an excellent comment. It contains  
a beginning, a middle, and an end." \  
  "https://my-swarm-host/api/v9/comments"
```

JSON Response:

```
{  
  "comment": {  
    "id": 42,  
    "attachments": [],  
    "body": "This is my comment. It is an excellent comment. It contains a  
beginning, a middle, and an end.",  
    "context": [],  
    "edited": null,  
    "flags": [],  
    "likes": [],  
    "taskState": "comment",  
    "time": 123456789,  
    "topic": "reviews/2",  
    "updated": 123456790,  
    "user": "username"  
  }  
}
```

Open a task on a review

To create a comment on a review, and flag it as an open task:

```
curl -u "username:password" \  
  -d "topic=reviews/2" \  
  -d "taskState=open"
```



```
-d "taskState=open" \
-d "body=If you could go ahead and attach a cover page to your TPS
report, that would be great." \
  "https://my-swarm-host/api/v9/comments"
```

JSON Response:

```
{
  "comment": {
    "id": 43,
    "attachments": [],
    "body": "If you could go ahead and attach a cover page to your TPS
report, that would be great.",
    "context": [],
    "edited": null,
    "flags": [],
    "likes": [],
    "taskState": "open",
    "time": 123456789,
    "topic": "reviews/2",
    "updated": 123456790,
    "user": "username"
  }
}
```

PATCH /api/v9/comments/{id}

Summary: Edit A Comment

Description

Edit a comment

Parameters

Parameter	Description	Type	Parameter Type	Required
<u>id</u>	ID of the comment to be edited	integer	path	Yes

Parameter	Description	Type	Parameter Type	Required
topic	Topic to comment on. Examples: reviews/1234 , changes/1234 or jobs/job001234 .	string	form	No
body	Content of the comment.	string	form	Yes
taskState	Optional task state of the comment. Note that certain transitions (such as moving from open to verified) are not possible without an intermediate step (addressed , in this case). Examples: comment (not a task), open , addressed , verified .	string	form	No
flags []	Optional flags on the comment. Typically set to closed to archive a comment.	array (of strings)	form	No
silenceNotification	If set to 'true' no notifications will ever be sent for this edited comment	string	form	No
delayNotification	If set to 'true' notifications will be delayed	string	form	No

Successful Response contains Comment entity:

```
HTTP/1.1 200 OK
```

```
{
  "comment": {
    "id": 1,
```

```
"attachments": [],
"body": "Best. Comment. EVER!",
"context": [],
"edited": 123466790,
"flags": [],
"likes": [],
"taskState": "comment",
"time": 123456789,
"topic": "reviews/42",
"updated": 123456790,
"user": "bruno"
}
}
```

Examples of usage

Edit and archive a comment on a review

To edit and archive a comment on a review:

```
curl -u "username:password" \
  -X PATCH \
  -d "flags[]=closed" \
  -d "body=This comment wasn't as excellent as I may have lead you to
  believe. A thousand apologies." \
  "https://my-swarm-host/api/v9/comments/42"
```

JSON Response:

```
{
  "comment": {
    "id": 42,
    "attachments": [],
    "body": "This comment wasn't as excellent as I may have lead you to
    believe. A thousand apologies.",
    "context": [],
    "edited": 123466790,
    "flags": ["closed"],
    "likes": [],
```

```
"taskState": "comment",
"time": 123456789,
"topic": "reviews/2",
"updated": 123456790,
"user": "username"
}
}
```

Flag a task as addressed on a review

To flag an open task as addressed on a review:

```
curl -u "username:password" \
-X PATCH \
-d "taskState=addressed" \
"https://my-swarm-host/api/v9/comments/43"
```

JSON Response:

```
{
  "comment": {
    "id": 43,
    "attachments": [],
    "body": "If you could go ahead and attach a cover page to your TPS
report, that would be great.",
    "context": [],
    "edited": 123466790,
    "flags": ["closed"],
    "likes": [],
    "taskState": "comment",
    "time": 123456789,
    "topic": "reviews/2",
    "updated": 123456790,
    "user": "username"
  }
}
```

Groups : Swarm Groups

GET /api/v9/groups/

Summary: Get List of Groups

Description

Returns the complete list of groups in Swarm.

Parameters

Parameter	Description	Type	Parameter Type	Required	Default Value
after	A group ID to seek to. Groups prior to and including the specified ID are excluded from the results and do not count towards max . Useful for pagination. Commonly set to the lastSeen property from a previous query.	string	query	No	
max	Maximum number of groups to return. This does not guarantee that max groups are returned. It does guarantee that the number of groups returned won't exceed max .	integer	query	No	100
fields	An optional comma-separated list (or array) of fields to show for each group. Omitting this parameter or passing an empty value shows all fields.	string	query	No	
keywords	Keywords to limit groups on. Only groups where the group ID, group name (if set), or description contain the specified keywords are returned.	string	query	No	

Successful Response:

```
HTTP/1.1 200 OK

{
  "groups": [
    {
      "Group": "test-group",
      "MaxLockTime": null,
      "MaxResults": null,
      "MaxScanRows": null,
      "Owners": [],
      "PasswordTimeout": null,
      "Subgroups": [],
      "Timeout": 43200,
      "Users": ["bruno"],
      "config": {
        "description": "Our testing group",
        "emailAddress": "test-group3@host.domain",
        "emailFlags": [],
        "name": "Test Group",
        "useMailingList": true
      }
    }
  ]
}
```

Examples of usage

Listing groups

To list groups:

```
curl -u "username:password" \
  "https://myswarm.url/api/v9/groups?keywords=test-
  group&fields=Group,Owners,Users,config&max=2"
```

Swarm responds with a list of groups:

```
{
```

```
"groups": [
  {
    "Group": "test-group",
    "Owners": [],
    "Users": ["bruno"],
    "config": {
      "description": "Our testing group",
      "emailAddress": "test-group@host.domain",
      "emailFlags": {
        "reviews": "1",
        "commits": "0"
      },
      "name": "Test Group",
      "useMailingList: true
    }
  },
  {
    "Group": "test-group2",
    "Owners": [],
    "Users": ["bruno"],
    "config": {
      "description": "Our second testing group",
      "emailAddress": "test-group2@host.domain",
      "emailFlags": [],
      "name": "Test Group 2",
      "useMailingList: true
    }
  }
],
"lastSeen": "test-group2"
}
```

Paginating the groups list

Based on the previous example, we can pass a lastSeen value of `test-group2` to see if there are any subsequent groups in Swarm.

```
curl -u "username:password" \
```

```
"https://myswarm.url/api/v9/groups?keywords=test-
group&fields=Group,config&max=2&lastSeen=test-group2"
```

Swarm responds with a list of groups (minus the Owners and Users fields, as we haven't requested them):

```
{
  "groups": [
    {
      "Group": "test-group3",
      "config": {
        "description": "Our 3rd testing group",
        "emailAddress": "test-group3@host.domain",
        "emailFlags": [],
        "name": "Test Group 3",
        "useMailingList": true
      }
    }
  ],
  "lastSeen": "test-group3"
}
```

GET /api/v9/groups/{id}

Summary: Get Group Information

Description

Retrieve information about a group.

Parameters

Parameter	Description	Type	Parameter Type	Required
id	Group ID	string	path	Yes
fields	An optional comma-separated list (or array) of fields to show for each group. Omitting this parameter or passing an empty value shows all fields.	string	query	No

Successful Response:

```
HTTP/1.1 200 OK

{
  "group": {
    "Group": "test-group",
    "MaxLockTime": null,
    "MaxResults": null,
    "MaxScanRows": null,
    "Owners": [],
    "PasswordTimeout": null,
    "Subgroups": [],
    "Timeout": 43200,
    "Users": ["bruno"],
    "config": {
      "description": "Our testing group",
      "emailFlags": [],
      "name": "Test Group"
    }
  }
}
```

Examples of usage

Fetching a group

To fetch an individual group:

```
curl -u "username:password" "https://myswarm.url/api/v9/groups/my-group"
```

Swarm responds with the group entity:

```
{
  "group": {
    "Group": "test-group",
    "LdapConfig": null,
    "LdapSearchQuery": null,
    "LdapUserAttribute": null,
    "MaxLockTime": null,
```

```

    "MaxResults": null,
    "MaxScanRows": null,
    "Owners": [],
    "Users": ["bruno"],
    "config": {
      "description": "Our testing group",
      "emailAddress": "test-group@host.domain",
      "emailFlags": {
        "reviews": "1",
        "commits": "0"
      },
      "name": "Test Group",
      "useMailingList": true
    }
  }
}

```

Limiting returned fields

To limit the returned fields when fetching an individual group:

```
curl -u "username:password" "https://myswarm.url/api/v9/groups/my-group?fields=Group,Owners,Users,config"
```

Swarm responds with the group entity:

```

{
  "group": {
    "Group": "test-group",
    "Owners": [],
    "Users": ["bruno"],
    "config": {
      "description": "Our testing group",
      "emailFlags": [],
      "name": "Test Group"
    }
  }
}

```

POST /api/v9/groups/

Summary: Create a new Group

Description

Creates a new group in Swarm.

Parameters

Parameter	Description	Type	Parameter Type	Required
Group	Group identifier string.	string	form	Yes
Users	An optional array of group users. At least one of Users, Owners, or Subgroups is required.	array	form	No
Owners	An optional array of group owners. At least one of Users, Owners, or Subgroups is required.	array	form	No
Subgroups	An optional array of subgroups. At least one of Users, Owners, or Subgroups is required.	array	form	No
config[name]	An optional full name for the group.	string	form	No
config[description]	An optional group description.	string	form	No
config[emailAddress]	The email address for this group.	string	form	No
config[emailFlags][reviews]	Email members when a new review is requested.	boolean	form	No
config[emailFlags][commits]	Email members when a change is committed.	boolean	form	No

Parameter	Description	Type	Parameter Type	Required
<code>config</code> <code>[useMailingList]</code>	Whether to use the configured email address or expand individual members addresses.	boolean	form	No

Successful Response:

HTTP/1.1 200 OK

```
{
  "group": {
    "Group": "test-group",
    "MaxLockTime": null,
    "MaxResults": null,
    "MaxScanRows": null,
    "Owners": [],
    "PasswordTimeout": null,
    "Subgroups": [],
    "Timeout": null,
    "Users": ["alice"],
    "config": {
      "description": "Test test test",
      "emailAddress": "test-group@host.domain",
      "emailFlags": [],
      "name": "TestGroup",
      "useMailingList": true
    }
  }
}
```

Creating a group

Important

- Only users with *super* privileges in the Helix Core Server (**p4d**), or users with *admin* privileges in **p4d** versions 2012.1 or newer, can create groups.
- This API version is only capable of setting specific fields: **Group**, **Users**, **Owners**, **Subgroups**, **config**. Any other fields specified in the creation request are ignored.

To create a new group:

```
curl -u "username:password" \  
  -d "Group=my-group" \  
  -d "Owners[]=alice" \  
  -d "Owners[]=bob" \  
  -d "Users[]=bruno" \  
  -d "Users[]=user2" \  
  -d "config[description]=This group is special to me." \  
  -d "config[name]=My Group" \  
  -d "config[emailFlags][reviews]=1" \  
  -d "config[emailFlags][commits]=0" \  
  -d "config[emailAddress]=my-group@host.domain" \  
  -d "config[useMailingList]=false" \  
  "https://myswarm.url/api/v9/groups"
```

Assuming that the authenticated user has permission, Swarm responds with the new group entity:

```
{  
  "group": {  
    "Group": "my-group",  
    "MaxLockTime": null,  
    "MaxResults": null,  
    "MaxScanRows": null,  
    "Owners": ["username"],  
    "PasswordTimeout": null,  
    "Subgroups": [],  
    "Timeout": null,  
    "Users": [],  
    "config": {  
      "description": "This group is special to me.",
```

```

    "emailFlags": {
      "reviews": "1",
      "commits": "0"
    },
    "name": "My Group",
    "useMailingList": true
  }
}
}

```

PATCH /api/v9/groups/{id}

Summary: Edit a Group

Description

Change the settings of a group in Swarm. Only super users and group owners can perform this action.

Parameters

Parameter	Description	Type	Parameter Type	Required
id	Group ID	string	path	Yes
Users	An optional array of group users.	array	form	No
Owners	An optional array of group owners.	array	form	No
Subgroups	An optional array of group subgroups.	array	form	No
config[name]	An optional full name for the group.	string	form	No
config[description]	An optional group description.	string	form	No
config[emailAddress]	The email address for this group.	string	form	No

Parameter	Description	Type	Parameter Type	Required
<code>config</code> <code>[emailFlags]</code> <code>[commits]</code>	Email members when a change is committed.	boolean	form	No
<code>config</code> <code>[emailFlags]</code> <code>[reviews]</code>	Email members when a new review is requested.	boolean	form	No
<code>config</code> <code>[useMailingList]</code>	Whether to use the configured email address or expand individual members addresses.	boolean	form	No

Successful Response:

HTTP/1.1 200 OK

```
{
  "group": {
    "Group": "test-group",
    "Users": [],
    "Owners": [],
    "Subgroups": [],
    "config": {
      "description": "New Group Description",
      "name": "TestGroup",
      "useMailingList": true
    }
  }
}
```

Editing a group

Important

- Only users with *super* privileges in the Helix Core Server, or group owners, can edit groups.
- This API version is only capable of modifying specific fields: **Users**, **Owners**, **Subgroups**, **config**. Any other fields specified in the edit request are ignored.

Here is how to update the **name**, **description**, and **emailFlags** configuration of the group **my-group**:

```
curl -u "username:password" -X PATCH \  
  -d "config[description]=This group is special to me." \  
  -d "config[name]=My Group" \  
  -d "config[emailFlags][commits]=1" \  
  "https://myswarm.url/api/v9/groups/my-group"
```

Assuming that the authenticated user has permission, Swarm responds with the modified group entity:

```
{  
  "group": {  
    "Group": "my-group",  
    "Users": [],  
    "Owners": [],  
    "Subgroups": [],  
    "config": {  
      "description": "This group is special to me.",  
      "emailAddress": "test-group@host.domain",  
      "emailFlags": {  
        "reviews": "1",  
        "commits": "1"  
      },  
      "name": "My Group",  
      "useMailingList": true  
    }  
  }  
}
```

DELETE /api/v9/groups/{id}

Summary: Delete a Group

Description

Delete a group. Only super users and group owners can perform this action.

Parameters

Parameter	Description	Type	Parameter Type	Required
<code>id</code>	Group ID.	string	path	Yes

Successful Response:

```
HTTP/1.1 200 OK
```

```
{
  "id": "test-group"
}
```

Deleting a group

Important

Only *super* users and group owners can delete groups.

```
curl -u "username:password" -X DELETE
"https://myswarm.url/api/v9/groups/my-group"
```

Assuming that the authenticated user has permission, Swarm responds with the `id` of the deleted group:

```
{
  "id": "my-group"
}
```

Index : Basic API controller providing a simple version action

GET /api/v9/version

Summary: Show Version Information

Description

This can be used to determine the currently-installed Swarm version, and also to check that Swarm's API is responding as expected.

Successful Response:

```
HTTP/1.1 200 OK

{
  "year": "2017",
  "version": "SWARM/2017.3-MAIN/8499605 (2017/10/25)"
}
```

Note

Note: **year** refers to the year of the Swarm release, not necessarily the current year.

Login : Swarm Login API

GET /api/v9/checkauth/

Summary: checking the 2FA authentication

Description

checking the 2FA authentication

Successful Response:

```
HTTP/1.1 200 OK

{
  "results": {
    "trigger": "GAuth says yes!",
    "successMsg": "Second factor authentication approved."
  },
  "code": 200
}
```

Checking the 2FA authentication

To Check User prompt input for 2FA

```
curl -u "username:password" \
```

```
"https://myswarm.url/api/v9/login/checkauth"
```

Assuming that the authenticated user has permission, Swarm responds with the next step in the 2FA login:

```
{
  "results": {
    "trigger": "GAuth says yes!",
    "successMsg": "Second factor authentication approved."
  },
  "code": 200
}
```

GET /api/v9/listmethods/

Summary: Get List of 2FA Methods

Description

Returns the complete list of methods of 2FA.

Successful Response:

```
HTTP/1.1 200 OK
```

```
{
  "results": {
    "methods": {
      "1": {
        "methodName": "Method Name will be here",
        "methodDesc": "Method Description will be here"
      },
      "2": {
        "methodName": "Method Name will be here",
        "methodDesc": "Method Description will be here"
      },
      "3": {
        "methodName": "Method Name will be here",
        "methodDesc": "Method Description will be here"
      },
    }
  }
}
```

```

    "4": {
      "methodName": "Method Name will be here",
      "methodDesc": "Method Description will be here"
    }
  },
  "option": {
    "persist": "option",
    "nextState": "init-auth"
  },
  "code": 200
}

```

Listing 2FA Methods

To list the 2FA methods:

```

curl -u "username:password" \
  "https://myswarm.url/api/v9/login/listmethods"

```

Swarm responds with a list of 2FA methods:

```

{
  "results": {
    "methods": {
      "1": {
        "methodName": "Method Name will be here",
        "methodDesc": "Method Description will be here"
      },
      "2": {
        "methodName": "Method Name will be here",
        "methodDesc": "Method Description will be here"
      },
      "3": {
        "methodName": "Method Name will be here",
        "methodDesc": "Method Description will be here"
      },
      "4": {
        "methodName": "Method Name will be here",

```

```
    "methodDesc": "Method Description will be here"
  }
}
},
"option": {
  "persist": "option",
  "nextState": "init-auth"
},
"code": 200
}
```

POST /api/v9/checkauth/

Summary: checking the 2FA authentication

Description

checking the 2FA authentication

Parameters

Parameter	Description	Type	Parameter Type	Required
token	The token from the user for their 2FA prompt.	string	form	Yes

Successful Response:

HTTP/1.1 200 OK

```
{
  "results": {
    "trigger": "otp-generated|||GAuth says yes!",
    "successMsg": "Second factor authentication approved."
  },
  "code": 200
}
```

Checking the 2FA authentication

To Check User prompt input for 2FA

```
curl -X POST -u "username:password" \
  -d "token=TOKEN" \
  "https://myswarm.url/api/v9/login/checkauth"
```

Assuming that the authenticated user has permission, Swarm responds with the next step in the 2FA login:

```
{
  "results": {
    "trigger": "GAuth says yes!",
    "successMsg": "Second factor authentication approved."
  },
  "code": 200
}
```

POST /api/v9/initauth/

Summary: initiating the 2FA authentication

Description

initiating the 2FA authentication

Parameters

Parameter	Description	Type	Parameter Type	Required
<code>method</code>	The Method in which you want to use.	string	form	Yes

Successful Response:

```
HTTP/1.1 200 OK

{
  "results": {
    "trigger": "TriggerName",
    "successMsg": "Message from Authentication method"
  }
}
```

```
},
  "option": {
    "prompt": true,
    "nextState": "check-auth"
  },
  "code": 200
}
```

Initiating the 2FA authentication

To Initiate the user 2FA login:

```
curl -X POST -u "username:password" \
  -d "method=METHOD" \
  "https://myswarm.url/api/v9/login/initauth"
```

Assuming that the authenticated user has permission, Swarm responds with the next step in the 2FA login:

```
{
  "results": {
    "trigger": "TriggerName",
    "successMsg": "Message from Authentication method"
  },
  "option": {
    "prompt": true,
    "nextState": "check-auth"
  },
  "code": 200
}
```

Projects : Swarm Projects

GET /api/v9/projects/

Summary: Get List of Projects

Description

Returns a list of projects in Swarm that are visible to the current user. Administrators will see all projects,

including private ones.

Parameters

Parameter	Description	Type	Parameter Type	Required
fields	An optional comma-separated list (or array) of fields to show for each project. Omitting this parameter or passing an empty value shows all fields.	string	query	No
workflow	An optional parameter to only list projects using a workflow.	string	query	No

Successful Response:

HTTP/1.1 200 OK

```
{
  "projects": [
    {
      "id": "testproject3",
      "branches": [
        {
          "id": "main",
          "name": "main",
          "paths": ["/depot/main/TestProject/..."],
          "moderators": [],
          "moderators-groups": []
        }
      ],
      "deleted": false,
      "description": "Test test test",
      "followers": [],
      "jobview": "subsystem=testproject",
      "members": ["alice"],
      "name": "TestProject",
      "owners": [],
```



```
    "private": false,  
    "subgroups": []  
  }  
]  
}
```

Listing projects

To list all projects:

```
curl -u "username:password" "https://my-swarm-  
host/api/v9/projects?fields=id,description,members,name"
```

Pagination is not currently supported by this endpoint. Swarm responds with a list of all projects:

```
{  
  "projects": [  
    {  
      "id": "testproject1",  
      "description": "Test test test",  
      "members": ["alice"],  
      "name": "TestProject"  
    },  
    {  
      "id": "testproject2",  
      "description": "Test test test",  
      "members": ["alice"],  
      "name": "TestProject"  
    }  
  ]  
}
```

Project administrators wishing to see the `tests` and `deploy` fields must fetch projects individually.

GET /api/v9/projects/{id}

Summary: Get Project Information

Description

Retrieve information about a project.

Parameters

Parameter	Description	Type	Parameter Type	Required
id	Project ID	string	path	Yes
fields	An optional comma-separated list (or array) of fields to show for each project. Omitting this parameter or passing an empty value shows all fields.	string	query	No

Successful Response:

HTTP/1.1 200 OK

```
{
  "project": {
    "id": "testproject4",
    "defaults": [],
    "branches": [
      {
        "id": "main",
        "name": "main",
        "paths": ["/depot/main/TestProject/..."],
        "moderators": [],
        "moderators-groups": [],
        "defaults": [],
        "minimumUpVotes": null,
        "retainDefaultReviewers": false
      }
    ],
    "deleted": false,
    "description": "Test test test",
    "jobview": "subsystem=testproject",
    "members": ["alice"],
    "name": "TestProject",
    "owners": [],
    "private": false,
```

```
"minimumUpVotes": null,  
"retainDefaultReviewers": false,  
"subgroups": []  
}  
}
```

Fetching a project

To fetch an individual project:

```
curl -u "username:password" \  
  "https://my-swarm-  
host/api/v9/projects/testproject2?fields=id,description,members,name"
```

Swarm responds with a project entity:

```
{  
  "project": {  
    "id": "testproject2",  
    "defaults": [],  
    "description": "Test test test",  
    "members": ["alice"],  
    "name": "TestProject 2"  
  }  
}
```

Project administrators have access to additional fields (**tests** and **deploy**) when fetching individual projects using this endpoint.

POST /api/v9/projects/

Summary: Create a new Project

Description

Creates a new project in Swarm.

Parameters

Parameter	Description	Type	Parameter Type	Required
name	Project Name (is also used to generate the Project ID)	string	form	Yes
members	An array of project members.	array	form	Yes
subgroups	An optional array of project subgroups.	array	form	No
owners	An optional array of project owners.	array	form	No
description	An optional project description.	string	form	No
private	Private projects are visible only to Members, Moderators, Owners, and Administrators. (Default: false)	boolean	form	No
deploy	Configuration for automated deployment. Example: {"enabled": true, "url": "http://localhost/?change={change}"} "http://localhost/?change={change}"}	array	form	No
tests	Configuration for testing/continuous integration.	array	form	No
branches	Optional branch definitions for this project.	array	form	No
jobview	An optional jobview for associating certain jobs with this project.	string	form	No
emailFlags[change_email_project_users]	Email members, moderators and followers when a change is committed.	boolean	form	No

Parameter	Description	Type	Parameter Type	Required
<code>emailFlags[review_email_project_members]</code>	Email members and moderators when a new review is requested.	boolean	form	No
<code>defaults</code>	An optional array of defaults at a project level (for example default reviewers).	array	form	No
<code>retainDefaultReviewers</code>	An optional to retain the default reviewers.	boolean	form	No
<code>minimumUpVotes</code>	An optional to set the minimum number of up votes required.	string	form	No

Examples of successful responses

Successful Response:

HTTP/1.1 200 OK

```
{
  "project": {
    "id": "testproject5",
    "defaults": [],
    "branches": [
      {
        "id": "main",
        "name": "main",
        "paths": ["//depot/main/TestProject/..."],
        "moderators": [],
        "moderators-groups": [],
        "defaults": [],
        "minimumUpVotes": null,
        "retainDefaultReviewers": false
      }
    ],
  },
}
```

```

    "deleted": false,
    "deploy": {"url": "", "enabled": false},
    "description": "Test test test",
    "followers": [],
    "jobview": "subsystem=testproject",
    "members": ["alice"],
    "name": "TestProject",
    "owners": [],
    "private": false,
    "minimumUpVotes": null,
    "retainDefaultReviewers": false,
    "subgroups": [],
    "tests": {"url": "", "enabled": false}
  }
}

```

Successful Response:

HTTP/1.1 200 OK

```

{
  "project": {
    "id": "testproject6",
    "defaults": {"user2":{"required":true}},
    "branches": [
      {
        "id": "main",
        "name": "main",
        "paths": ["//depot/main/TestProject/..."],
        "moderators": [],
        "moderators-groups": [],
        "defaults": {
          "reviewers":{
            "groups":{"swarm-group-group1":{"required":"1"}},
            "users":{"user1":{"required":true}}
          }
        }
      }
    ]
  }
}

```

```
    },
    "minimumUpVotes": null,
    "retainDefaultReviewers": false
  }
],
"deleted": false,
"deploy": {"url": "", "enabled": false},
"description": "New Project Description",
"followers": [],
"jobview": "subsystem=testproject",
"members": ["alice"],
"name": "TestProject",
"owners": [],
"private": false,
"minimumUpVotes": null,
"retainDefaultReviewers": false,
"subgroups": [],
"tests": {"url": "", "enabled": false}
}
}
```

Examples of usage

Creating a new project

To create a project:

```
curl -u "username:password" \
  -d "name=TestProject 3" \
  -d "description=The third iteration of our test project." \
  -d "members[]=alice" \
  -d "members[]=bob" \
  "https://my-swarm-host/api/v9/projects/"
```

Swarm responds with the new project entity:

```
{
  "project": {
    "id": "testproject3",
```

```

"defaults": [],
"branches": [],
"deleted": false,
"deploy": {"url": "", "enabled": false},
"description": "The third iteration of our test project.",
"followers": [],
"jobview": "subsystem=testproject",
"members": ["alice", "bob"],
"name": "TestProject 3",
"owners": [],
"private": false,
"minimumUpVotes": null,
"retainDefaultReviewers": false,
"subgroups": [],
"tests": {"url": "", "enabled": false}
}
}

```

Creating a private project with branches

Specifying a branch requires using array notation and providing at least two fields (**name** and **paths**) for each branch you wish to create. Creating more than one branch involves incrementing the **branches [0]** specifier for each branch - an example of this accompanies the PATCH endpoint documentation.

Projects are public by default. Marking a project as Private requires using **{private: true}** in JSON, and using **-d "private=1"** in regular form-encoded requests.

Important

Form-encoded requests only accept **0** for false in boolean values — using the word **false** will be evaluated as a non-zero (and therefore non-false) value.

```

curl -u "username:password" \
  -d "name=TestProject 4" \
  -d "private=1" \
  -d "members[]=bob" \
  -d "branches[0][name]=Branch One" \
  -d "branches[0][paths][]=//depot/main/TestProject/..." \
  "https://my-swarm-host/api/v9/projects"

```

Swarm responds with the new project entity:


```
{
  "project": {
    "id": "testproject-4",
    "defaults": [],
    "branches": [
      {
        "paths": [
          "//depot/main/TestProject/..."
        ],
        "name": "Branch One",
        "id": "branch-one",
        "moderators": [],
        "moderators-groups": [],
        "defaults": [],
        "minimumUpVotes": null,
        "retainDefaultReviewers": false
      }
    ],
    "deleted": false,
    "deploy": {"url": "", "enabled": false},
    "description": null,
    "emailFlags": [],
    "jobview": null,
    "members": ["bob"],
    "name": "TestProject 4",
    "owners": [],
    "private": true,
    "minimumUpVotes": null,
    "retainDefaultReviewers": false,
    "subgroups": [],
    "tests": {"url": "", "enabled": false}
  }
}
```

Creating a project to add default reviewers (

```
curl -u "<user>:<password>" \
```

```
-H "Content-Type: application/json" \
-X PATCH \
-d '{"name": "testproject-4", \
  "members": ["bob"], \
  "defaults":{"reviewers":{"user2":{"required":true}} \
  "branches":[{" \
    "name":"Branch One", \
    "paths":{"//depot/main/TestProject/..."} \
    "defaults":{"reviewers":{"swarm-group-group1": \
{"required":"1"},"user1":{"required":true}}}' \
  "https://my-swarm-host/api/v9/projects/testproject-4"
```

Or without JSON content:

```
curl -u "username:password" \
-X PATCH \
-d "name=TestProject 4" \
-d "members[]=bob" \
-d "defaults[reviewers][user2][required]=true" \
-d "branches[0][name]=Branch One" \
-d "branches[0][paths][]=//depot/main/TestProject/..." \
-d "branches[0][defaults][reviewers][swarm-group-group1][required]=1" \
\
-d "branches[0][defaults][reviewers][user1][required]=true" \
"https://my-swarm-host/api/v9/projects/testproject-4"
```

Swarm responds with project entity similar to:

```
{
  "project": {
    "id": "testproject-4",
    "defaults": [{"user2":{"required":true}}],
    "branches": [
      {
        "paths": [
          "//depot/main/TestProject/..."
        ],
        "name": "Branch One",
        "id": "branch-one",
```

```
    "moderators": [],
    "moderators-groups": [],
    "defaults": [{"reviewers": [{"swarm-group-group1": [{"required": "1"},
"user1": [{"required": true}]}],
    "minimumUpVotes": null,
    "retainDefaultReviewers": false
  }
],
"deleted": false,
"deploy": {"url": "", "enabled": false},
"description": null,
"emailFlags": [],
"jobview": null,
"members": ["bob"],
"name": "TestProject 4",
"owners": [],
"private": false,
"minimumUpVotes": null,
"retainDefaultReviewers": false,
"subgroups": [],
"tests": {"url": "", "enabled": false}
}
}
```

PATCH /api/v9/projects/{id}

Summary: Edit a Project

Description

Change the settings of a project in Swarm. If a project has owners set, only the owners can perform this action.

Parameters

Parameter	Description	Type	Parameter Type	Required
id	Project ID	string	path	Yes
name	Project Name (changing the project name does not change the project ID)	string	form	No
members	An array of project members.	array	form	No
subgroups	An optional array of project subgroups.	array	form	No
owners	An optional array of project owners.	array	form	No
description	Your project description.	string	form	No
private	Private projects are visible only to Members, Moderators, Owners, and Administrators. (Default: false)	boolean	form	No
deploy	Configuration for automated deployment. Example: {"enabled": true, "url": "http://localhost/?change={change}"}	array	form	No
tests	Configuration for testing/continuous integration.	array	form	No
branches	Optional branch definitions for this project.	array	form	No
jobview	A jobview for associating certain jobs with this project.	string	form	No

Parameter	Description	Type	Parameter Type	Required
<code>emailFlags[change_email_project_users]</code>	Email members, moderators and followers when a change is committed.	boolean	form	No
<code>emailFlags[review_email_project_members]</code>	Email members and moderators when a new review is requested.	boolean	form	No
<code>defaults</code>	An optional array of defaults at a project level (for example default reviewers).	array	form	No
<code>retainDefaultReviewers</code>	An optional to retain the default reviewers.	boolean	form	No
<code>minimumUpVotes</code>	An optional to set the minimum number of up votes required.	string	form	No

Examples of successful responses

Successful Response:

HTTP/1.1 200 OK

```
{
  "project": {
    "id": "testproject7",
    "branches": [
      {
        "id": "main",
        "name": "main",
        "paths": ["/depot/main/TestProject/..."],
        "moderators": [],
        "moderators-groups": [],
        "minimumUpVotes": null,
        "retainDefaultReviewers": false
      }
    ]
  }
}
```

```

    }
  ],
  "deleted": false,
  "deploy": {"url": "", "enabled": false},
  "description": "New Project Description",
  "followers": [],
  "jobview": "subsystem=testproject",
  "members": ["alice"],
  "name": "TestProject",
  "owners": [],
  "private": false,
  "minimumUpVotes": null,
  "retainDefaultReviewers": false,
  "subgroups": [],
  "tests": {"url": "", "enabled": false}
}
}

```

Successful Response:

HTTP/1.1 200 OK

```

{
  "project": {
    "id": "testproject8",
    "defaults": {"user2":{"required":true}},
    "branches": [
      {
        "id": "main",
        "name": "main",
        "paths": ["//depot/main/TestProject/..."],
        "moderators": [],
        "moderators-groups": [],
        "defaults": {
          "reviewers":{
            "groups":{"swarm-group-group1":{"required":"1"}},

```

```
        "users":{"user1":{"required":true}}
      }
    },
    "minimumUpVotes": null,
    "retainDefaultReviewers": false
  }
],
"deleted": false,
"deploy": {"url": "", "enabled": false},
"description": "New Project Description",
"followers": [],
"jobview": "subsystem=testproject",
"members": ["alice"],
"name": "TestProject",
"owners": [],
"private": false,
"minimumUpVotes": null,
"retainDefaultReviewers": false,
"subgroups": [],
"tests": {"url": "", "enabled": false}
}
}
```

Examples of usage

Editing a project

To edit a project:

Note

It is safe to edit a project without specifying branches, but the instructions for adding branches contain important information for modifying branch configuration.

```
curl -u "username:password" \  
  -X PATCH \  
  -d "description=Witness the power of a fully operational Swarm \  
project." \  

```

```
"https://my-swarm-host/api/v9/projects/testproject3"
```

Swarm responds with the updated project entity:

```
{
  "project": {
    "id": "testproject3",
    "branches": [],
    "defaults": [],
    "deleted": false,
    "deploy": {"url": "", "enabled": false},
    "description": "Witness the power of a fully operational Swarm
project.",
    "followers": [],
    "jobview": "subsystem=testproject",
    "members": ["alice"],
    "name": "TestProject 3",
    "owners": [],
    "private": false,
    "minimumUpVotes": null,
    "retainDefaultReviewers": false,
    "subgroups": [],
    "tests": {"url": "", "enabled": false}
  }
}
```

Editing a project to add a moderated branch and make the project public

Specifying a branch requires using array notation and providing at least two fields (**name** and **paths**) for each branch you wish to create. Creating more than one branch involves incrementing the **branches [0]** specifier for each branch.

Important

If you have existing branches, you must specify all of them in the query to avoid data loss. This operation sets the value of the entire **branches** property to match the provided input.

Marking a private project as Public requires using **{private: false}** in JSON, or using **-d "private=0"** in regular form-encoded requests.

Important

Form-encoded requests only accept 0 for false in boolean values — using the word `false` will be evaluated as a non-zero (and therefore non-false) value.

```
curl -u "username:password" \  
  -X PATCH \  
  -d "private=0" \  
  -d "branches[0][name]=Branch One" \  
  -d "branches[0][paths][]=//depot/main/TestProject/..." \  
  -d "branches[1][name]=Branch Two" \  
  -d "branches[1][paths][]=//depot/main/SecondBranch/..." \  
  -d "branches[1][moderators][]=bob" \  
  -d "branches[1][moderators-groups][]=group1" \  
  "https://my-swarm-host/api/v9/projects/testproject-4"
```

Swarm responds with the new project entity:

```
{  
  "project": {  
    "id": "testproject-4",  
    "branches": [  
      {  
        "paths": [  
          "//depot/main/TestProject/..."  
        ],  
        "name": "Branch One",  
        "id": "branch-one",  
        "moderators": [],  
        "moderators-groups": [],  
        "defaults": [],  
        "minimumUpVotes": null,  
        "retainDefaultReviewers": false  
      },  
      {  
        "paths": [  
          "//depot/main/SecondBranch/..."  
        ],  
        "name": "Branch Two",  
        "id": "branch-two",  
        "moderators": [  
          "bob"  
        ],  
        "moderators-groups": [  
          "group1"  
        ],  
        "defaults": [],  
        "minimumUpVotes": null,  
        "retainDefaultReviewers": false  
      }  
    ]  
  }  
}
```

```

    "name": "Branch Two",
    "id": "branch-two",
    "moderators": ["bob"],
    "moderators-groups": ["group1"],
    "defaults": [],
    "minimumUpVotes": null,
    "retainDefaultReviewers": false
  }
],
"deleted": false,
"deploy": {"url": "", "enabled": false},
"description": null,
"emailFlags": [],
"jobview": null,
"members": ["bob"],
"name": "TestProject 4",
"owners": [],
"private": false,
"minimumUpVotes": null,
"retainDefaultReviewers": false,
"subgroups": [],
"tests": {"url": "", "enabled": false}
}
}

```

Editing a project to add default reviewers

```

curl -u "<user>:<password>" \
  -H "Content-Type: application/json" \
  -X PATCH \
  -d '{"defaults":{"reviewers":{"user2":{"required":true}} \
    "branches":[{" \
      "name":"Branch One", \
      "paths":{"//depot/main/TestProject/..."} \
      "defaults": { \
        "reviewers":{ \

```

```

        "groups":{"group1":{"required":"1"}}, \
        "users":{"user1":{"required":true}} \
    } \
  ]]' \
  "https://my-swarm-host/api/v9/projects/testproject-4"

```

Or without JSON content:

```

curl -u "username:password" \
  -X PATCH \
  -d "name=TestProject 4" \
  -d "members[]=bob" \
  -d "defaults[reviewers][user2][required]=true" \
  -d "branches[0][name]=Branch One" \
  -d "branches[0][paths][]=//depot/main/TestProject/..." \
  -d "branches[0][defaults][reviewers][groups][group1][required]=1" \
  -d "branches[0][defaults][reviewers][users][user1][required]=true" \
  "https://my-swarm-host/api/v9/projects/testproject-4"

```

Swarm responds with project entity similar to:

```

{
  "project": {
    "id": "testproject-4",
    "defaults": [{"user2":{"required":true}}],
    "branches": [
      {
        "paths": [
          "//depot/main/TestProject/..."
        ],
        "name": "Branch One",
        "id": "branch-one",
        "moderators": [],
        "moderators-groups": [],
        "defaults": {
          "reviewers":{
            "groups":{"group1":{"required":"1"}},
            "users":{"user1":{"required":true}}
          }
        }
      }
    ]
  }
}

```

```

    },
    "minimumUpVotes": null,
    "retainDefaultReviewers": false
  }
],
"deleted": false,
"deploy": {"url": "", "enabled": false},
"description": null,
"emailFlags": [],
"jobview": null,
"members": ["bob"],
"name": "TestProject 4",
"owners": [],
"private": false,
"minimumUpVotes": null,
"retainDefaultReviewers": false,
"subgroups": [],
"tests": {"url": "", "enabled": false}
}
}

```

DELETE /api/v9/projects/{id}

Summary: Delete a Project

Description

Mark a Swarm project as deleted. The project ID and name cannot be reused. If a project has owners set, only the owners can perform this action.

Parameters

Parameter	Description	Type	Parameter Type	Required
id	Project ID	string	path	Yes

Successful Response:

HTTP/1.1 200 OK

```
{
  "id": "testproject"
}
```

Deleting a project

Super users, administrators, and owners can delete projects. Members can delete projects that have no owners set.

```
curl -u "username:password" -X DELETE "https://my-swarm-
host/api/v9/projects/testproject3"
```

Assuming that the authenticated user has permission, Swarm responds with the id of the deleted project:

```
{
  "id": "testproject3"
}
```

Reviews : Swarm Reviews

GET /api/v9/dashboards/action

Summary: Get reviews for action dashboard

Description

Gets reviews for the action dashboard for the authenticated user

Successful Commit contains Review and Commit Entities:

```
HTTP/1.1 200 OK

{
  "lastSeen": 120,
  "reviews": [
    {
      "id": 7,
      "author": "swarm_admin",
      "changes": [6],
```

```

    "comments": [0,0],
    "commits": [6],
    "commitStatus": [],
    "created": 1485793976,
    "deployDetails": [],
    "deployStatus": null,
    "description": "test\n",
    "groups": ["swarm-project-test"],
    "participants": {"swarm_admin":[]},
    "pending": false,
    "projects": {"test":["test"]},
    "roles": ["moderator|reviewer|required_reviewer|author"],
    "state": "needsReview",
    "stateLabel": "Needs Review",
    "testDetails": [],
    "testStatus": null,
    "type": "default",
    "updated": 1485958875,
    "updateDate": "2017-02-01T06:21:15-08:00"
  }
],
"totalCount": null
}

```

Getting reviews for the action dashboard

To list reviews:

```
curl -u "username:password" "http://my-swarm-
host/api/v9/dashboards/action"
```

Swarm responds with a list of the latest reviews, a **totalCount** field, and a **lastSeen** value for pagination:

```

{
  "lastSeen": 120,
  "reviews": [
    {
      "id": 7,

```

```
"author": "swarm_admin",
"changes": [6],
"comments": [0,0],
"commits": [6],
"commitStatus": [],
"created": 1485793976,
"deployDetails": [],
"deployStatus": null,
"description": "test\n",
"groups": ["swarm-project-test"],
"participants": {"swarm_admin":[]},
"pending": false,
"projects": {"test":["test"]},
"roles": ["moderator|reviewer|required_reviewer|author"],
"state": "needsReview",
"stateLabel": "Needs Review",
"testDetails": [],
"testStatus": null,
"type": "default",
"updated": 1485958875,
"updateDate": "2017-02-01T06:21:15-08:00"
}
],
"totalCount": null
}
```

GET /api/v9/reviews/

Summary: Get List of Reviews

Description

List and optionally filter reviews.

Parameters

Parameter	Description	Type	Parameter Type	Required	Default Value
after	A review ID to seek to. Reviews up to and including the specified id are excluded from the results and do not count towards max . Useful for pagination. Commonly set to the lastSeen property from a previous query.	integer	query	No	
max	Maximum number of reviews to return. This does not guarantee that max reviews are returned. It does guarantee that the number of reviews returned won't exceed max . Server-side filtering may exclude some reviews for permissions reasons.	integer	query	No	1000

Parameter	Description	Type	Parameter Type	Required	Default Value
<code>fields</code>	An optional comma-separated list (or array) of fields to show. Omitting this parameter or passing an empty value shows all fields.	string	query	No	
<code>author []</code>	One or more authors to limit reviews by. Reviews with any of the specified authors are returned. (v1.2+)	array (of strings)	query	No	
<code>change []</code>	One or more change IDs to limit reviews by. Reviews associated with any of the specified changes are returned.	array (of integers)	query	No	

Parameter	Description	Type	Parameter Type	Required	Default Value
hasReviewers	Boolean option to limit to reviews to those with or without reviewers. Use true or false for JSON-encoded data, 1 for true and or 0 for false for form-encoded data. The presence of the parameter without a value is evaluated as true.	boolean	query	No	
ids []	One or more review IDs to fetch. Only the specified reviews are returned. This filter cannot be combined with the max parameter.	array (of integers)	query	No	
keywords	Keywords to limit reviews by. Only reviews where the description, participants list or project list contain the specified keywords are returned.	string	query	No	

Parameter	Description	Type	Parameter Type	Required	Default Value
<code>participants[]</code>	One or more participants to limit reviews by. Reviews with any of the specified participants are returned.	array (of strings)	query	No	
<code>project[]</code>	One or more projects to limit reviews by. Reviews affecting any of the specified projects are returned.	array (of strings)	query	No	
<code>state[]</code>	One or more states to limit reviews by. Reviews in any of the specified states are returned.	array (of strings)	query	No	
<code>passesTests</code>	Boolean option to limit reviews by tests passing or failing. Use <code>true</code> or <code>false</code> for JSON-encoded data, <code>1</code> for true and <code>0</code> for false for form-encoded data. The presence of the parameter without a value is evaluated as true.	string	query	No	

Parameter	Description	Type	Parameter Type	Required	Default Value
notUpdatedSince	Option to fetch unchanged reviews. Requires the date to be in the format YYYY-mm-dd, for example 2017-01-01. Reviews to be returned are determined by looking at the last updated date of the review.	string	query	No	
hasVoted	Should have the value 'up' or 'down' to filter reviews that have been voted up or down by the current authenticated user.	string	query	No	
myComments	True or false to support filtering reviews that include comments by the current authenticated user.	boolean	query	No	

Examples of successful responses

Successful Response:

```
HTTP/1.1 200 OK
```

```
{
```

```
"lastSeen": 12209,
"reviews": [
  {
    "id": 12206,
    "author": "swarm",
    "changes": [12205],
    "comments": 0,
    "commits": [],
    "commitStatus": [],
    "created": 1402507043,
    "deployDetails": [],
    "deployStatus": null,
    "description": "Review Description\n",
    "participants": {
      "swarm": []
    },
    "pending": true,
    "projects": [],
    "state": "needsReview",
    "stateLabel": "Needs Review",
    "testDetails": [],
    "testStatus": null,
    "type": "default",
    "updated": 1402518492
  }
],
"totalCount": 1
}
```

Note

Swarm returns `null` for `totalCount` if no search filters were provided. `lastSeen` can often be used as an offset for pagination, by using the value in the `after` parameter of subsequent requests.

When no results are found, the `reviews` array is empty:

```
HTTP/1.1 200 OK
```

```
{
  "lastSeen": null,
  "reviews": [],
  "totalCount": 0
}
```

Examples of usage

Listing reviews

To list reviews:

```
curl -u "username:password" "https://my-swarm-
host/api/v9/reviews?max=2&fields=id,description,author,state"
```

Swarm responds with a list of the latest reviews, a **totalCount** field, and a **lastSeen** value for pagination:

```
{
  "lastSeen": 120,
  "reviews": [
    {
      "id": 123,
      "author": "bruno",
      "description": "Adding .jar that should have been included in
r110\n",
      "state": "needsReview"
    },
    {
      "id": 120,
      "author": "bruno",
      "description": "Fixing a typo.\n",
      "state": "needsReview"
    }
  ],
  "totalCount": null
}
```

The **totalCount** field is populated when keywords are supplied. It indicates how many total matches there are. If keywords are not supplied the **totalCount** field remains **null**, indicating that the list of

all reviews is being queried.

Paginating a review listing

To obtain the next page of a reviews list (based on the previous example):

```
curl -u "username:password" "https://my-swarm-host/api/v9/reviews\
?max=2&fields=id,description,author,state&after=120"
```

Swarm responds with the second page of results, if any reviews are present after the last seen review:

```
{
  "lastSeen": 100,
  "reviews": [
    {
      "id": 110,
      "author": "bruno",
      "description": "Updating Java files\n",
      "state": "needsReview"
    },
    {
      "id": 100,
      "author": "bruno",
      "description": "Marketing materials for our new cutting-edge
product\n",
      "state": "needsReview"
    }
  ],
  "totalCount": null
}
```

Finding reviews for a change or a list of changes

Given a list of change IDs (5, 6, 7), here is how to check if any of them have reviews attached:

```
curl -u "username:password" "https://my-swarm-host/api/v9/reviews\
?max=2&fields=id,changes,description,author,state&change\[\]=5&change\
\]=6&change\[\]=7"
```

Swarm responds with a list of reviews that include these changes:

```
{
```

```

"lastSeen": 100,
"reviews": [
  {
    "id": 110,
    "author": "bruno",
    "changes": [5],
    "description": "Updating Java files\n",
    "state": "needsReview"
  },
  {
    "id": 100,
    "author": "bruno",
    "changes": [6,7],
    "description": "Marketing materials for our new cutting-edge
product\n",
    "state": "needsReview"
  }
],
"totalCount": 2
}

```

If no corresponding reviews are found, Swarm responds with an empty reviews list:

```

{
  "lastSeen": null,
  "reviews": [],
  "totalCount": 0
}

```

Finding inactive reviews (by checking the last updated date)

```

curl -u "username:password" "https://my-swarm-host/api/v9/reviews\
?max=2&fields=id,changes,description,author,state&notUpdatedSince=2017-01-
01"

```

Swarm responds with a list of reviews that have not been updated since the notUpdatedSince date:

```

{
  "lastSeen": 100,
  "reviews": [

```



```
{
  "id": 110,
  "author": "bruno",
  "changes": [5],
  "description": "Updating Java files\n",
  "state": "needsReview"
},
{
  "id": 100,
  "author": "bruno",
  "changes": [6,7],
  "description": "Marketing materials for our new cutting-edge
product\n",
  "state": "needsReview"
}
],
"totalCount": 2
}
```

Finding reviews I have voted up

```
curl -u "username:password" "https://my-swarm-host/api/v9/reviews\
?max=2&fields=id,changes,description,author,state&hasVoted=up"
```

Swarm responds with a list of reviews that include these changes:

```
{
  "lastSeen": 100,
  "reviews": [
    {
      "id": 110,
      "author": "bruno",
      "changes": [5],
      "description": "Updating Java files\n",
      "state": "needsReview"
    },
    {
      "id": 100,
```

```

    "author": "bruno",
    "changes": [6,7],
    "description": "Marketing materials for our new cutting-edge
product\n",
    "state": "needsReview"
  }
],
"totalCount": 2
}

```

If no corresponding reviews are found, Swarm responds with an empty reviews list:

```

{
  "lastSeen": null,
  "reviews": [],
  "totalCount": 0
}

```

Finding reviews I have commented on (current authenticated user)

```

curl -u "username:password" "https://my-swarm-host/api/v9/reviews\
?max=2&fields=id,changes,description,author,state&myComments=true"

```

Swarm responds with a list of reviews that include these changes:

```

{
  "lastSeen": 100,
  "reviews": [
    {
      "id": 110,
      "author": "bruno",
      "changes": [5],
      "description": "Updating Java files\n",
      "state": "needsReview"
    },
    {
      "id": 100,
      "author": "bruno",
      "changes": [6,7],
      "description": "Marketing materials for our new cutting-edge

```

```
product\n",
  "state": "needsReview"
}
],
"totalCount": 2
}
```

If no corresponding reviews are found, Swarm responds with an empty reviews list:

```
{
  "lastSeen": null,
  "reviews": [],
  "totalCount": 0
}
```

GET /api/v9/reviews/{id}

Summary: Get Review Information

Description

Retrieve information about a review.

Parameters

Parameter	Description	Type	Parameter Type	Required
id	Review ID	integer	path	Yes
fields	An optional comma-separated list (or array) of fields to show. Omitting this parameter or passing an empty value shows all fields.	string	query	No

Successful Response:

```
HTTP/1.1 200 OK
```

```
{
  "review": {
    "id": 12204,
```

```
"author": "bruno",
"changes": [10667],
"commits": [10667],
"commitStatus": [],
"created": 1399325913,
"deployDetails": [],
"deployStatus": null,
"description": "Adding .jar that should have been included in
r10145\n",
"participants": {
  "alex_qc": [],
  "bruno": {
    "vote": 1,
    "required": true
  },
  "vera": []
},
"reviewerGroups": {
  "group1" : [],
  "group2" : {
    "required" : true
  },
  "group3" : {
    "required" : true,
    "quorum": "1"
  }
},
"pending": false,
"projects": {
  "swarm": ["main"]
},
"state": "archived",
"stateLabel": "Archived",
"testDetails": {
  "url": "http://jenkins.example.com/job/project_ci/123/"
},
```

```
"testStatus": null,  
"type": "default",  
"updated": 1399325913  
}  
}
```

Example 404 Response:

HTTP/1.1 404 Not Found

```
{  
  "error": "Not Found"  
}
```

Fetching a review

To fetch a review:

```
curl -u "username:password" "https://my-swarm-host/api/v9/reviews/123"
```

Swarm responds with a review entity:

```
{  
  "review": {  
    "id": 123,  
    "author": "bruno",  
    "changes": [122,124],  
    "commits": [124],  
    "commitStatus": [],  
    "created": 1399325913,  
    "deployDetails": [],  
    "deployStatus": null,  
    "description": "Adding .jar that should have been included in r110\n",  
    "groups": [],  
    "participants": {  
      "alex_gc": [],  
      "bruno": {  
        "vote": 1,  
        "required": true  
      },  
    },  
  },  
}
```

```
    "vera": []
  },
  "reviewerGroups": {
    "group1" : [],
    "group2" : {
      "required" : true
    },
    "group3" : {
      "required" : true,
      "quorum": "1"
    }
  },
  "pending": false,
  "projects": {
    "swarm": ["main"]
  },
  "state": "archived",
  "stateLabel": "Archived",
  "testDetails": {
    "url": "http://jenkins.example.com/job/project_ci/123/"
  },
  "testStatus": null,
  "type": "default",
  "updated": 1399325913,
  "versions": []
}
}
```

GET /api/v9/reviews/{id}/transitions

Summary: Get transitions for a review (v9+)

Description

Get the allowed transitions for a review

Parameters

Parameter	Description	Type	Parameter Type	Required
upVoters	A list of users whose vote up will be assumed when determining the transitions. For example if a user has not yet voted but would be the last required vote and asked for possible transitions we would want to include 'approve'	string	query	No

Successful Response:

```
HTTP/1.1 200 OK
```

```
{
  "isValid": "true",
  "transitions": {
    "needsRevision": "Needs Revision",
    "approved": "Approve",
    "approved:commit": "Approve and Commit",
    "rejected": "Reject",
    "archived": "Archive"
  }
}
```

Getting transitions that a review with id 1 can transition to.

```
curl -u "username:password" "https://my-swarm-host/api/v9/reviews/1/transitions?upVoters=bruno"
```

The transitions that are returned depend on the current review state, Swarm setup and the configuration of associated projects and branches

```
{
  "isValid": "true"
  "transitions": {
    "needsRevision": "Needs Revision",
    "approved": "Approve",
    "approved:commit": "Approve and Commit",
```

```

    "rejected": "Reject",
    "archived": "Archive"
  }
}

```

POST /api/v9/reviews/

Summary: Create a Review

Description

Pass in a changelist ID to create a review. Optionally, you can also provide a description and a list of reviewers.

Parameters

Parameter	Description	Type	Parameter Type	Required
change	Change ID to create a review from	integer	form	Yes
description	Description for the new review (defaults to change description)	string	form	No
reviewers	A list of reviewers for the new review	array (of strings)	form	No
requiredReviewers	A list of required reviewers for the new review (v1.1+)	array (of strings)	form	No
reviewerGroups	A list of required reviewers for the new review (v7+)	array	form	No

Successful Response contains Review Entity:

```
HTTP/1.1 200 OK
```

```

{
  "review": {
    "id": 12205,

```



```
"author": "bruno",
"changes": [10667],
"commits": [10667],
"commitStatus": [],
"created": 1399325913,
"deployDetails": [],
"deployStatus": null,
"description": "Adding .jar that should have been included in
r10145\n",
"participants": {
  "bruno": []
},
"reviewerGroups": {
  "group1" : [],
  "group2" : {
    "required" : true
  },
  "group3" : {
    "required" : true,
    "quorum": "1"
  }
},
"pending": false,
"projects": [],
"state": "archived",
"stateLabel": "Archived",
"testDetails": [],
"testStatus": null,
"type": "default",
"updated": 1399325913
}
}
```

Starting a review

To start a review for a committed change or a non-empty shelved changelist specifying reviewer groups:

```
curl -u "username:password" \
```

```
-d "change=122" \  
-d "reviewerGroups[0][name]=group1" \  
-d "reviewerGroups[1][name]=group2" \  
-d "reviewerGroups[1][required]=true" \  
-d "reviewerGroups[2][name]=group3" \  
-d "reviewerGroups[2][required]=true" \  
-d "reviewerGroups[2][quorum]=1" \  
"https://my-swarm-host/api/v9/reviews/"
```

Swarm responds with the new review entity:

```
{  
  "review": {  
    "id": 123,  
    "author": "bruno",  
    "changes": [122],  
    "commits": [],  
    "commitStatus": [],  
    "created": 1399325913,  
    "deployDetails": [],  
    "deployStatus": null,  
    "description": "Adding .jar that should have been included in r110\n",  
    "groups": [],  
    "participants": {  
      "bruno": []  
    },  
    "reviewerGroups": {  
      "group1" : [],  
      "group2" : {  
        "required" : true  
      },  
      "group3" : {  
        "required" : true,  
        "quorum": "1"  
      }  
    },  
    "pending": true,  
  }  
}
```

```

    "projects": [],
    "state": "needsReview",
    "stateLabel": "Needs Review",
    "testDetails": [],
    "testStatus": null,
    "type": "default",
    "updated": 1399325913,
    "versions": []
  }
}

```

POST /api/v9/reviews/archive/

Summary: Archiving the inactive reviews (v6+)

Description

Archiving reviews not updated since the date (v6+)

Parameters

Parameter	Description	Type	Parameter Type	Required
notUpdatedSince	Updated since date. Requires the date to be in the format YYYY-mm-dd, for example 2017-01-01	string	form	Yes
description	A description that is posted as a comment for archiving.	string	form	Yes

Successful Response:

HTTP/1.1 200 OK

```

{
  "archivedReviews": [
    {
      "id": 836,
      "author": "swarm",

```

```

    "changes": [789],
    "commits": [],
    "commitStatus": [],
    "created": 1461164339,
    "deployDetails": [],
    "deployStatus": null,
    "description": "Review description\n",
    "groups": [],
    "participants": {
      "swarm": []
    },
    "pending": false,
    "projects": [],
    "state": "archived",
    "stateLabel": "Archived",
    "testDetails": [],
    "testStatus": null,
    "type": "default",
    "updated": 1478191607
  }
],
"failedReviews": []
}

```

Archiving reviews inactive since 2016/06/30

To archive reviews not updated since 2016/06/30 inclusive:

```

curl -u "username:password" -d "notUpdatedSince=2016-06-30" \
  "https://my-swarm-host/api/v9/reviews/archive/"

```

Swarm responds with the list of archived reviews and failed reviews if there are any:

```

{
  "archivedReviews": [
    {
      "id": 911,
      "author": "swarm",
      "changes": [601],

```

```
"commits": [],
"commitStatus": [],
"created": 1461164344,
"deployDetails": [],
"deployStatus": null,
"description": "Touch up references on html pages.\n",
"groups": [],
"participants": {
  "swarm": []
},
"pending": false,
"projects": [],
"state": "archived",
"stateLabel": "Archived",
"testDetails": [],
"testStatus": null,
"type": "default",
"updated": 1478191605
},
{
  "id": 908,
  "author": "earl",
  "changes": [605],
  "commits": [],
  "commitStatus": [],
  "created": 1461947794,
  "deployDetails": [],
  "deployStatus": null,
  "description": "Remove (attempted) installation of now deleted man
pages.\n",
  "groups": [],
  "participants": {
    "swarm": []
  },
  "pending": false,
  "projects": [],
```

```

    "state": "archived",
    "stateLabel": "Archived",
    "testDetails": [],
    "testStatus": null,
    "type": "default",
    "updated": 1478191605
  }
],
"failedReviews": [
  {
  }
]
}

```

If no reviews are archived, Swarm responds with an empty reviews list:

```

{
  "archivedReviews": [],
  "failedReviews": []
}

```

POST /api/v9/reviews/{id}/changes/

Summary: Add Change to Review

Description

Links the given change to the review and schedules an update.

Parameters

Parameter	Description	Type	Parameter Type	Required	Default Value
id	Review ID	integer	path	Yes	
change	Change ID	integer	form	Yes	
mode	The mode of operation, currently 'replace' or 'append'	string	form	No	replace

Successful Response contains Review Entity:

```
HTTP/1.1 200 OK

{
  "review": {
    "id": 12206,
    "author": "bruno",
    "changes": [10667, 12000],
    "commits": [10667, 12000],
    "commitStatus": [],
    "created": 1399325913,
    "deployDetails": [],
    "deployStatus": null,
    "description": "Adding .jar that should have been included in
r10145\n",
    "participants": {
      "bruno": []
    },
    "pending": false,
    "projects": [],
    "state": "archived",
    "stateLabel": "Archived",
    "testDetails": [],
    "testStatus": null,
    "type": "default",
    "updated": 1399325913
  }
}
```

Adding a change to a review

You may want to update a review from a shelved or committed change that is different from the initiating change. This is done by adding a change to the review.

To replace a changelist:

```
curl -u "username:password" -d "change=124" https://my-swarm-
host/api/v9/reviews/123/changes/"
```

To append a changelist:

```
curl -u "username:password" -d "change=124" -d "mode=append" https://my-swarm-host/api/v9/reviews/123/changes/"
```

Swarm responds with the updated review entity:

```
{
  "review": {
    "id": 123,
    "author": "bruno",
    "changes": [122, 124],
    "commits": [],
    "commitStatus": [],
    "created": 1399325913,
    "deployDetails": [],
    "deployStatus": null,
    "description": "Adding .jar that should have been included in r110\n",
    "groups": [],
    "participants": {
      "bruno": []
    },
    "pending": true,
    "projects": [],
    "state": "needsReview",
    "stateLabel": "Needs Review",
    "testDetails": [],
    "testStatus": null,
    "type": "default",
    "updated": 1399325913,
    "versions": [
      {
        "difference": 1,
        "stream": null,
        "change": 124,
        "user": "bruno",
        "time": 1399330003,
        "pending": true,
        "archiveChange": 124
      }
    ]
  }
}
```



```

    }
  ]
}
}

```

POST /api/v9/reviews/{id}/cleanup

Summary: Clean up a review (v6+)

Description

Clean up a review for the given id.

Parameters

Parameter	Description	Type	Parameter Type	Required
reopen	Expected to be a boolean (defaulting to false). If true then an attempt will be made to reopen files into a default changelist	boolean	form	No

Successful Response:

```
HTTP/1.1 200 OK
```

```

{
  "complete": [
    {
      "1": ["2"]
    }
  ],
  "incomplete": []
}

```

Cleaning up a review with id 1.

Cleanup review number 1, reopening any files into the default changelist.

```

curl -u "username:password" -d "reopen=true" \
     "https://my-swarm-host/api/v9/reviews/1/cleanup"

```

Swarm responds with the review and the changelists cleaned. Depending on the completion they will be either detailed in 'complete' or 'incomplete'. Incomplete changelists will have messages indicating why it was not possible to complete:

```
{
  "complete": [
    {
      "1": ["2"]
    }
  ],
  "incomplete": []
}
```

POST /api/v9/reviews/{id}/obliterate

Summary: Obliterate a review (v9+)

Description

Obliterate a review for the given id.

Successful Response:

HTTP/1.1 200 OK

```
{
  "isValid": true,
  "message": "review 1 has been Obliterated",
  "code": 200
}
```

Obliterating a review with id 1.

Obliterating review number 1.

```
curl -u "username:password" "https://my-swarm-
host/api/v9/reviews/1/obliterate"
```

Swarm responds with a message informing you that is has successfully Obliterated the review:

```
{
  "isValid": true,
  "message": "review 1 has been Obliterated",
```

```
"code": 200
}
```

POST /api/v9/reviews/{id}/vote/

Summary: Set the vote for the authenticated user to be up, down or cleared

Description

Set the vote for the authenticated user to be up, down or clear

Parameters

Parameter	Description	Type	Parameter Type	Required
version	Expected to be a valid review revision to vote on if supplied, ignored if the revision does not exist and the vote will apply to the latest revision	string	form	No
vote	Expected to be a valid vote. Valid votes are 'up', 'down' and 'clear'	string	form	Yes

Successful Response:

```
HTTP/1.1 200 OK

{
  "isValid": "true",
  "messages": ["User username set vote to up on review 1"]
}
```

Voting up for review with id 1.

```
curl -u "username:password" \
  "https://my-swarm-host/api/v9/reviews/1/vote/" \
  -d "vote[value]=up" -d "vote[version]=1"
```

Swarm responds with

```
{
  "isValid": "true",
```

```
"messages": ["User username set vote to up on review 1"]
}
```

PATCH /api/v9/reviews/{id}/state/

Summary: Transition the Review State (v2+)

Description

Transition the review to a new state. When transitioning to approved, you can optionally commit the review. (v2+)

Parameters

Parameter	Description	Type	Parameter Type	Required
<code>id</code>	Review ID	integer	path	Yes
<code>state</code>	Review State. Valid options: needsReview, needsRevision, approved, archived, rejected	string	form	Yes
<code>description</code>	An optional description that is posted as a comment for non-commit transitions. Commits that do not include a description default to using the Review description in the resulting change description.	string	form	No
<code>commit</code>	Set this flag to true and provide a state of approved in order to trigger the Approve and Commit action in Swarm.	boolean	form	No
<code>wait</code>	Instruct Swarm to wait for a commit to finish before returning.	boolean	form	No
<code>jobs []</code>	When performing an 'Approve and Commit', one or more jobs can be attached to the review as part of the commit process.	stringArray	form	No

Parameter	Description	Type	Parameter Type	Required
fixStatus	Provide a fix status for the attached job(s) when performing an 'Approve and Commit'. Possible status values vary by job specification, but often include: open, suspended, closed, review, fixed.	string	form	No

Examples of successful responses

Successful Response contains Review Entity:

```
HTTP/1.1 200 OK
```

```
{
  "review": {
    "id": 12207,
    "author": "bruno",
    "changes": [10667, 12000],
    "commits": [],
    "commitStatus": [],
    "created": 1399325913,
    "deployDetails": [],
    "deployStatus": null,
    "description": "Adding .jar that should have been included in
r10145\n",
    "participants": {
      "bruno": []
    },
    "pending": false,
    "projects": [],
    "state": "needsRevision",
    "stateLabel": "Needs Revision",
    "testDetails": [],
    "testStatus": null,
  }
}
```

```
    "type": "default",
    "updated": 1399325913
  },
  "transitions": {
    "needsReview": "Needs Review",
    "approved": "Approve",
    "rejected": "Reject",
    "archived": "Archive"
  }
}
```

Successful Commit contains Review and Commit Entities:

HTTP/1.1 200 OK

```
{
  "review": {
    "id": 12208,
    "author": "bruno",
    "changes": [10667, 12000, 12006],
    "commits": [12006],
    "commitStatus": {
      "start": 1399326910,
      "change": 12006,
      "status": "Committed",
      "committer": "bruno",
      "end": 1399326911
    },
  },
  "created": 1399325900,
  "deployDetails": [],
  "deployStatus": null,
  "description": "Adding .jar that should have been included in
r10145\n",
  "participants": {
    "bruno": []
  },
}
```

```
"pending": false,
"projects": [],
"state": "needsRevision",
"stateLabel": "Needs Revision",
"testDetails": [],
"testStatus": null,
"type": "default",
"updated": 1399325905
},
"transitions": {
  "needsReview": "Needs Review",
  "needsRevision": "Needs Revision",
  "rejected": "Reject",
  "archived": "Archive"
},
"commit": 12006
}
```

Committing a review

To commit a review:

```
curl -u "username:password" -X PATCH -d "state=approved" -d "commit=1" \
  "https://my-swarm-host/api/v9/reviews/123/state/"
```

Swarm responds with the updated review entity, as well as a list of possible transitions for the review:

```
{
  "review": {
    "id": 123,
    "author": "bruno",
    "changes": [122, 124],
    "commits": [124],
    "commitStatus": {
      "start": 1399326910,
      "change": 124,
      "status": "Committed",
      "committer": "bruno",
      "end": 1399326911
    }
  }
}
```

```
    },
    "created": 1399325913,
    "deployDetails": [],
    "deployStatus": null,
    "description": "Adding .jar that should have been included in r110\n",
    "groups": [],
    "participants": {
      "bruno": []
    },
    "pending": false,
    "projects": [],
    "state": "approved",
    "stateLabel": "Approved",
    "testDetails": [],
    "testStatus": null,
    "type": "default",
    "updated": 1399325913,
    "versions": []
  },
  "transitions": {
    "needsReview": "Needs Review",
    "approved": "Approve",
    "rejected": "Reject",
    "archived": "Archive"
  }
}
```

PATCH /api/v9/reviews/{review_id}

Summary: Update Review Description

Description

Update the description field of a review.

Parameters

Parameter	Description	Type	Parameter Type	Required
<code>review_id</code>	Review ID	integer	path	Yes
<code>author</code>	The new author for the specified review. (At least one of Author or Description are required.)	string	form	No
<code>description</code>	The new description for the specified review. (At least one of Description or Author are required.)	string	form	No
<code>_method</code>	Method Override. If your client cannot submit HTTP PATCH, use an HTTP POST with the parameter <code>?_method=PATCH</code> to override.	string	query	No

Examples of successful responses

Successful Response:

HTTP/1.1 200 OK

```
{
  "review": {
    "id": 12306,
    "author": "swarm",
    "changes": [12205],
    "comments": 0,
    "commits": [],
    "commitStatus": [],
    "created": 1402507043,
    "deployDetails": [],
    "deployStatus": null,
    "description": "Updated Review Description\n",
    "participants": {
      "swarm": []
    }
  },
}
```

```
"pending": true,
"projects": [],
"state": "needsReview",
"stateLabel": "Needs Review",
"testDetails": [],
"testStatus": null,
"type": "default",
"updated": 1402518492
},
"transitions": {
  "needsRevision": "Needs Revision",
  "approved": "Approve",
  "rejected": "Reject",
  "archived": "Archive"
},
"canEditAuthor": true
}
```

Note

Swarm returns `null` for `totalCount` if no search filters were provided. `lastSeen` can often be used as an offset for pagination, by using the value in the `after` parameter of subsequent requests.

When no results are found, the `reviews` array is empty:

```
HTTP/1.1 200 OK

{
  "lastSeen": null,
  "reviews": [],
  "totalCount": 0
}
```

Users : Basic API controller providing a simple version action

GET /api/v9/users/

Summary: Get List of Users

Description

Returns a list of users in Swarm.

Parameters

Parameter	Description	Type	Parameter Type	Required
fields	An optional comma-separated list (or array) of fields to show for each user. Omitting this parameter or passing an empty value shows all fields. Beaware the fields are case sensitive for users. You can use one of the below: User, Type, Email, Update, Access, FullName, JobView, Password, AuthMethod, Reviews	string	query	No
users	An optional comma-separated list (or array) of users to display. Omitting this parameter or passing an empty value shows all users.	string	query	No
group	An optional to get users from a group. Cannot be used with users parameter	string	query	No

Successful Response:

```
HTTP/1.1 200 OK
```

```
{
  "User": "bruno",
  "Type": "standard",
  "Email": "bruno@perforce.com",
  "Updated": "2005/10/11 21:05:15",
  "Access": "2018/04/12 14:55:10",
```

```
"FullName": "Bruno First",  
"JobView": null,  
"Password": null,  
"AuthMethod": "perforce",  
"Reviews": []  
}
```

Listing projects

To list all projects:

```
curl -u "username:password" "https://my-swarm-  
host/api/v9/users?fields=User,FullName&users=super,bruno"
```

Pagination is not currently supported by this endpoint. Swarm responds with a list of all users:

```
{  
  {  
    "User": "bruno",  
    "FullName": "Bruno First"  
  },  
  {  
    "User": "super",  
    "FullName": "Super Second"  
  }  
}
```

GET /api/v9/users/{user}/unfollowall

Summary: Unfollow all Users and Projects

Description

Admin and super users are permitted to execute unfollow all against any target user. Other users are only permitted to execute the call if they themselves are the target user

Successful Response:

```
HTTP/1.1 200 OK
```

```
{
```

```
"isValid": true,
"messages": "User {user} is no longer following any Projects or
Users."
}
```

Workflows : Controller for querying, creating and updating workflows.

GET /api/v9/workflows/

Summary: Gets workflows

Description

Get all workflows

Parameters

Parameter	Description	Type	Parameter Type	Required
fields	An optional comma-separated list (or array) of fields to show for each workflow. Omitting this parameter or passing an empty value shows all fields.	string	query	No
noCache	If provided and has a value of 'true' a query will always be performed and the cache of workflows is ignored. Otherwise the cache will be used if it exists.	boolean	query	No

Successful Response:

```
HTTP/1.1 200 OK

{
"workflows": [{
  "id": "1",
  "name": "myWorkflow",
```

```
"description": "A description",
"on_submit": {
  "with_review": {
    "rule": "no_checking"
  },
  "without_review": {
    "rule": "no_checking"
  }
},
"auto_approve": {
  "rule": "never"
},
"counted_votes": {
  "rule": "anyone"
},
"shared": "true",
"owners": [
  "user1",
  "user2"
]
},
{
  "id": "2",
  "name": "myWorkflow 2",
  "description": "A description" ,
  "on_submit": {
    "with_review": {
      "rule": "no_checking"
    },
    "without_review": {
      "rule": "no_checking"
    }
  },
  "auto_approve": {
    "rule": "votes"
  },
}
```

```
"counted_votes": {
  "rule": "members"
},
"shared": "true",
"owners": [
  "user3",
  "user4"
]
}
]
}
```

Get a list of workflows

```
```bash
curl -u "username:password" \
 "https://my-swarm-host/api/v9/workflows"
```
```

JSON Response:

```
```json
{
 "workflows": [{
 "id": "1",
 "name": "myWorkflow",
 "description": "A description",
 "on_submit": {
 "with_review": {
 "rule": "no_checking"
 },
 "without_review": {
 "rule": "no_checking"
 }
 },
 "auto_approve": {
 "rule": "never"
 },
 "counted_votes": {
 "rule": "anyone"
 },
 "shared": "true",
 "owners": [
```

```
 "user1",
 "user2"
]
},
{
 "id": "2",
 "name": "myWorkflow 2",
 "description": "A description" ,
 "on_submit": {
 "with_review": {
 "rule": "no_checking"
 },
 "without_review": {
 "rule": "no_checking"
 }
 },
 "auto_approve": {
 "rule": "votes"
 },
 "counted_votes": {
 "rule": "members"
 },
 "shared": "true",
 "owners": [
 "user3",
 "user4"
]
}
]
}
}
...

```

## GET /api/v9/workflows/{id}

Summary: Gets a workflow by id

### Description

Gets a workflow by id



## Parameters

Parameter	Description	Type	Parameter Type	Required
<b>fields</b>	An optional comma-separated list (or array) of fields to show for each workflow. Omitting this parameter or passing an empty value shows all fields.	string	query	No

---

## Successful Response:

HTTP/1.1 200 OK

```
{
 "workflow": {
 "id": "1",
 "name": "myWorkflow",
 "description": "A description",
 "on_submit": {
 "with_review": {
 "rule": "no_checking"
 },
 "without_review": {
 "rule": "no_checking"
 }
 },
 "auto_approve": {
 "rule": "never"
 },
 "counted_votes": {
 "rule": "anyone"
 },
 "shared": "true",
 "owners": [
 "user1",
 "user2"
]
 }
}
```

```
}
}
```

## Get a list of workflows

```
```bash
curl -u "username:password" \
     "https://my-swarm-host/api/v9/workflows/1"
```
```

JSON Response:

```
```json
{
  "workflow": {
    "id": "1",
    "name": "myWorkflow",
    "description": "A description",
    "on_submit": {
      "with_review": {
        "rule": "no_checking"
      },
      "without_review": {
        "rule": "no_checking"
      }
    },
    "auto_approve": {
      "rule": "never"
    },
    "counted_votes": {
      "rule": "anyone"
    },
    "shared": "true",
    "owners": [
      "user1",
      "user2"
    ]
  }
}
```
```

## POST /api/v9/workflows/

Summary: Create a workflow

## Description

Create a new workflow.

## Parameters

| Parameter            | Description                                                                                                                                                                     | Type               | Parameter Type | Required |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------|----------|
| <b>name</b>          | The workflow name. Will be compared against other workflows and rejected if not unique                                                                                          | string             | form           | Yes      |
| <b>description</b>   | Description for the new workflow                                                                                                                                                | string             | form           | No       |
| <b>shared</b>        | Whether this workflow is shared for other users that do not own it. Defaults to not shared                                                                                      | boolean            | form           | No       |
| <b>owners</b>        | A list owners for the workflow. Can be users or group names (prefixed with swarm-group-). Users and group names must exist or the workflow will be rejected                     | array (of strings) | form           | No       |
| <b>on_submit</b>     | Data for rules when changes are submitted. Valid values for with_review are no_checking, approved, strict. Valid values for without review are no_checking, auto_create, reject | array              | form           | No       |
| <b>end_rules</b>     | Data for rules when changes are submitted. Valid values are no_checking, no_revision.                                                                                           | array              | form           | No       |
| <b>auto_approve</b>  | Data for rules when changes are submitted. Valid values are votes, never.                                                                                                       | array              | form           | No       |
| <b>counted_votes</b> | Data for rules when counting votes up. Valid values are anyone, members.                                                                                                        | string             | form           | No       |

## Successful Response:

```
HTTP/1.1 200 OK
```

```
{
 "workflow": {
 "id": "1",
 "name": "myWorkflow",
 "description": "A description",
 "on_submit": {
 "with_review": {
 "rule": "no_checking"
 },
 "without_review": {
 "rule": "no_checking"
 }
 },
 "auto_approve": {
 "rule": "never"
 },
 "counted_votes": {
 "rule": "members"
 },
 "shared": "true",
 "owners": [
 "user1",
 "user2"
]
 }
}
```

## Create a workflow

```
```bash
curl -u "<user>:<password>" \
  -H "Content-Type: application/json" \
  -X POST \
  -d '{"name": "myWorkflow", \
    "owners": ["user1", "user2"], \
    "description": "A description", \
    "shared": true, \
    "on_submit":{ \
```

```
    "with_review":{"rule": "no_checking"},' \
    "without_review":{"rule": "no_checking"}}' \
    "auto_approve": "never", \
    "counted_votes": "members", \
    "https://my-swarm-host/api/v9/workflows"
...

```

JSON Response:

```
```json
{
 "workflow": {
 "id": "1",
 "name": "myWorkflow",
 "description": "A description",
 "on_submit": {
 "with_review": {
 "rule": "no_checking"
 },
 "without_review": {
 "rule": "no_checking"
 }
 },
 "auto_approve": {
 "rule": "never"
 },
 "counted_votes": {
 "rule": "members"
 },
 "shared": "true",
 "owners": [
 "user1",
 "user2"
]
 }
}
...

```

## PATCH /api/v9/workflows/{id}

Summary: Patch a workflow

### Description

Patch a workflow.

## Parameters

Parameter	Description	Type	Parameter Type	Required
<b>id</b>	The id of the workflow being patched	string	form	Yes
<b>name</b>	The workflow name. Will be compared against other workflows and rejected if not unique	string	form	No
<b>description</b>	Description for the new workflow	string	form	No
<b>shared</b>	Whether this workflow is shared for other users that do not own it. Defaults to not shared	boolean	form	No
<b>owners</b>	A list owners for the workflow. Can be users or group names (prefixed with swarm-group-). Users and group names must exist or the workflow will be rejected	array (of strings)	form	No
<b>on_submit</b>	Data for rules when changes are submitted. Valid values for with_review are no_checking, approved, strict. Valid values for without review are no_checking, auto_create, reject	array	form	No
<b>end_rules</b>	Data for rules when changes are submitted. Valid values are no_checking, no_revision.	array	form	No
<b>auto_approve</b>	Data for rules when changes are submitted. Valid values are votes, never.	array	form	No
<b>counted_votes</b>	Data for rules when counting votes up. Valid values are anyone, members.	string	form	No

## Successful Response:

```
HTTP/1.1 200 OK
```

```
{
```

```
"workflow": {
 "id": "1",
 "name": "myWorkflow",
 "description": "A description",
 "on_submit": {
 "with_review": {
 "rule": "no_checking"
 },
 "without_review": {
 "rule": "no_checking"
 }
 },
 "auto_approve": {
 "rule": "never"
 },
 "counted_votes": {
 "rule": "anyone"
 },
 "shared": "true",
 "owners": [
 "user1",
 "user2"
]
}
}
```

## Update a workflow

```
```bash
curl -u "username:password" \
  -X PATCH \
  -d "name=myWorkflow" \
  -d "description=A description" \
  "https://my-swarm-host/api/v9/workflows/1"
```
```

JSON Response:

```
```json
```

```

{
  "workflow": {
    "id": "1",
    "name": "myWorkflow",
    "description": "A description",
    "on_submit": {
      "with_review": {
        "rule": "no_checking"
      },
      "without_review": {
        "rule": "no_checking"
      }
    },
    "auto_approve": {
      "rule": "never"
    },
    "counted_votes": {
      "rule": "anyone"
    },
    "shared": "true",
    "owners": [
      "user1",
      "user2"
    ]
  }
}
...

```

DELETE /api/v9/workflows/{id}

Summary: Delete a workflow

Description

Delete a workflow for the provided id. This call must be authenticated and the user must have permission to edit the workflow. If the workflow is in use it cannot be deleted and an error message will be returned

Parameters

Parameter	Description	Type	Parameter Type	Required
id	The id of the workflow being deleted	string	form	Yes

Examples of successful responses

Successful Response:

```
HTTP/1.1 200 OK

{
  "isValid": true,
  "messages": [
    "Workflow [1] was deleted"
  ]
}
```

Successful Response:

```
HTTP/1.1 200 OK

{
  "isValid": false,
  "messages": [
    "Cannot delete workflow [1], it is in use on project [project1,
project2]"
  ]
}
```

Successful Response:

```
HTTP/1.1 200 OK

{
  "isValid": false,
  "messages": [
    "Cannot delete workflow [1], it is in use on project [project1] and
others"
  ]
}
```

Successful Response:

```
HTTP/1.1 200 OK

{
  "isValid": false,
  "messages": [
    "Cannot delete workflow [1], it is in use"
  ]
}
```

Examples of usage

Delete a workflow not in use

```
curl -u "<user>:<password>" \
  -X DELETE \
  "https://my-swarm-host/api/v9/workflows/1"
```

Delete a workflow that is in use on public projects

```
curl -u "<user>:<password>" \
  -X DELETE \
  "https://my-swarm-host/api/v9/workflows/1"
```

Delete a workflow that is in use on a public and some private projects

```
curl -u "<user>:<password>" \
  -X DELETE \
  "https://my-swarm-host/api/v9/workflows/1"
```

Delete a workflow that is in use on only private projects

```
curl -u "<user>:<password>" \
  -X DELETE \
  "https://my-swarm-host/api/v9/workflows/1"
```

PUT /api/v9/workflows/{id}

Summary: Update a workflow

Description

Update a workflow. All values should be provided in the request. If not provided any missing values are reverted to default.

Parameters

Parameter	Description	Type	Parameter Type	Required
id	The id of the workflow being patched	string	form	Yes
name	The workflow name. Will be compared against other workflows and rejected if not unique	string	form	Yes
owners	A list owners for the workflow. Can be users or group names (prefixed with swarm-group-). Users and group names must exist or the workflow will be rejected	array (of strings)	form	No
description	Description for the new workflow	string	form	No
shared	Whether this workflow is shared for other users that do not own it. Defaults to not shared	boolean	form	No
on_submit	Data for rules when changes are submitted. Valid values for with_review are no_checking, approved, strict. Valid values for without review are no_checking, auto_create, reject	array	form	No
end_rules	Data for rules when changes are submitted. Valid values are no_checking, no_revision.	array	form	No
auto_approve	Data for rules when changes are submitted. Valid values are votes, never.	array	form	No
counted_votes	Data for rules when counting votes up. Valid values are anyone, members.	string	form	No

Successful Response:

```
HTTP/1.1 200 OK
```

```
{
  "workflow": {
    "id": "1",
    "name": "myWorkflow",
    "description": "A description",
    "on_submit": {
      "with_review": {
        "rule": "no_checking"
      },
      "without_review": {
        "rule": "no_checking"
      }
    },
    "auto_approve": {
      "rule": "votes"
    },
    "counted_votes": {
      "rule": "anyone"
    },
    "shared": "true",
    "owners": [
      "user1",
      "user2"
    ]
  }
}
```

Update a workflow

```
```bash
curl -u "<user>:<password>" \
 -H "Content-Type: application/json" \
 -X POST \
 -d '{"name": "myWorkflow", \
```

```

 "owners": ["user1", "user2"], \
 "description": "A description", \
 "shared": true, \
 "on_submit":{ \
 "with_review":{"rule": "no_checking"},' \
 "without_review":{"rule": "no_checking"}}' \
 "https://my-swarm-host/api/v9/workflows/1"
...

```

JSON Response:

```

```json
{
  "workflow": {
    "id": "1",
    "name": "myWorkflow",
    "description": "A description",
    "on_submit": {
      "with_review": {
        "rule": "no_checking"
      },
      "without_review": {
        "rule": "no_checking"
      }
    },
    "auto_approve": {
      "rule": "votes"
    },
    "counted_votes": {
      "rule": "anyone"
    },
    "shared": "true",
    "owners": [
      "user1",
      "user2"
    ]
  }
}
...

```

Extended API example

This section includes an extended API example, involving multiple API calls to answer a more complicated kind of question than any single API endpoint can provide: which reviews does a specific userid need to attend to?

The code

```
<?php
/**
 * vim:set ai si et ts=4 sw=4 syntax=php:
 *
 * reviews.php
 *
 * Queries the Swarm API and reports which reviews a specified user
 * needs to attend to.
 *
 * Required attention is determined by the following criteria:
 * - the user is a participant in a review
 * - and the user has not voted on the review
 * - and the user has not commented on the review
 * - or the user's comment on the review is a
 *   task that has been addressed and needs verification
 */

if (ini_set('track_errors', 1) === false) {
    echo "Warning: unable to track errors.\n";
}

# process command-line arguments
$options = getopt(
    'hs:r:v',
    array('help', 'swarm:', 'reviewer', 'verbose')
);

$swarm = '';
if (isset($options['s'])) {
    $swarm = $options['s'];
}
if (isset($options['swarm'])) {
    $swarm = $options['swarm'];
}
```

```
if (!$swarm) {
    usage('Swarm API URL not provided.');
```

```
}

$reviewer = '';
if (isset($options['r'])) {
    $reviewer = $options['r'];
}
if (isset($options['reviewer'])) {
    $reviewer = $options['reviewer'];
}
if (!$reviewer) {
    usage('Swarm reviewer not provided.');
```

```
}

$verbose = false;
if (isset($options['v']) || isset($options['verbose'])) {
    $verbose = true;
}

if (isset($options['h']) || isset($options['help'])) {
    usage();
}

function usage($message = null)
{
    if ($message) {
        echo "$message\n\n";
    }

    $script = basename(__FILE__);
    echo <<<EOU
$script: -s <Swarm URL> -u <API userid> -p <API user's password> \
    -r <reviewer userid to report on> -h

-s|--swarm      Swarm's URL (e.g. https://user@password:myswarm.url/)
```

```
-r|--reviewer  The reviewer to report on.  
-h|--help      This help text.  
-v|--verbose   Verbose output.
```

This script queries the Swarm API and reports on reviews that the specified user needs to attend to.

Note: If your Helix Core Server (p4d) has security level 3 set, you cannot use a password to authenticate; you must acquire a host-unlocked ticket from p4d, and use the ticket in place of a password when communicating with the Swarm API connected to p4d.

```
EOU;  
    exit;  
}  
  
function msg($message)  
{  
    global $verbose;  
  
    if ($verbose) {  
        echo $message;  
    }  
}  
  
function call_api($url, $params)  
{  
    global $php_errormsg;  
  
    $query    = http_build_query($params);  
    $request  = $url . '?' . $query;  
    $response = @file_get_contents($request);  
    if ($php_errormsg) {  
        echo "Unable to call api: $php_errormsg\n";  
        exit;  
    }  
}
```



```
$json = @json_decode($response, true);
if ($php_errormsg) {
    echo "Unable to decode api response: $php_errormsg\n";
    exit;
}

return $json;
}

# remove trailing / from URL, if it exists
$swarm = rtrim(trim($swarm), '/');

# fetch the list of reviews
$reviews = call_api(
    "$swarm/api/v4/reviews",
    array(
        'hasReviewers' => 1, # only reviews with participants
        'participants' => array($reviewer), # only review for this
reviewer
        'max'          => 9, # get plenty of reviews, if available
        'fields'       => array('id', 'description', 'commits'), # get
these fields
    )
);

$report = array();
foreach ($reviews['reviews'] as $review) {
    if (is_null($review)) {
        continue;
    }

    $flag = false;
    msg('Review: ' . $review['id'] . ' ');

    # if the review is already committed, it likely does not need
```

```
attention
  if (array_key_exists('commits', $review)
      && count($review['commits']))
  ) {
    msg("is committed, skipping...\n");
    continue;
  }

  # if the review has a vote from the reviewer, they are already aware
  if (array_key_exists('participants', $review)
      && array_key_exists('vote', $review['participants'][$reviewer]))
  ) {
    msg("has vote from reviewer, skipping...\n");
    continue;
  }

  # if there are no open comments on the review, the reviewer's
  # attention is required
  if (array_key_exists('comments', $review)
      && $review['comments'][0] == 0)
  ) {
    msg("has no open comments, skipping...\n");
    continue;
  }

  # fetch the comments for this review
  $comments = call_api(
    "$swarm/api/v4/comments",
    array(
      'topic' => 'reviews/' . $review['id'], # comments for this
review
      'max'    => 9, # get plenty of comments, if available
    )
  );

  foreach ($comments['comments'] as $comment) {
```

```
msg("\n Comment: " . $comment['id'] . ' ');

// skip over comments from other reviewers
if (array_key_exists('user', $comment) && $reviewer != $comment
['user']) {
    msg("is by another user, carry on...\n");
    continue;
}

# skip archived comments
if (array_key_exists('flags', $comment)
    && count($comment['flags']) > 0
    && $comment['flags'][0] == 'closed'
) {
    msg("is archived, carry on...\n");
    continue;
}

# skip marked tasks
if (array_key_exists('taskState', $comment)
    && ($comment['taskState'] == 'comment'
        || $comment['taskState'] == 'verified'
        || $comment['taskState'] == 'open'
    )
) {
    msg("reviewer's comment needs attention, carry on...\n");
    continue;
}

// anything else means that the reviewer's comment needs attention
// by the reviewer
$flag = true;
msg("needs attention!\n");
break;
}
```

```

// evaluation is complete. Does this review need attention?
if ($flag) {
    $report[] = $review;
}
}

if (count($report)) {
    echo "User '$reviewer' needs to attend to these reviews:\n";
    foreach ($report as $review) {
        $description = trim($review['description']);
        if (strlen($description) > 60) {
            $description = substr($description, 0, 60) . ' ...';
        }
        echo $review['id'] . ": $description\n";
    }
} else {
    echo "User '$reviewer' has no reviews to attend to.\n";
}

```

Executing the example

The example is written in PHP. To use it, [download the code](#), or copy and paste it into a file called `reviews.php`. Then, execute it like this:

```
$ php reviews.php -s https://myswarm.host:port/ -r bob
```

Replace `http://myswarm.host/` with the URL to your Swarm installation. Replace `bob` with the userid you'd like to report on.

To authenticate, insert `username:password@` before the hostname. If your Helix Core Server security counter is set to 3 or higher, you need to acquire a ticket and use the ticket in place of the password (see [Authentication](#) for details). If your Swarm is installed on a [custom port](#), or is installed in a [sub-folder](#), include those elements in the URL as well. For example:

```
$ php reviews.php -s
https://me:F0FC33068BA244B1BBD8196CC9166F34@my.host:8080/swarm/ -
r bob
```

If you do not specify the URL correctly, you might see an error like:

```
Unable to call api: file_get_contents
```

```
(http://...@my.host:8080/swarm/api/v9/reviews?hasReviewers=1&participants%5B0%5D=bob&max=9&fields%5B0%5D=id&fields%5B1%5D=description&fields%5B2%5D=commits): failed to open stream: HTTP request failed! HTTP/1.1 404 Not Found
```

If there are no errors, and the specified userid does have reviews to attend to, the output might look like:

```
1234: Added grapple-grommit support to woozlewobble class. @bob sh  
...
```

1234 is the id of a review that bob should attend to, followed by the first 60 characters of the review's description.

Pending Review Cleanup

This section contains an example script that cleans up pending changelists which are no longer needed. See the [review cleanup](#) options for how this can be done automatically when a review is committed.

For pending changelists which were present before this option was available, or for reviews which have been contributed to by multiple authors and so require super user access to tidy up, there is an API which allows the super user to bulk remove such changelists.

The script demonstrates how this API could be used. It isn't meant as a complete solution, just a guide to demonstrate what is possible.

The code

```
<?php  
/**  
 * Perforce Swarm  
 *  
 * @copyright 2017 Perforce Software. All rights reserved.  
 * @license Please see LICENSE.txt in top-level folder of this  
distribution.  
 * @version <release>/<patch>  
 */  
/**  
 * This example script can be used to clean up (delete) Perforce Server  
pending changelists automatically when run  
 * as a super user. It is able to query for reviews based on parameters to  
establish which changelists are eligible  
 * for clean up. In this way, it can be tailored to run against reviews of
```

```
a user's choice.

* Requirements for this script:
*   - MUST be a super user
*   - MUST populate the parameters below
*   - MUST be using Swarm 2017.1 or later
*
* Usage of script
*   php superUserReviewCleanUp.php max=10 notUpdatedSince=2017-04-01
state=approved
*   php superUserReviewCleanUp.php max=10 author=bruno state=approved
*
* Each of the parameters that you can use are documented at the following
URL:
*
https://www.perforce.com/perforce/doc.current/manuals/swarm/api.endpoints.
html#api.endpoints.Reviews.getReviews
*
*
* This returns a JSON object that contains four main objects.
*
* {
*   "error": "",
*   "help": "",
*   "results": "[]",
*   "search_criteria": {
*     "fields": "id",
*     "max": "10",
*     "notUpdatedSince": "2017-04-01"
*   }
* }
*
* Referencing the example above:
*
* The error section will contain any errors that have been encountered
trying to execute the script.
```

```
*
* The help section will populated if you have run the command php
superUserReviewCleanUp.php help
*
* The search_criteria section indicates which parameters have been used
to fetch the reviews list.
*
* The results section returns a JSON object of each of the reviews it has
processed, which may
* include actions that were incomplete.
*
* Below is an example of results being processed:
* "814": {
*   "complete": [],
*   "incomplete": {
*     "814": {
*       "813": [
*         "0": "Command failed: No shelved files in changelist to
delete.",
*       ]
*     }
*   },
* "818": {
*   "complete": [],
*   "incomplete": []
* }
* "820": {
*   "complete": [],
*   "incomplete": {
*     "820": {
*       "821": [
*         "0": "Command failed: No shelved files in changelist to
delete.",
*         "1": "Command failed: Usage: fix [ -d ] [ -s status ] -c
changelist# jobName ...\nMissing/wrong
```

```
*          number of arguments."
*      ]
*      }
*      }
* },
*
* Some reviews may have no actions or incomplete actions. Incomplete
actions indicate that additional work is required
* and the review could not be entirely cleaned up. In the example above,
the first message indicates a changelist was
* not found. This could be because the end user has already deleted it.
*
* An error with the fix command can indicate that the pending changelist
doesn't have any jobs linked or that the jobs
* have already been removed.
*
* NOTES:
* To make the the output print nicely, you can use the python command
like this:
*
* php superUserReviewCleanUp.php max=10 notUpdatedSince=2018-04-01
state=approved | python -m json.tool
*
*/

/* ***** */
/* These values MUST be set before running the script. */
/* ***** */

// URL to access swarm. Must not include trailing slash.
$swarmURL = 'http://my.swarm.com';
// Username of super user
$username = '';
// Ticket for user, can be created by running "p4 -u $username login -pa"
$ticket = '';
```



```
/* ***** */

// If the super user wants to reopen the files of the end user.
$reopen = true;
// Prebuild the the return message helper array.
$help = array( "help" => "", "error" => "", "results" => "", "search_
criteria" => "");
// @codingStandardsIgnoreEnd
/**
 * function that make the GET or POST requests
 *
 * @param $url      Url in which we want to make our request to
 * @param bool $fetch Set to true for a GET request, otherwise will do a
POST.
 * @param array $args These are the parameter that we pass the the GET or
POST request to filter the reviews
 * @return JSON      We return a JSON object back to be worked on.
 */
function request($url, $fetch = false, $args = array())
{
    // Fetch the settings to allow this function to access them.
    global $username, $ticket, $reopen, $help;
    $curl = '';

    // If GET request fetch should be true and args shouldn't be empty
    if ($fetch === true) {
        // If is args is empty just give the url, otherwise build a http
query with args elements
        $curl = empty($args) ? curl_init($url) : curl_init($url."?".http_
build_query($args));
    } else {
        // Assume fetch is false and build a POST request.
        $curl = curl_init($url."/".$args['id'].'/cleanup');
        curl_setopt($curl, CURLOPT_POSTFIELDS, http_build_query(array
```

```
('reopened'=>$reopen));
    curl_setopt($curl, CURLOPT_POST, count($reopen));
}
curl_setopt($curl, CURLOPT_USERPWD, "$username:$ticket");
curl_setopt($curl, CURLOPT_RETURNTRANSFER, true);
curl_setopt($curl, CURLOPT_HTTPAUTH, CURLAUTH_BASIC);

$result = curl_exec($curl);

// Catch the error code in case Ticket expired or url doesn't return.
$statuscode = curl_getinfo($curl, CURLINFO_HTTP_CODE);
if ($statusCode != 200) {
    $help['error'] = array("HTTP code" => $statusCode);
}

curl_close($curl);
return json_decode($result, true);
}

/**
 * Fetch a list of Reviews based on parameters
 *
 * @param $elements Each of the args passed from command line are treated
as elements
 * @return JSON      We return a JSON object back to be worked on.
 */
function fetchReviews($elements)
{
    global $swarmURL, $help;
    $parameters = array();

    if ($elements !== null) {
        // Loop though each of the args we want to fetch reviews based on
        foreach ($elements as $key => $value) {
            // Break each of the element into key and value to allow use
to build a array to pass to url
```

```
        $brokenDown = explode("=", $value);
        if ($key !== 0 && sizeof($brokenDown) === 2) {
            $parameters[$brokenDown[0]] = $brokenDown[1];
        }
    }
    // We only require the field id to limit the amount of data.
    $parameters['fields'] = 'id';
    // Helpful for debugging which parameters we have passed in the
queue.
    $help['search_criteria'] = $parameters;
}
// Now make the request to the Swarm server with your field options.
$result = request(
    "$swarmURL/api/v6/reviews",
    true,
    $parameters
);

// Return the JSON object back to be worked on.
return $result;
}

/**
 * Loop though each of the Reviews passed in and run clean up for them.
 *
 * @param $reviews JSON object of all the reviews we want to run cleanup
on
 * $reviews => array(
 *     'reviews' => array(
 *         0 => array (
 *             'id' => 134,
 *         ),
 *         1 => array (
 *             'id' => 136,
 *         ),
 *         2 => array (
```

```
*             'id' => 143,
*         ),
*         3 => array (
*             'id' => 158,
*         )
*     )
* )
*
* @return $array    return the array of work that has been carried out.
*/
function runCleanup($reviews)
{
    global $swarmURL;
    $results = array();
    // Check if there is an reviews element of the array
    if (isset($reviews['reviews'])) {
        foreach ($reviews['reviews'] as $review) {
            // Now make the request to the Swarm for each review.
            $results[$review['id']] = request(
                "$swarmURL/api/v6/reviews",
                false,
                $review
            );
        }
    }
    return $results;
}

/**
 * The help function in case a user doesn't set the basic settings.
 *
 * @param $help    Pass the help array from main script to append the
helpful message.
 * @return $array  Return the array that will be presented to the users.
 */
function helpMessage($help)
```

```
{
    $help["help"]      = array( "1" => "", "2" => "", "3" => "" );
    $help["help"]["1"] = "Please ensure you have set the Username, Ticket
and Swarm URL before using this script";
    $help["help"]["2"] = "Running the script can be done by using any of
the standard Swarm API fields for reviews";
    $help["help"]["3"] = "Visit
https://www.perforce.com/perforce/doc.current/manuals/swarm/index.html";
    return $help;
}

// check the first argument is not help.
$helpSet = isset($argv[1]) && $argv[1] == "help" ? "help" : null;

// Check if the user has given help as a command to this script.
if (isset($argv[1]) && $helpSet == "help") {
    // Set the $help array with the help message.
    $help = helpMessage($help);
}

// Check if the basic user ticket and swarmurl are set.
if (!empty($username) && !empty($ticket) && !empty($swarmURL) && $helpSet
!= "help") {
    try {
        $help["results"] = runCleanup(fetchReviews($argv));
    } catch (Exception $e) {
        $help = helpMessage($help);
    }
} else {
    $message      = "Please ensure you have set the below before using this
script";
    $errorArray = array("message" => $message, "parameter" => "");

    $missingParameter = array();

    // Now check if the basic settings are empty and show the end user.
```

```
empty($username) ? $missingParameter[] = "Username:''";
empty($ticket) ? $missingParameter[] = "Ticket:''";
empty($swarmURL) ? $missingParameter[] = "SwarmURL:''";

$errorArray['parameter'] = $missingParameter;

$help["error"] = $errorArray ;
}
// Output the end result of the what the script does.
echo json_encode($help, JSON_FORCE_OBJECT);
// @codingStandardsIgnoreEnd
```

Executing the script

The example is written in PHP, and demonstrates how to make use of the APIs which remove unneeded pending changelists. It **must** be run as a super user.

For a full set of instructions on how to use the example script, see the comments in the script itself.

Abbreviated instructions:

1. Set the value of the `$swarmURL`, `$username` and `$ticket` variables.
2. Run the script by using a command similar to the following:

```
$ php pendingReviewCleanup.php max=10 author=bruno state=approved
```

Contact Perforce

We look forward to hearing about your experiences with Swarm, positive or negative, including *must-haves* or *it would be great if Swarm....* Feel free to contact us:

- **Post a message on our [public forums](#).**

The forums are a great way to discuss Swarm with other Swarm users and the Swarm development team.

- **Email support@perforce.com and reference "Swarm" in the subject line.**

Email is preferable when you need direct assistance.

- **Phone us and ask for assistance with Swarm.**

When you need immediate assistance, calling us is the quickest way to resolve a Swarm problem. We have international offices; call the office closest to you:

- North America: +1 510.864.7400
- Europe: +44 (0) 1189 771020
- Australia: +61 2 8912-4600

Complete contact information is available on the [Perforce web site](#).

License statements

This distribution includes the following Perforce software; please consult the following for the license terms that apply to these pieces of software only:

P4PHP, the Perforce extension for PHP

Location: `SWARM_ROOT/p4-bin/bin.platform`

Terms of Use: <https://www.perforce.com/downloads/terms-use>

This distribution also includes the following third party software; please consult the accompanying license file for the license terms that apply to that software only:

Arimo Font

Location: `SWARM_ROOT/public/vendor/arimo`

License: `SWARM_ROOT/public/vendor/arimo/OFL.txt`

Bootstrap

Location: `SWARM_ROOT/public/vendor/bootstrap`

License: `SWARM_ROOT/public/vendor/bootstrap/LICENSE`

Cousine Font

Location: `SWARM_ROOT/public/vendor/cousine`

License: `SWARM_ROOT/public/vendor/cousine/OFL.txt`

Git Logo

Location: `SWARM_ROOT/public/vendor/git`

License: `SWARM_ROOT/public/vendor/git/CC-LICENSE.txt`

Google Diff-Match-Patch

Location: `SWARM_ROOT/public/vendor/diff_match_patch`

License: `SWARM_ROOT/public/vendor/diff_match_patch/COPYING`

Google Code Prettify

Location: `SWARM_ROOT/public/vendor/prettify`

License: `SWARM_ROOT/public/vendor/prettify/COPYING`

jQuery

Location: `SWARM_ROOT/public/vendor/jquery`

License file: `SWARM_ROOT/public/vendor/jquery/MIT-LICENSE.txt`

jQuery Expander

Location: `SWARM_ROOT/public/vendor/jquery.expander`

License file: `SWARM_ROOT/public/vendor/jquery.expander/license.txt`

jQuery Sortable

Location: `SWARM_ROOT/public/vendor/jquery-sortable`

License file: `SWARM_ROOT/public/vendor/jquery-sortable/LICENSE.txt`

jQuery Timeago

Location: `SWARM_ROOT/public/vendor/jquery.timeago`

License file: `SWARM_ROOT/public/vendor/jquery.timeago/MIT-LICENSE.txt`

JsRender

Location: `SWARM_ROOT/public/vendor/jsrender`

License file: `SWARM_ROOT/public/vendor/jsrender/MIT-LICENSE.txt`

Parsedown

Location: `SWARM_ROOT/library/Parsedown`

License file: `SWARM_ROOT/library/Parsedown/LICENSE.txt`

ThreeJS

Location: `SWARM_ROOT/public/vendor/threejs`

License file: `SWARM_ROOT/public/vendor/threejs/LICENSE`

Zend Framework 2

Location: `SWARM_ROOT/library/Zend`

License file: `SWARM_ROOT/library/Zend/LICENSE.txt`